


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

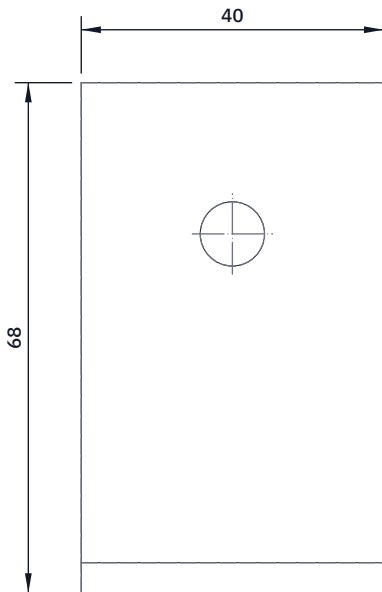


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

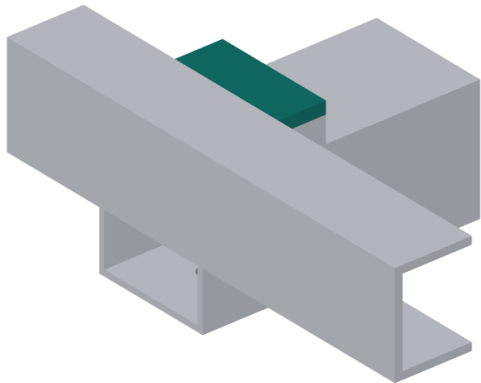

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bracket: 4 mm sheet 40 wide, folded 90 degrees to an L: a

67.5 mm foot and a 21 mm upright.

Foot: one 8.5 mm hole on the centre line, 47.5 from the

outside of the upright.

Upright: two M5 tapped holes on the centre line, 10 and 20 up

from the foot, matching the rail web holes.

Spacer (rail-start member, 2): 40 x 40 x 8.5, 8.5 mm hole.

Shim (near member, 2): 40 x 40 x 2.5, 8.5 mm hole.

Fit: the upright inside the rail against its web, the foot

on the rail's bottom flange and on the spacer or shim.

Check: the rail top lines up with the module frame top.

DUSTRUNNER

github.com/BoujeeEnjinia1701/dustrunner

DustRunner rail bracket (make 4), spacer and shim: making sketch

DRAWING NO.

DRN-DWG-114

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:1

UNITS

mm

PROJECTION



DATE

2026-09-30

DRAWN

Amish Chadha

MATERIAL / NOTES

Aluminium sheet 4 mm, 5083; plate 8.5 mm; sheet 2.5 mm