




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

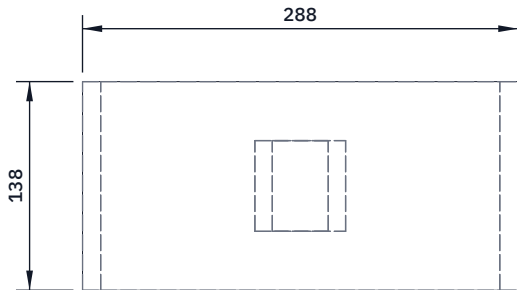


TOP VIEW
Scale 1:5; looking down (along -Z)

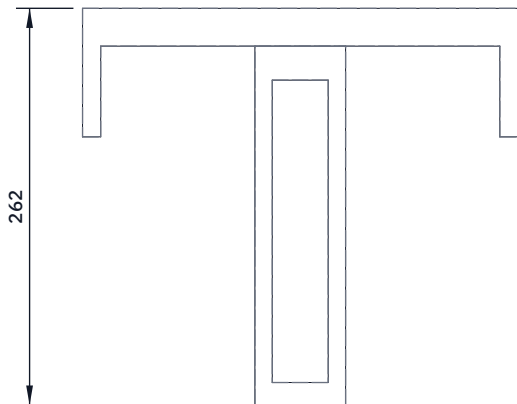

FRONT VIEW
Scale 1:5; looking at the front (along +Y)

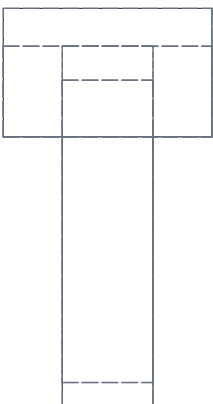

RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

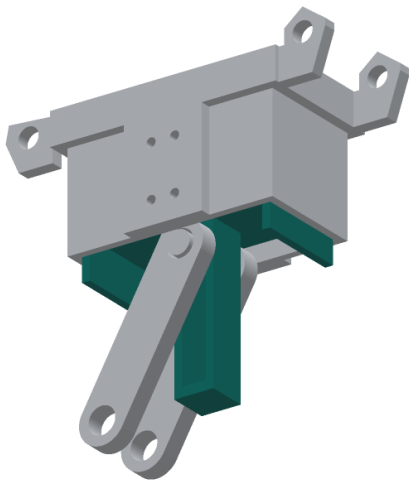

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Plate 25 mm, 288 x 138; corners broken 1 mm.

End skirts: two 12 mm plates 138 x 60, welded under the plate ends, flush with them. They keep the piston square in the mold.

Push rod: 60 x 60 bar, 238 long, welded square under the plate centre with a fillet all round.

Slot through the rod, side to side: 37 wide, 200 long; its top 23 below the plate, its bottom 15 above the rod's foot.

Chain drill and file, or mill; deburr.

Foot: the rod's bottom face, square and flat; the eject arm's nose pushes here. Face harden or fit a 6 mm wear pad if wanted.

Fit: 1 mm clearance each side in the mold; the upper pin sits in the slot, the upper links either side of the rod (2 mm).

Check: drops through the mold cavity under its own weight.

EARTHPRESS

github.com/BoujeeEnjinia1701/earthpress

EarthPress piston, end skirts and push rod: making sketch

DRAWING NO. EPR-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Mild steel plate 25 and 12 mm; 60 x 60 bright bar					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	