



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the TRL 3 model (EPR-CAL-001)	2026-09-25	AC

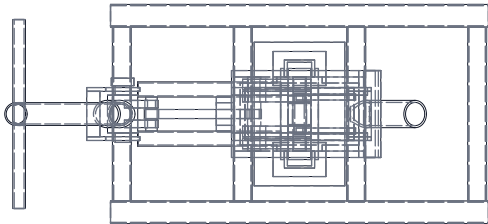


TOP VIEW
Scale 1:20

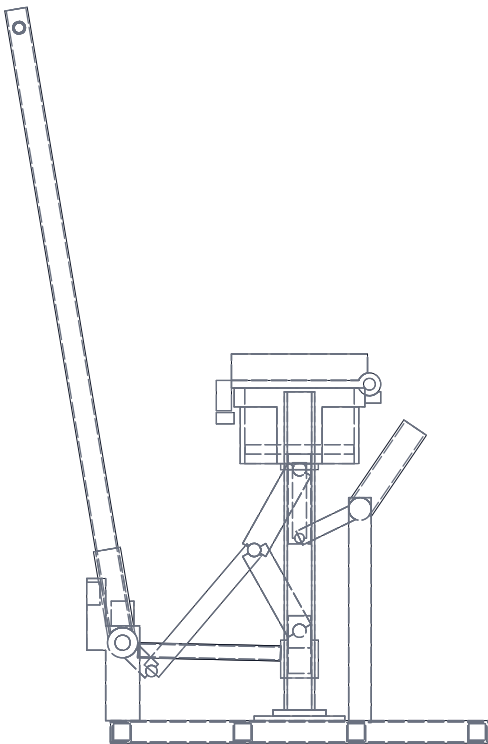

FRONT VIEW
Scale 1:20

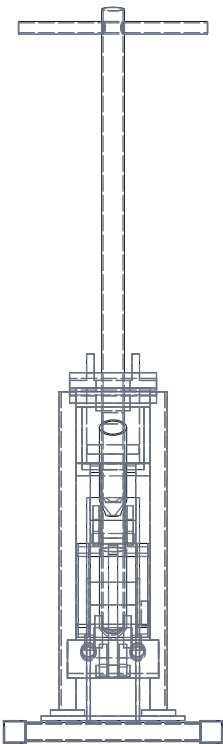

RIGHT VIEW
Scale 1:20

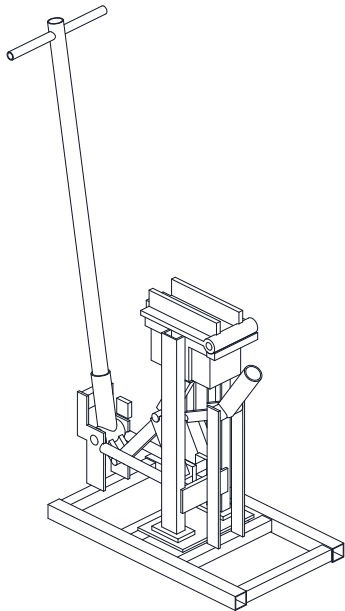

ISOMETRIC VIEW
Not to scale

KEY DIMENSIONS AND INTERFACES (MM)

Shown at start of stroke, lid closed, lever up
Cavity 290 x 140, rim at 940; fill 150, block 90
Mold wall 12, belt 16 x 50; 8 x M16 8.8 to UPN 80
Lid 20 plate + 2 ribs 20 x 70; pins 30
Toggle links 245 c/c, 28 x 70; pins 35 C45
Base pin at 298; stop at 6 deg from vertical
Lever pivot (-468, 266); crank 107; link 420
Lever 2 in sch 40, grip radius 1650; arc 59 deg
Eject seesaw at (160, 620), arm 160, lift 160
Ratio 173:1 at the stop; 81 kN at 2 MPa
Design load 173 kN (1,000 N at the grip)
Mass about 187 kg in 8 pieces (EPR-CAL-001)
PRELIMINARY, NOT FOR FABRICATION

EARTHPRESS

General arrangement, manual CSEB press

DRAWING NO. EPR-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Mild steel plate, UPN 80, tube and 2 in pipe; C45 pins. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com				Generated from cad/src; do not edit by hand	