



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:2; looking down (along -Z)

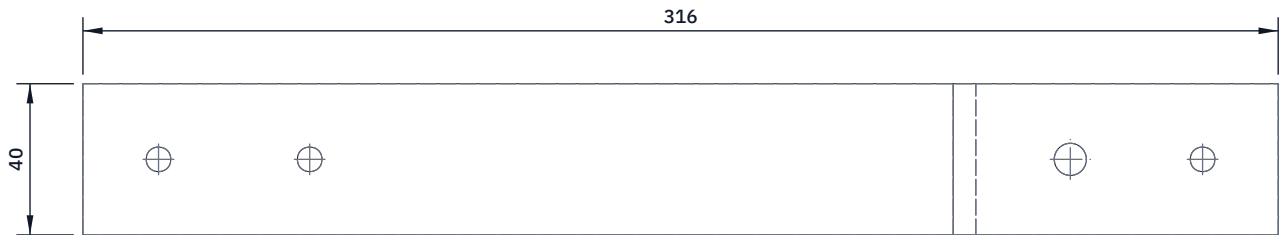

FRONT VIEW
Scale 1:2; looking at the front (along +Y)

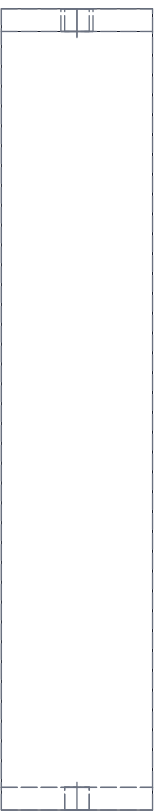

RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

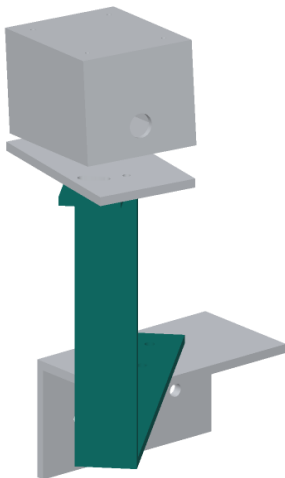

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 540 mm of 40 x 6 mm flat bar; it is trimmed after bending.

Bend 1: up 90 degrees, its outside face 236 mm from the start end.

Bend 2: forward 90 degrees, so the top of the tab is 212 mm above the underside of the run. Bend cold in a vice round a 12 mm former; trim the tab to 80 mm beyond the rise's outside face.

Run: two 6.5 mm holes on the centre line, 20 and 60 mm from the start.

Tab: an 8.5 mm pivot hole 25 mm, and a 6.5 mm hole 60 mm, beyond the rise's outside face.

Mark the holes after bending; the drawing gives finished positions.

Fit: the run lies flat on the cleat (two M6 bolts); the pod plate lies flat on the tab (M8 pivot bolt and an M6 bolt in the slot).

Check: the tab is level when the run is level, within 1 degree.

EMBERGUARD				github.com/BoujeeEnjinia1701/emberguard			
EmberGuard pod arm (make 2): making sketch							
DRAWING NO. EGD-DWG-109			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminium flat bar 40 x 6 mm, 6060 or 6063-T6							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand			