



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

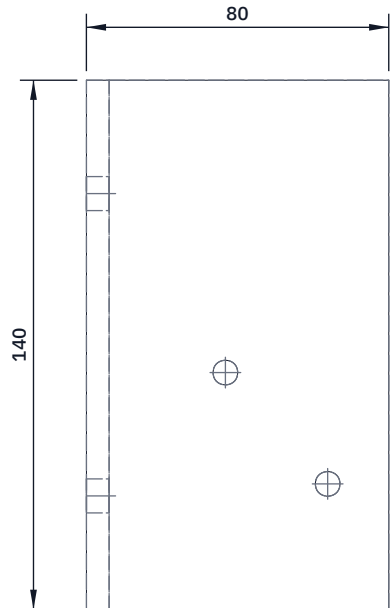


TOP VIEW

Scale 1:2; looking down (along -Z)

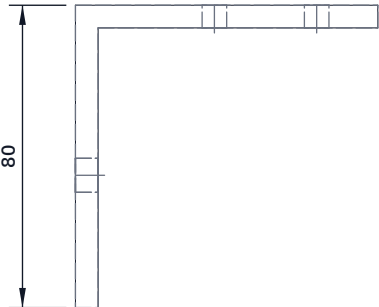


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

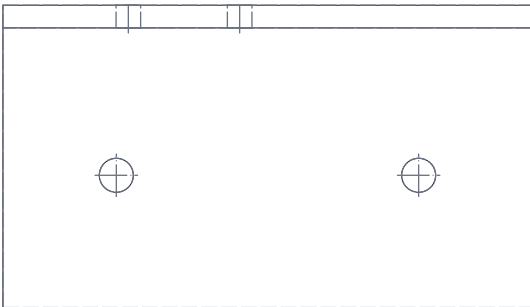

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

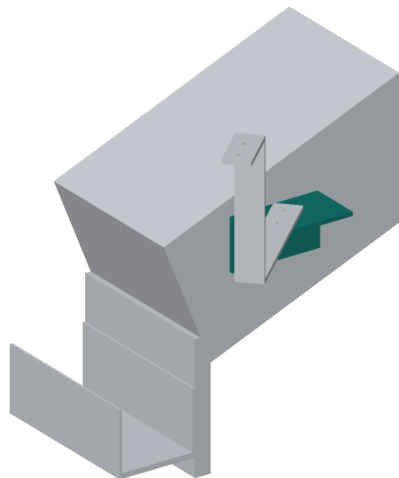

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 140 mm of 80 x 80 x 6 mm angle; square and deburr.

Upright leg (against the verge board): two 9 mm holes 45 mm down from the top face, 40 mm each side of the middle, for 8 mm coach screws.

Flat leg (sticks out east, level): two 6.5 mm holes on the arm's line, which runs at 47 degrees outward: 37 and 64 mm out from the face on the verge, 7 and 37 mm toward the gutter from the middle.

Easiest: drill them through the arm on assembly.

The two cleats are mirror images.

Fit: the upright leg on the end of the roof overhang (the verge or barge board), 30 to 170 mm in from the eave edge, top 232 mm above the gutter lip; the arm's run on top of the flat leg.

Check: the flat leg is level and the screws reach solid timber.

EMBERGUARD

github.com/BoujeeEnjinia1701/emberguard

EmberGuard verge cleat (make 2, a front and a back): making sketch

DRAWING NO. EGD-DWG-110			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium equal angle 80 x 80 x 6 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand