


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

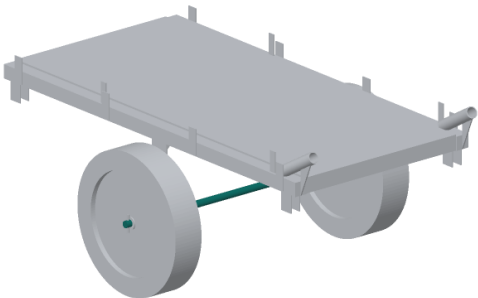

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 820 mm of 20 mm bright steel bar; chamfer both ends 1 mm.

Drill a 5 mm cross hole 10 mm from each end for the linch pins, both holes in the same plane.

Slide it through both bracket holes so 410 mm stands each side of the centre line; weld it to both brackets, all round, both faces.

Each end then takes, in order: a spacer collar 26 mm outside, 20 mm bore, 37.5 mm long; the wheel hub (60 mm long); a 20 mm washer 3 mm thick; the linch pin.

Check: the wheels spin freely with 0.5 to 1 mm end float.



TOP VIEW

Scale 1:5; looking down (along -Z)



FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

FIELDCELL

github.com/BoujeeEnjinia1701/fieldcell

FieldCell axle: making sketch

DRAWING NO. FCL-DWG-102			REV P1		SHEET 1 of 1		SIZE ANSI B	
SCALE 1:5		UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES Bright mild steel bar 20 mm diameter								
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com								
Generated from cad/src; do not edit by hand								