



CONCEPT, NOT FOR FABRICATION


| REV | DESCRIPTION   | DATE       | BY |
|-----|---------------|------------|----|
| P1  | Concept sheet | 2026-09-25 | AC |




TOP VIEW  
Scale 1:10

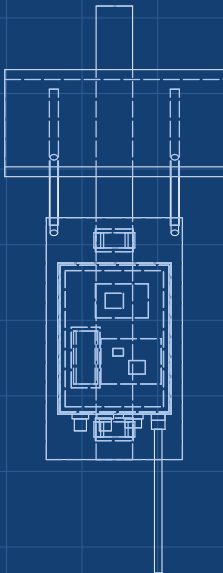

FRONT VIEW  
Scale 1:10

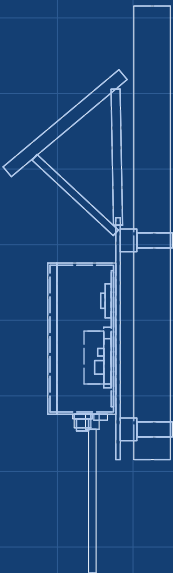

RIGHT VIEW  
Scale 1:10

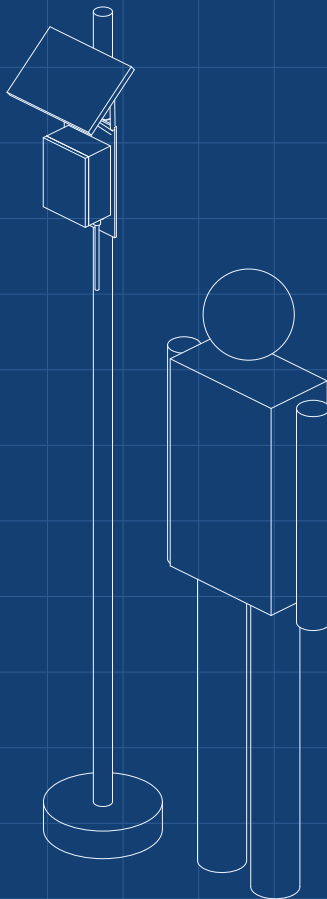

ISOMETRIC VIEW  
Not to scale; grey is for scale

KEY FIGURES

Enclosure 150 x 90 x 200 mm, IP65 class; 6 W panel above as sun and rain hood  
LiFePO4 cell 3.2 V, 6 Ah, about 19 Wh; charging blocked below 0 °C  
About 5 days autonomy at full sensor load, no sun (estimate)  
Sensor allowance about 115 mW average, 2.75 Wh/day (estimate)  
LoRaWAN uplink every 15 min; parts about \$126 (indicative)

FIELDNODE

Pole-mounted solar sensor node concept

|                            |             |                                                                                                     |                    |                       |                |
|----------------------------|-------------|-----------------------------------------------------------------------------------------------------|--------------------|-----------------------|----------------|
| DRAWING NO.<br>FND-DWG-010 |             |                                                                                                     | REV<br>P1          | SHEET<br>1 of 1       | SIZE<br>ANSI B |
| SCALE<br>1:10              | UNITS<br>mm | PROJECTION<br> | DATE<br>2026-09-25 | DRAWN<br>Amish Chadha |                |

MATERIAL / NOTES  
Massing model for concept communication