



CONCEPT, NOT FOR FABRICATION

FlatTrike · github.com/BoujeeEnjinia1701/flattrike

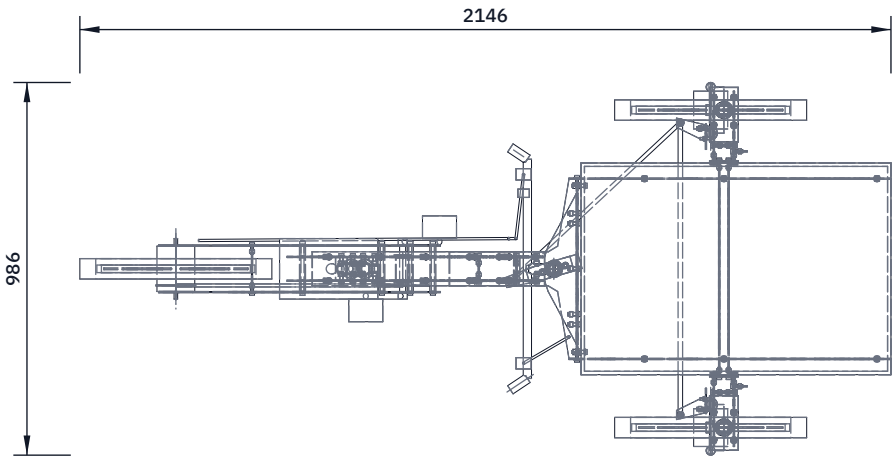


TOP VIEW

Scale 1:20; looking down (along -Z)

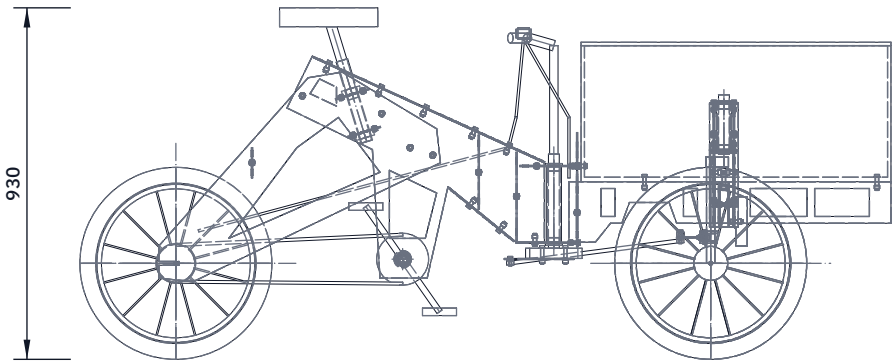

FRONT VIEW


Scale 1:20; looking at the front (along +Y)

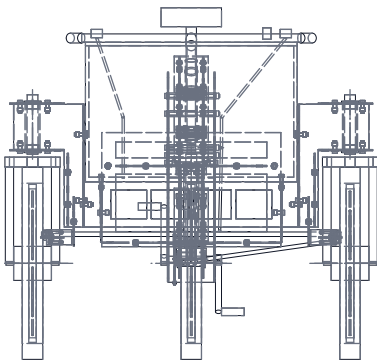

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the TRL 3 model (FTK-CAL-001)	2026-09-25	AC
P2	Ackermann steering, fixed bed, 200 mm head tube, box raised (FTK-DDR-002)	2026-09-25	AC
P3	Design for construction, buildable as drawn (FTK-DDR-003)	2026-10-01	AC
P4	Steering lock stop at each knuckle post; rating 148 and 138 kg (FTK-DEC-001)	2026-10-02	AC
P5	Knuckle forks turned to trail (35 mm trail); rail tyre notch (FTK-DEC-001)	2026-10-03	AC

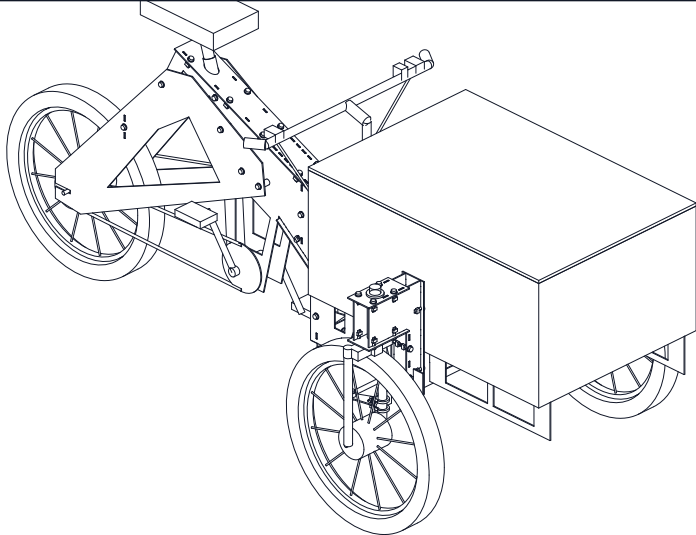

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

KEY DIMENSIONS (MM) AND DATA

Overall 2146 L x 986 W x 930 H (saddle top)
Wheelbase 1415 (kingpins 1450); track 840; wheels 20 in (ISO 406)
Steering column 1000 ahead of rear axle; head tube 200 long
Bottom bracket 600 ahead, 265 high; seat angle 73 deg
Saddle top 930 high, 404 ahead of rear axle
Spine box 66 wide x 150 to 210 deep; stays 120 apart (hub OLD)
Chain line 44 right; 32T / 24T; cranks 170
Box 820 x 560 x 360; lid 839 high
37 plates, 1.31 m2 net, t = 3; one 1250 x 2500 sheet
Ackermann steering, fixed box; turning circle 5.52 m
Inner lock 40 deg at a lock stop under each knuckle post (FTK-DWG-124)
Joints: tabs in slots, M8 8.8 bolts into T-slots with all-metal locknuts
Knuckle head tubes 120 long, vertical; forks turned to trail
Fork offset 35 trailing: mechanical trail 35, caster 0 deg
Empty 71.6 kg; gross 299.6 kg with 80 kg rider, 148 kg cargo (FTK-CAL-001 v0.7)
Frame not verified: R2 at risk; see FTK-CAL-001
PRELIMINARY, NOT FOR FABRICATION

FLATTRIKE

github.com/BoujeeEnjinia1701/flattrike

General arrangement, TRL 3 model

DRAWING NO. FTK-DWG-001			REV P5	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 3 mm S235JR or A36 plate, painted; M8 8.8 bolts, all-metal locknuts. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand