


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Tyre notch in the lower edge; forks turned to trail (FTK-DEC-001)	2026-10-03	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

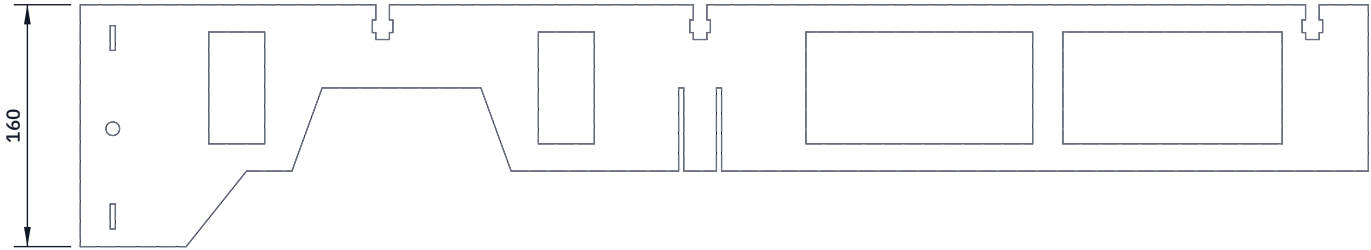


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

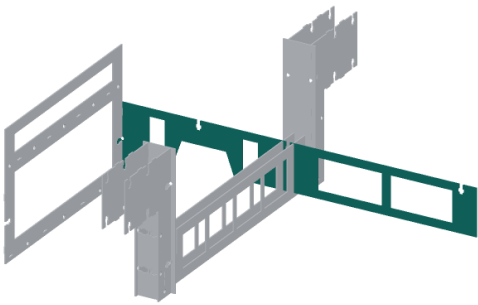

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make 2; the right rail is the left rail turned over.
Strip 852 mm long, 160 mm deep at the back, 110 mm deep from 1150 mm ahead of the rear axle; four lightening windows.
Tyre notch 55 mm up into the lower edge, 1200 to 1305 mm ahead of the rear axle (55 mm of plate left): the trailing tyre passes under it.
Two halving slots 3.4 mm wide from the bottom edge up to 55 mm deep, 25 mm apart, for the axle beam plates.
Three T-slots in the top edge for the box bolts; a pair of slots and a 9 mm hole near the back for the bulkhead.
T-slot: 9 mm wide, 23 deep, with a 13.6 x 8.4 mm window 10 mm in for the nut.
Fit: the rails run along the bed 474 mm apart (inside faces).
Check: the halving slots are square to the top edge.

FLATTRIKE

github.com/BoujeeEnjinia1701/flattrike

FlatTrike bed rail (make 2, left and right): making sketch

DRAWING NO. FTK-DWG-112			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 3 mm S235JR or A36 steel plate, laser or waterjet cut					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand