
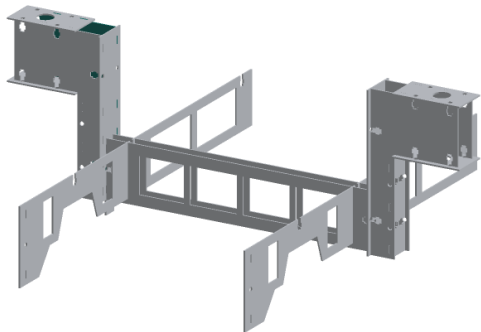
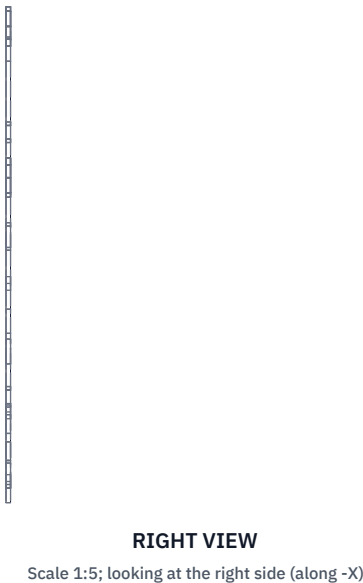
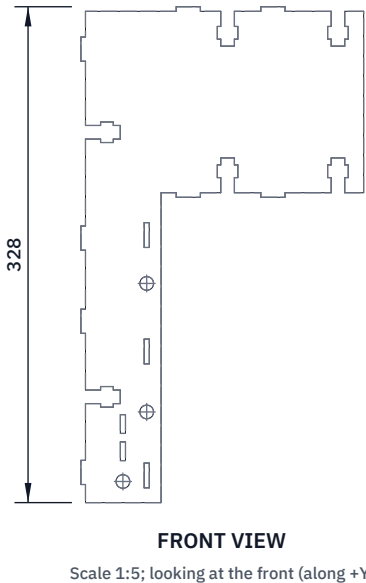


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Steering lock stop added (decided 2026-10-02, FTK-DEC-001)	2026-10-02	AC
P3	Lower lip trimmed to 8 mm; forks turned to trail (FTK-DEC-001)	2026-10-03	AC

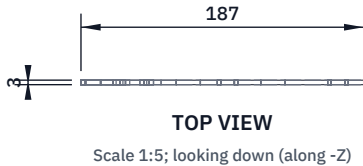

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make 4 from one file; turn two over for the right-hand post.

Front plates (one per post): also cut the lock stop's two slots and 9 mm hole low on the column (shown); harmless on the rear plates.

L-shaped plate: a 50 mm wide column 325 mm tall, and an arm 134 mm wide and 120 mm deep at the top that reaches out over the wheel.

Inner edge: 4 tabs and 2 T-slots into the inner cheek.

Arm: 2 tabs and 2 T-slots on its bottom edge and on its top edge, into the knuckle collar plates.

Three slots and two 9 mm holes 9.5 mm in from the column's outer edge: the outer cheek's tabs and bolts.

T-slot: 9 mm wide, 23 deep, with a 13.6 x 8.4 mm window 10 mm in for the nut.

Fit: two plates stand 50 mm apart either side of the knuckle head tube; the lock stop (FTK-DWG-124) tabs into the front plate.

Check: all four plates match when stacked.

FLATTRIKE

github.com/BoujeeEnjinia1701/flattrike

FlatTrike knuckle post plate (make 4): making sketch

DRAWING NO. FTK-DWG-114			REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 3 mm S235JR or A36 steel plate, laser or waterjet cut					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand