



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

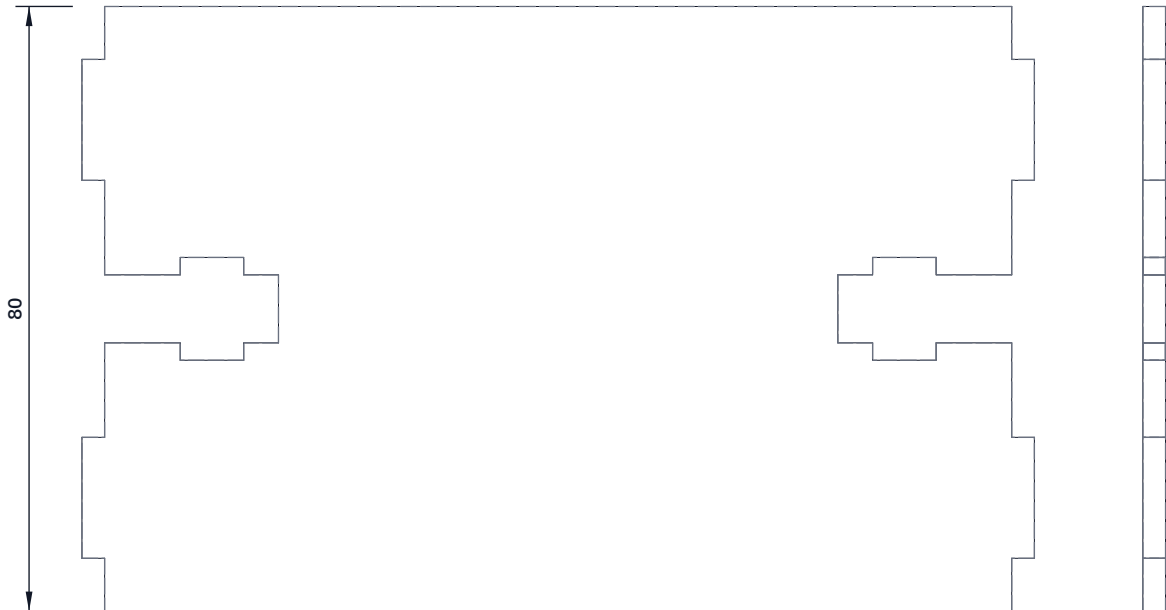


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

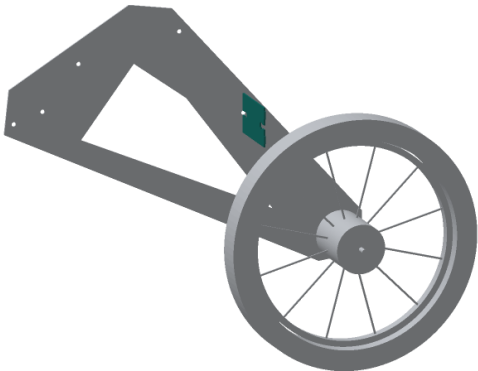

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Plate 120 x 80 mm plus a tab each side.
Each 80 mm edge: two tabs and a T-slot between them.
T-slot: 9 mm wide, 23 deep, with a 13.6 x 8.4 mm window 10 mm in for the nut.
Fit: across the stays 200 mm ahead of the rear axle, 480 to 560 mm up;
it braces the stays' upper strips against buckling (FTK-CAL-001).
Check: the stays stand parallel, 120 mm apart, with the bridge fitted.

FLATTRIKE

github.com/BoujeeEnjinia1701/flattrike

FlatTrike stay bridge: making sketch

DRAWING NO. FTK-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES 3 mm S235JR or A36 steel plate, laser or waterjet cut					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	