
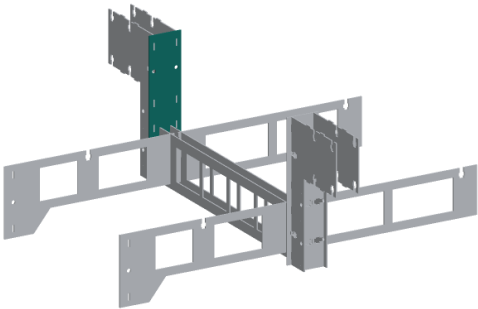


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make 2; turn one over for the right-hand post. Plate 76 x 325 mm.


Two rows of slots 53 mm apart: the knuckle post plates' tabs.

Two rows of slots 25 mm apart near the bottom: the axle beam tabs.

Bolt holes 9 mm between the slots (12 slots, 6 bolt holes 9 mm).

Fit: the cheek faces the box, 3 mm from its side; the bolt heads above the box floor sit in counterbores in the box sides.

Check: the slots for the beams line up with the beams' end tabs.

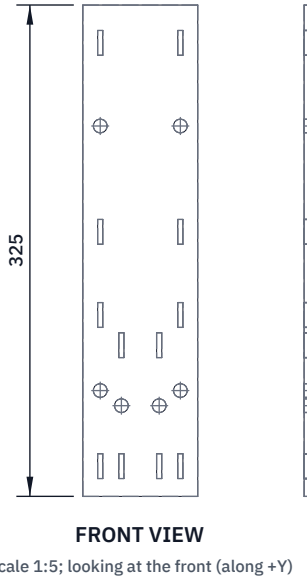

FLATTRIKE		github.com/BoujeeEnjinia1701/flattrike		
FlatTrike knuckle post inner cheek (make 2): making sketch				
DRAWING NO. FTK-DWG-115		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES 3 mm S235JR or A36 steel plate, laser or waterjet cut				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	