
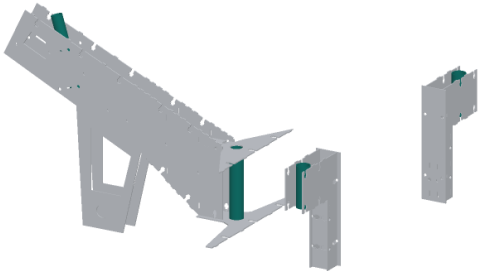



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

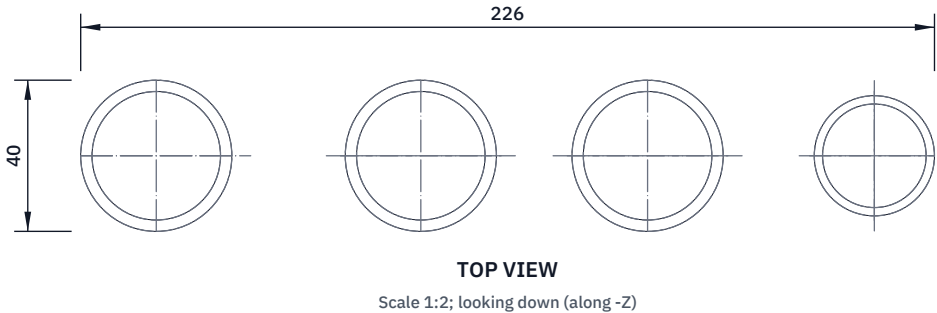

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Central head tube: one 200.0 mm length (left in the sketch).
Knuckle head tubes: two 120.0 mm lengths (middle).
Seat tube: one 225 mm length of 31.8 x 2.3 mm tube (right); a 27.2 mm seatpost must slide in it.
Saw square, then face both ends of each head tube square to the tube axis (a head tube facing tool, or a lathe): the cups' flanges clamp the yokes and collar plates against these ends.
Head tube bore 34.0 mm for press-in 1 1/8 in threaded headset cups.
Check: lengths 200.0 and 120.0 mm, give or take 0.2 mm.

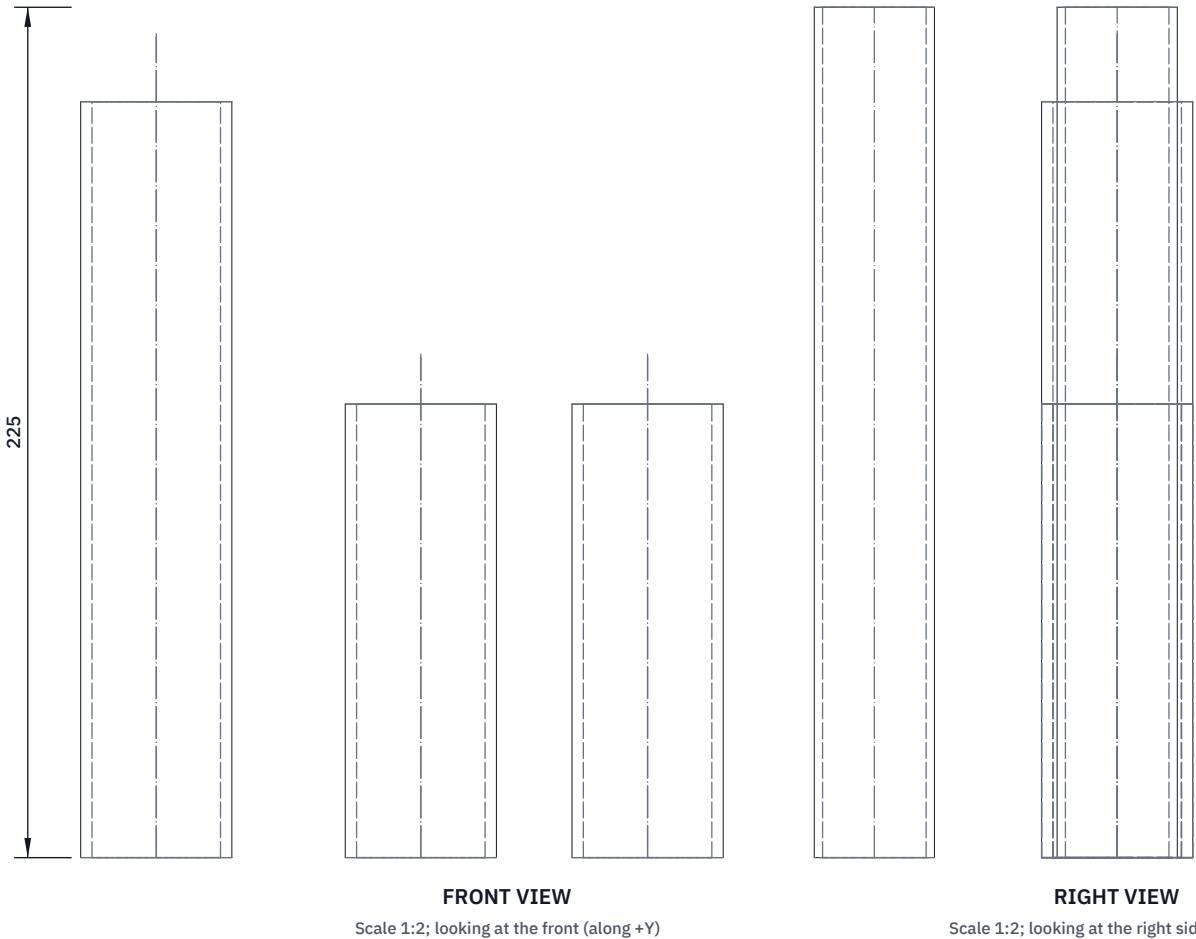

FLATTRIKE

github.com/BoujeeEnjinia1701/flattrike

FlatTrike head tubes and seat tube: cutting to length

DRAWING NO. FTK-DWG-122			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Bought steel tube: 40 mm head tube section; 31.8 x 2.3 mm seat tube					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	