


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

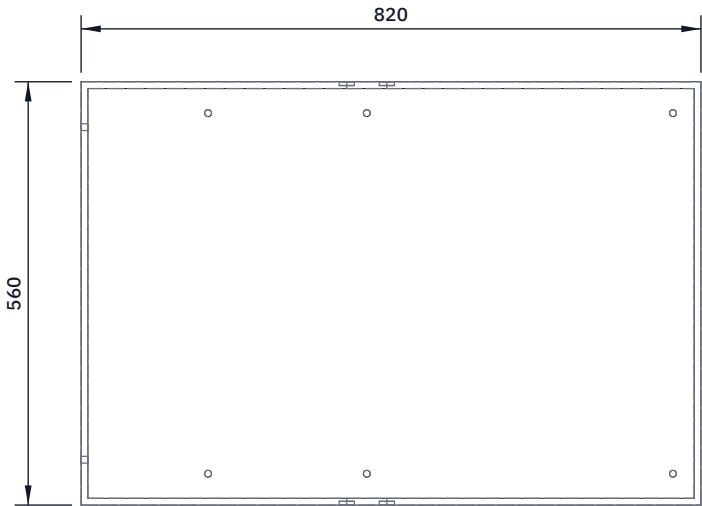


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

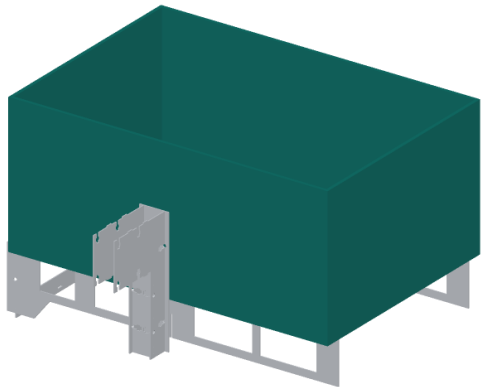

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Box 820 x 560 x 360 mm outside; floor 12 mm, walls and lid 9 mm.

Floor: six 9 mm holes, 238.5 mm each side of the centre line, at 168, 378 and 783 mm from the back face: bolts down into the rails.

Back: two 9 mm holes 220 mm each side of the centre line, 42 mm above the floor's underside: bolts to the bulkhead.

Each side: two 20 mm counterbores 5 mm deep, 125 mm above the floor's underside, 352 and 405 mm from the back face: room for the knuckle post bolt heads.

Seal every hole and edge before painting.

Check: drill the floor holes through the rails' T-slots with the box in place, so they line up.

FLATTRIKE

github.com/BoujeeEnjinia1701/flattrike

FlatTrike cargo box: drilling for the bed bolts

DRAWING NO. FTK-DWG-123			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Exterior plywood, 12 mm floor, 9 mm walls and lid (by a carpenter)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand