



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the TRL 3 model (FTK-CAL-001)	2026-09-25	AC

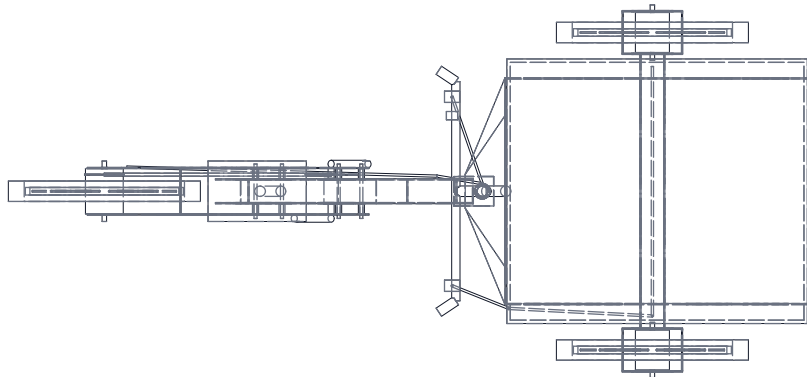


TOP VIEW
Scale 1:20

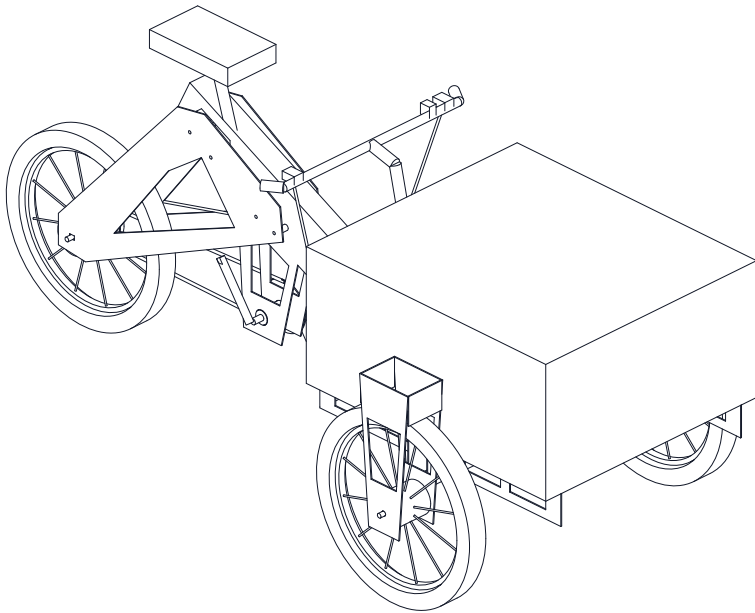

ISOMETRIC VIEW
Not to scale

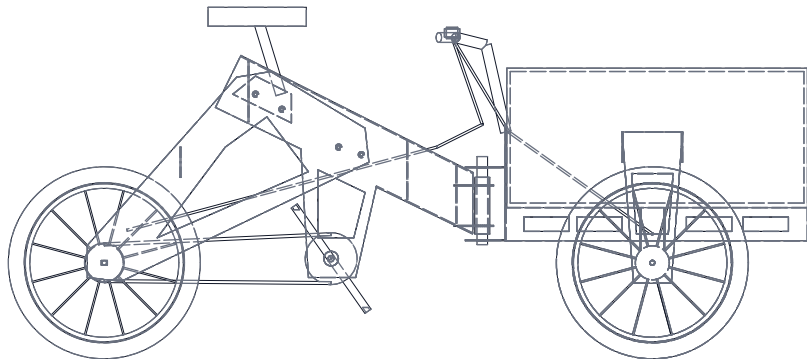

FRONT VIEW
Scale 1:20

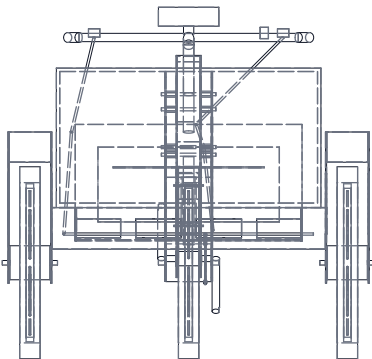

RIGHT VIEW
Scale 1:20

KEY DIMENSIONS (MM) AND DATA

Overall 2114 L x 986 W x 930 H (saddle top)
Wheelbase 1450; front track 840; wheels 20 in (ISO 406)
Kingpin 1000 ahead of rear axle; head tube 150 long
Bottom bracket 600 ahead, 265 high; seat angle 73 deg
Saddle top 930 high, 404 ahead of rear axle
Spine box 63 wide x 150 deep; stays 120 apart (hub OLD)
Chain line 44; 32T / 24T; cranks 170
Box 795 x 700 x 360; lid 769 high
27 plates, 1.22 m2 net, t = 3; one 1250 x 2500 sheet
Box steering, 35 deg lock; turning circle 5.67 m
Empty 67.5 kg; gross 297.5 kg (FTK-CAL-001)
Frame not verified: R2 at risk; see FTK-CAL-001
PRELIMINARY, NOT FOR FABRICATION

FLATTRIKE

General arrangement, TRL 3 model

DRAWING NO. FTK-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES 3 mm S235JR or A36 plate, painted; M8 8.8 bolts, all-metal locknuts. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com				Generated from cad/src; do not edit by hand	