

Chapter 4-Fig4-1

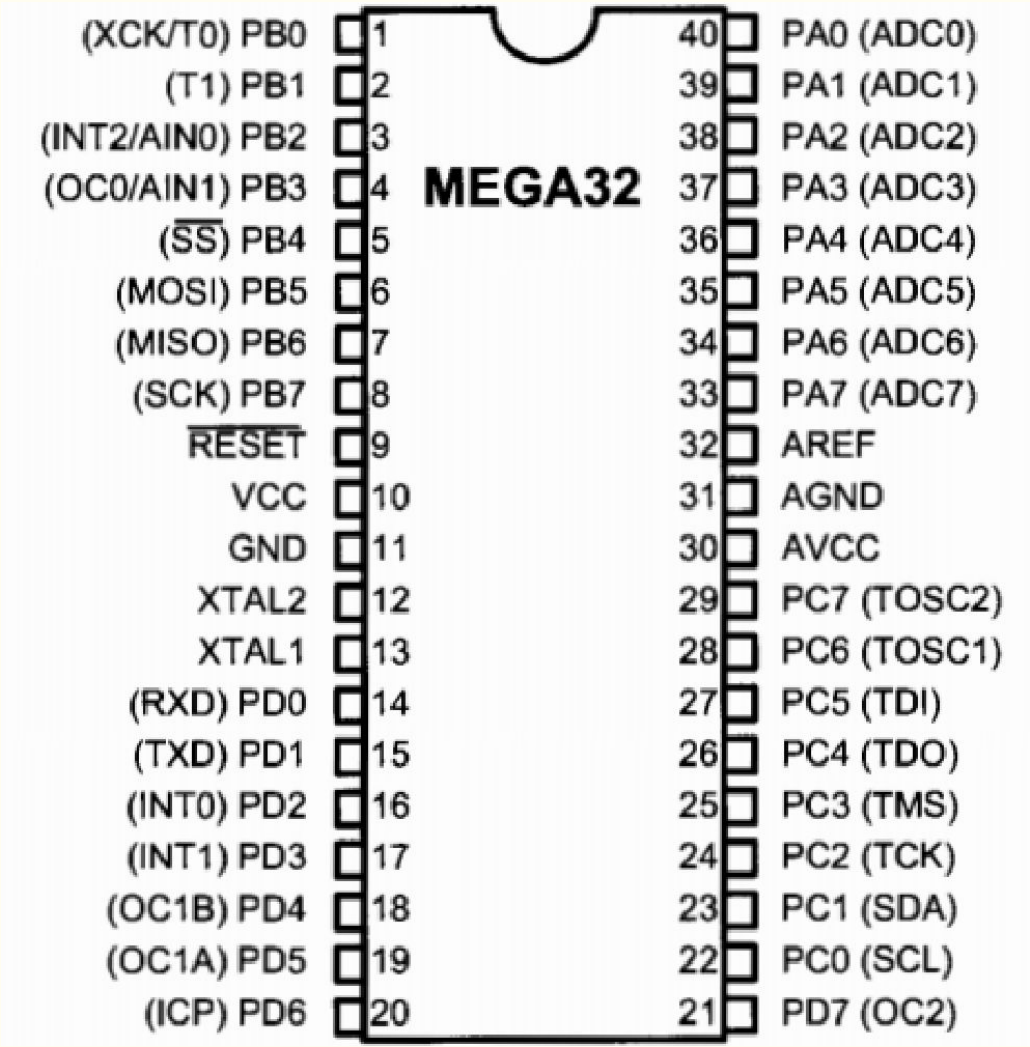

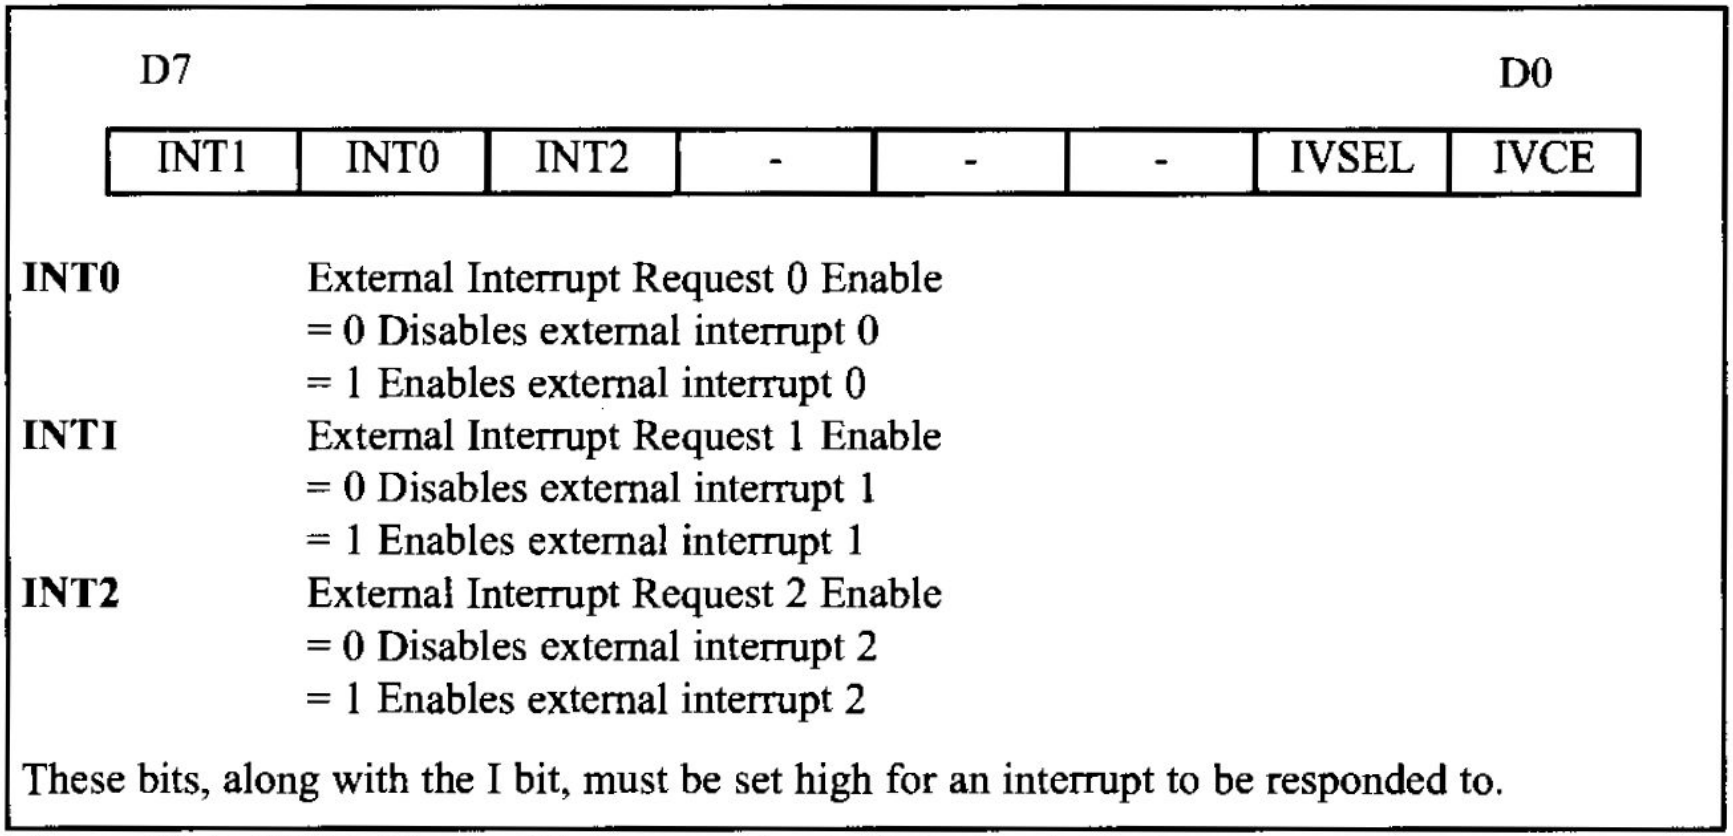

INT0 External Interrupt Request 0 Enable
= 0 Disables external interrupt 0
= 1 Enables external interrupt 0

INT1 External Interrupt Request 1 Enable
= 0 Disables external interrupt 1
= 1 Enables external interrupt 1


INT2 External Interrupt Request 2 Enable
= 0 Disables external interrupt 2
= 1 Enables external interrupt 2

These bits, along with the I bit, must be set high for an interrupt to be responded to.

Figure 10-6. GICR (General Interrupt Control Register) Register

D7							D0
SE	SM2	SM1	SM0	ISC11	ISC10	ISC01	ISC00


ISC01, ISC00 (Interrupt Sense Control bits) These bits define the level or edge on the external INT0 pin that activates the interrupt, as shown in the following table:

ISC01	ISC00		Description
0	0		The low level of INT0 generates an interrupt request.
0	1		Any logical change on INT0 generates an interrupt request.
1	0		The falling edge of INT0 generates an interrupt request.
1	1		The rising edge of INT0 generates an interrupt request.

ISC11, ISC10 These bits define the level or edge that activates the INT1 pin.

ISC11	ISC10		Description
0	0		The low level of INT1 generates an interrupt request.
0	1		Any logical change on INT1 generates an interrupt request.
1	0		The falling edge of INT1 generates an interrupt request.
1	1		The rising edge of INT1 generates an interrupt request.

Figure 10-7. MCUCR (MCU Control Register) Register

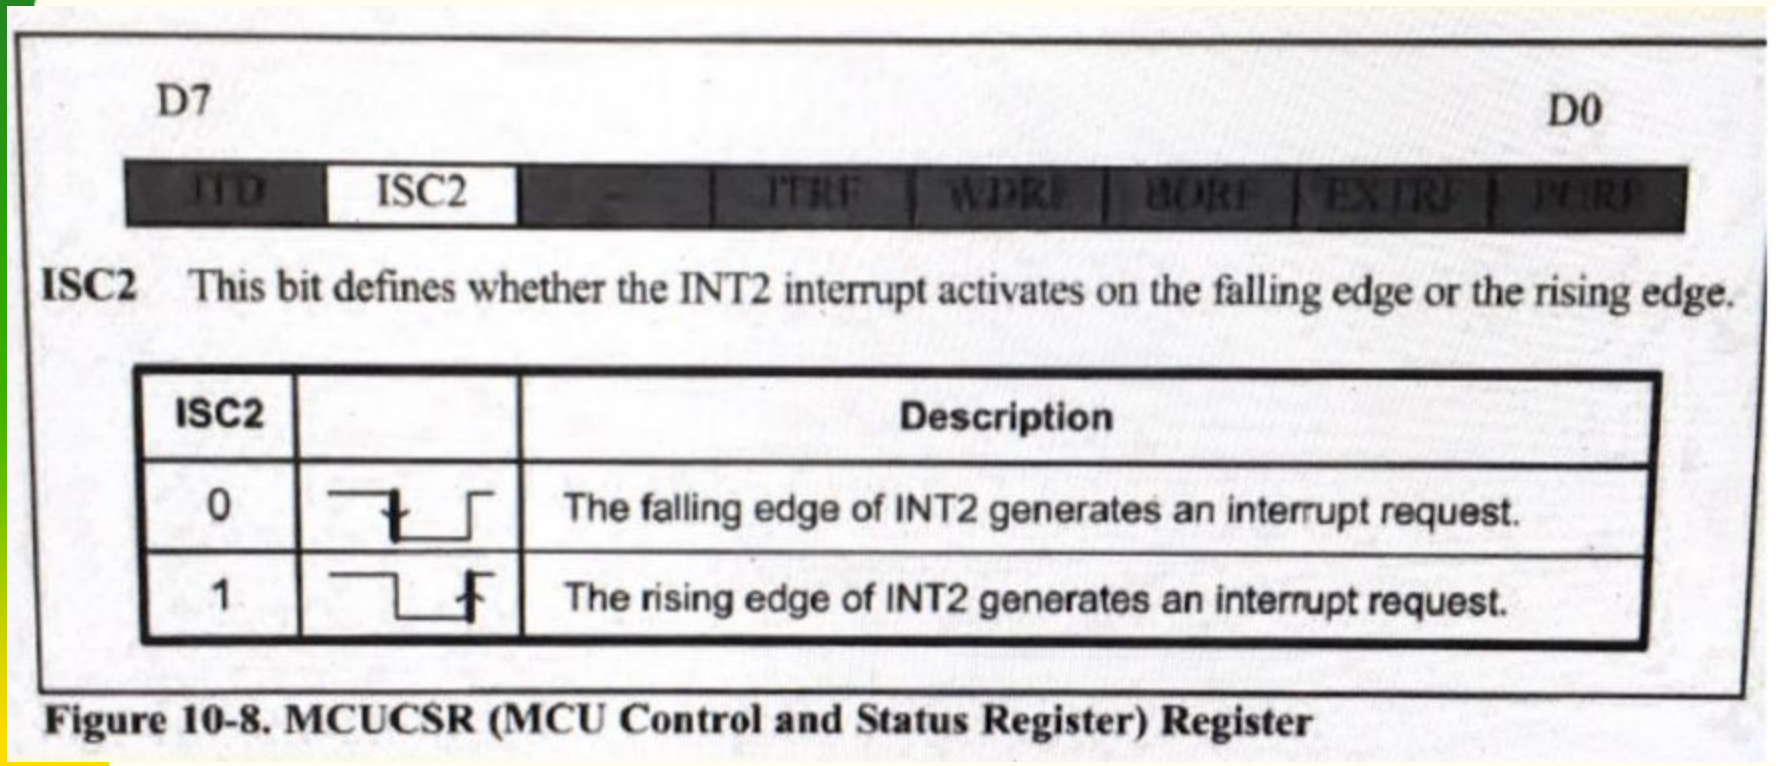

ISC2 This bit defines whether the INT2 interrupt activates on the falling edge or the rising edge.

ISC2		Description
0		The falling edge of INT2 generates an interrupt request.
1		The rising edge of INT2 generates an interrupt request.

Figure 10-8. MCUCSR (MCU Control and Status Register) Register

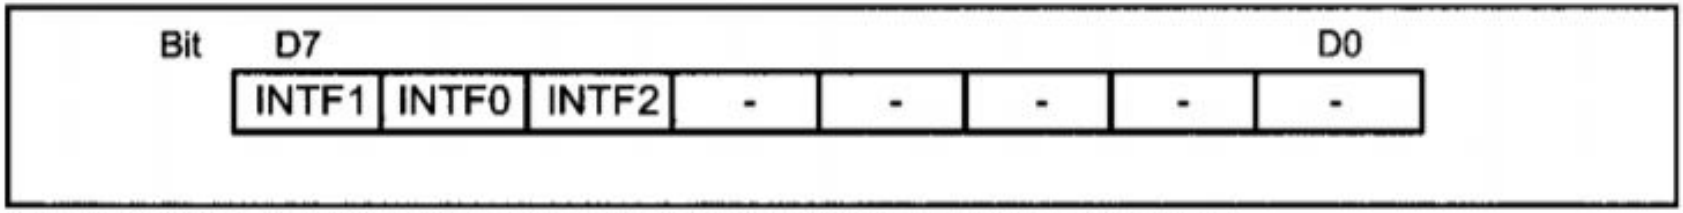


Figure 10-9. GIFR (General Interrupt Flag Register) Register