




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

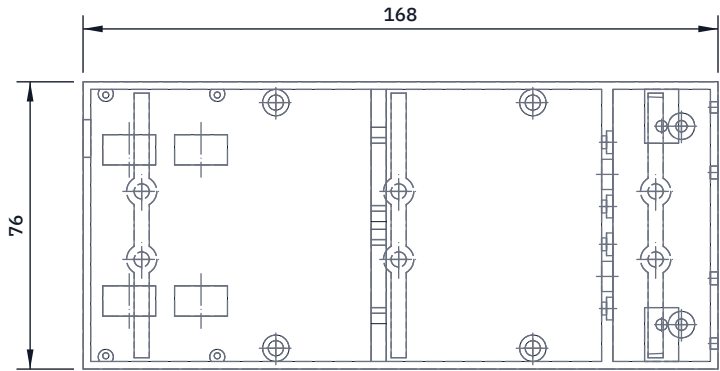


TOP VIEW
Scale 1:2; looking down (along -Z)

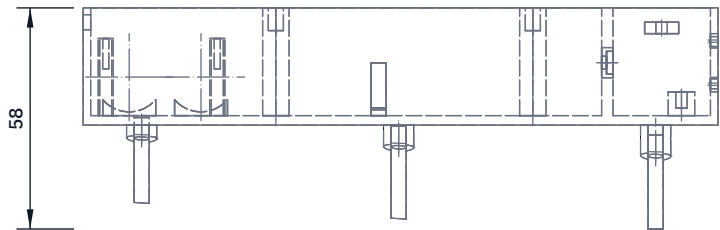

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

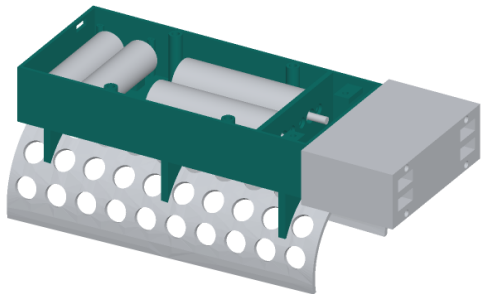

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print open side up, 168 x 76 mm, 2 mm walls, 2.5 mm floor; supports only under the three saddle ribs, which follow the cuff's curve.

Inside, from the elbow end: two cell saddles, four tray posts, the stop button well, the motor cradle, the 3 mm motor bulkhead, the idler posts and shelves, then the front wall with eight exit and screw holes.

Bulkhead: 8 mm shaft holes 13.5 mm each side of centre, 14 mm above the floor; 3.4 mm holes 8.5 mm either side of each, countersunk at the front.

Push in heat-set inserts (M3, 5 mm): six in the rib bosses from below, four in the lid bosses from above.

Fits: ribs sit on the cuff shell (six M3 screws); front wall carries the anchor block (four M3 screws from inside); lid on the wall tops.

Check: a motor slides into the cradle and its face sits flat on the bulkhead; a 3 mm pin drops into each idler post.

FLEXHAND				github.com/BoujeeEnjinia1701/flexhand			
FlexHand pack base: making sketch							
DRAWING NO. FXH-DWG-101			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES PETG, 3D printed, 4 perimeters, 30 % infill							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand			