



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

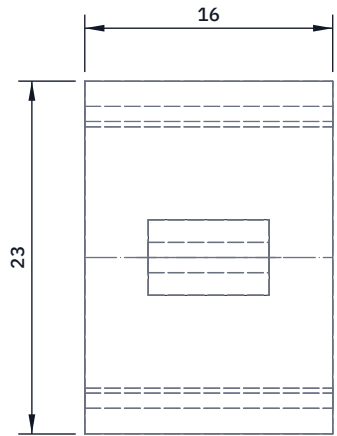


TOP VIEW

Scale 2:1; looking down (along -Z)

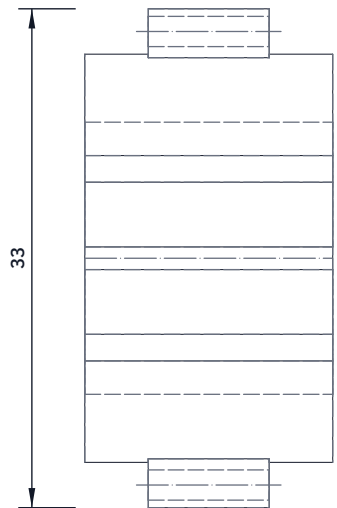


FRONT VIEW

Scale 2:1; looking at the front (along +Y)

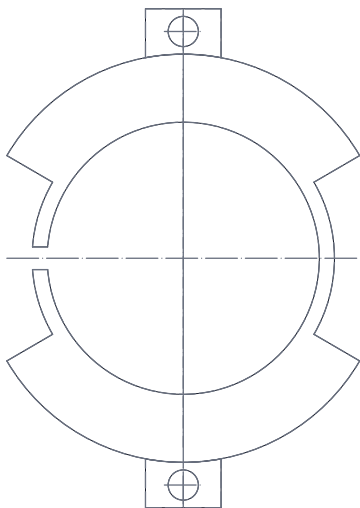

RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

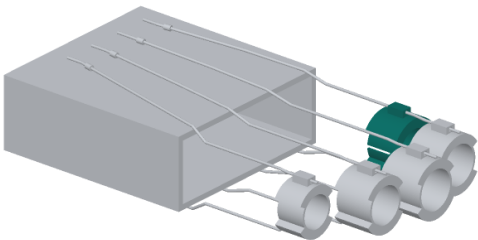

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn: the index anchor cuff. Guide cuffs (proximal phalanges) are 12 wide; anchor cuffs (middle phalanges) are index 16.4, middle 18.6, ring 17.0, little 12.2 wide. Bore = finger diameter (18, 18, 17, 15). Padded saddles top and bottom, 112 degrees each: 2.5 mm TPU over a 2 mm foam liner; 1 mm TPU side bands; a slit in one side band. Eyelet on top of every cuff and under every guide cuff: 2 mm hole. Under each anchor cuff a tab with a 2 mm hole ends the flexor tendon. Print on end, no supports; glue the liners into the saddles. Fits: closed round the phalanx with a 6 mm hook-and-loop strip over the slit, slit on the side away from the next finger where it can. Check: 3 mm clear of each joint crease; the finger bends fully.

FLEXHAND			github.com/BoujeeEnjinia1701/flexhand		
FlexHand finger cuffs (make 8): making sketch					
DRAWING NO. FXH-DWG-112			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha	
MATERIAL / NOTES TPU 95A, printed; 2 mm foam liner					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	