




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

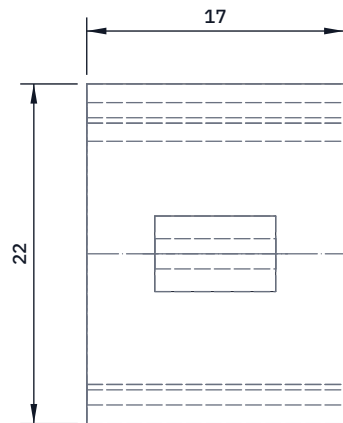


TOP VIEW
Scale 2:1; looking down (along -Z)

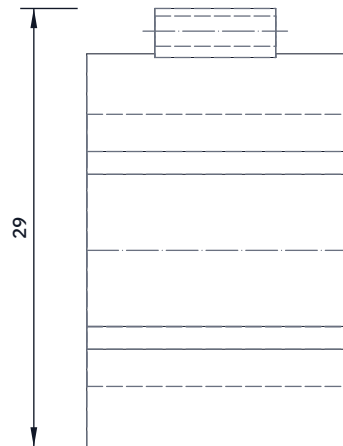

FRONT VIEW
Scale 2:1; looking at the front (along +Y)

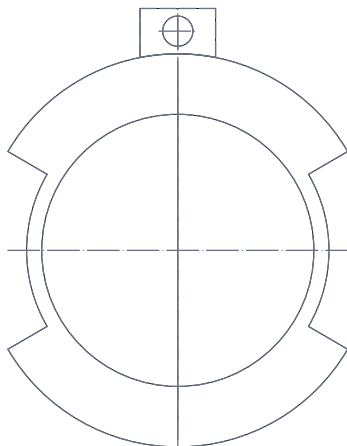

RIGHT VIEW
Scale 2:1; looking at the right side (along -X)

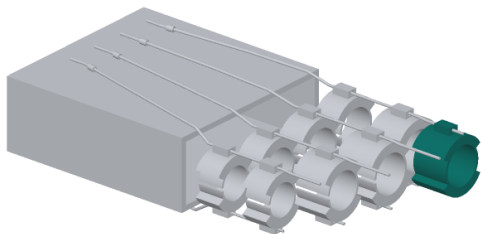

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn: the index thimble. Widths: index 17.0, middle 19.0, ring 17.5, little 13.2 mm; bore = fingertip diameter.

Open-tip band: padded saddles top and bottom (2 mm TPU over 2 mm foam), 1 mm side bands, no slit; it slides on over the fingertip.

Tab on top with a 2 mm hole where the extensor tendon ends.

Print on end, no supports; glue the liners into the saddles.

Fits: from 3 mm beyond the last finger crease to the tip.

Check: slides on and off; the nail and tip stay uncovered.

FLEXHAND

github.com/BoujeeEnjinia1701/flexhand

FlexHand fingertip thimbles (make 4): making sketch

DRAWING NO. FXH-DWG-113		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES TPU 95A, printed; 2 mm foam liner				