


d2s_lc2_nc: d2s_lc2 without the output cascodes, load-compensated (no Miller capacitor)

frozen .subckt defaults: lcas = 3 (CX, CY, PCL, PCR 30u / 3u ng=2), wdp = 6.66u, wdn = 3.8u; units are unit_r2 (rl = 50.6u)

block descriptions: README.md

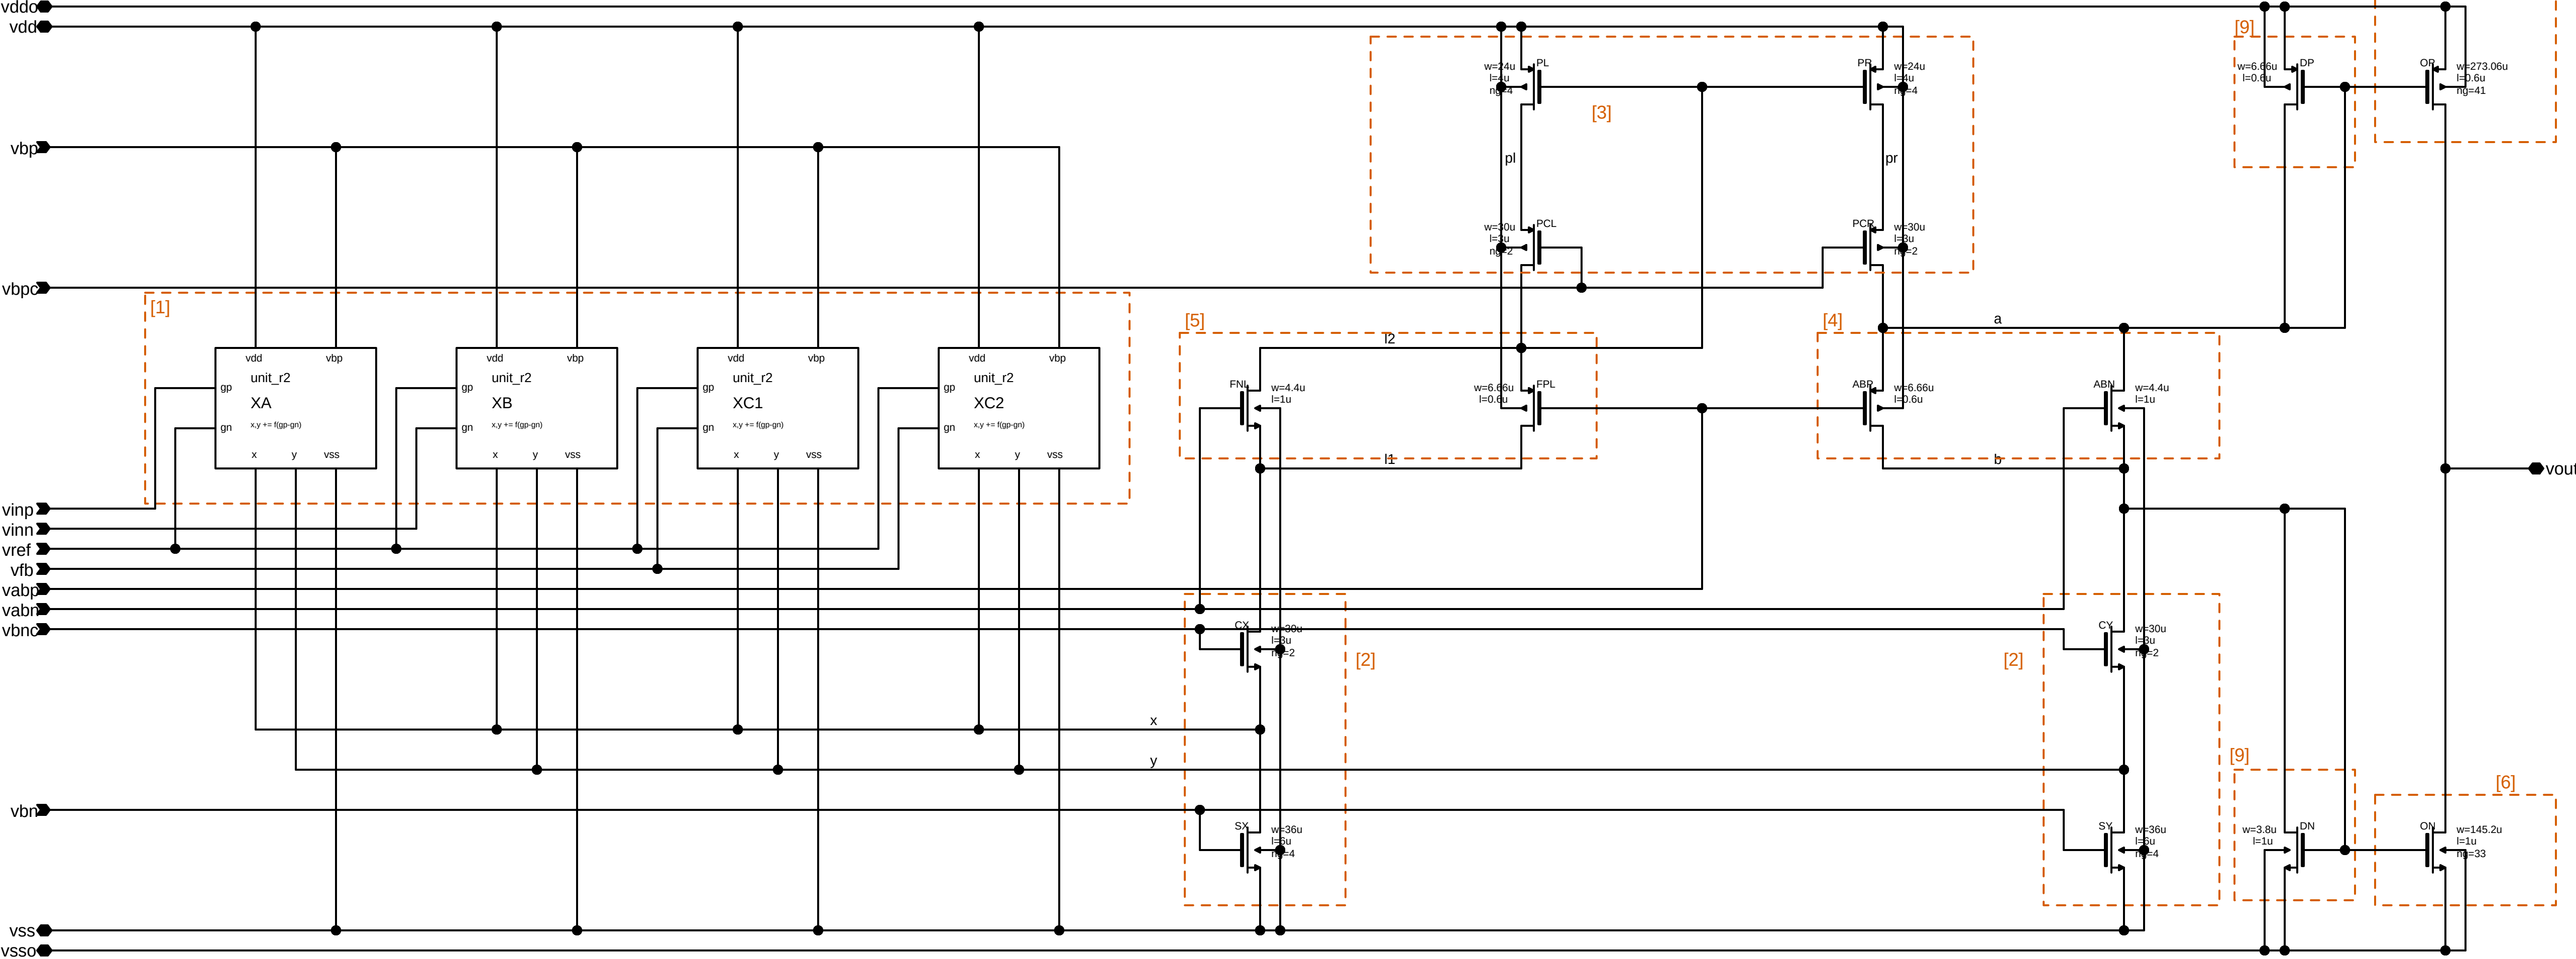

- [1] DDA units A, B, C1, C2: split-tail PMOS pair, rhigh between the sources. Each adds $f(gp - gn)$ to the fold nodes: the gp device drains to y, the gn device to x.
A: $v_{inp} - v_{ref}$, B: $v_{ref} - v_{inn}$, C1 = C2: $v_{ref} - v_{fb}$. The loop forces $f(v_{inp} - v_{ref}) + f(v_{ref} - v_{inn}) = 2 f(v_{fb} - v_{ref})$, so $v_{fb} - v_{ref} = (v_{inp} - v_{inn})/2$.
- [2] fold: sinks SX, SY (gate vbn) and NMOS cascodes CX, CY (gate vbnc). x and y are the fold nodes.
- [3] PMOS cascoded mirror: PL, PCL is the input side (gates tied to I2), PR, PCR the output side into node a. Cascode gates vbpc.
- [4] class-AB control: ABP (gate vabp) and ABN (gate vabn) between a and b. With RP1/RP2 and RN1/RN2 in the bias it sets the quiescent current of OP and ON.
- [5] FPL, FNL: copy of [4] in the mirror input branch (between I2 and I1), so both fold branches carry the same element.
- [6] output devices OP (gate a), ON (gate b): half frames, in the slot, not the pad clamps.
- [9] diode replicas DP (on a), DN (on b), 1/41 and 1/38 of OP, ON: low-impedance gate nodes. No compensation capacitor: the load capacitance is the dominant pole.