
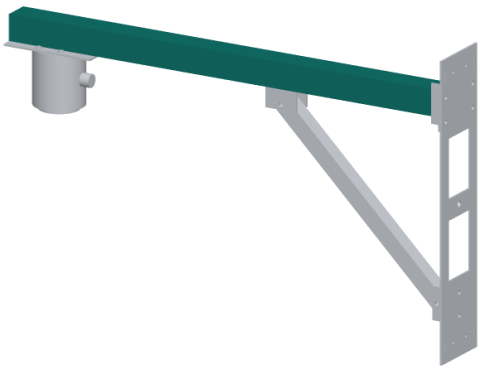


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

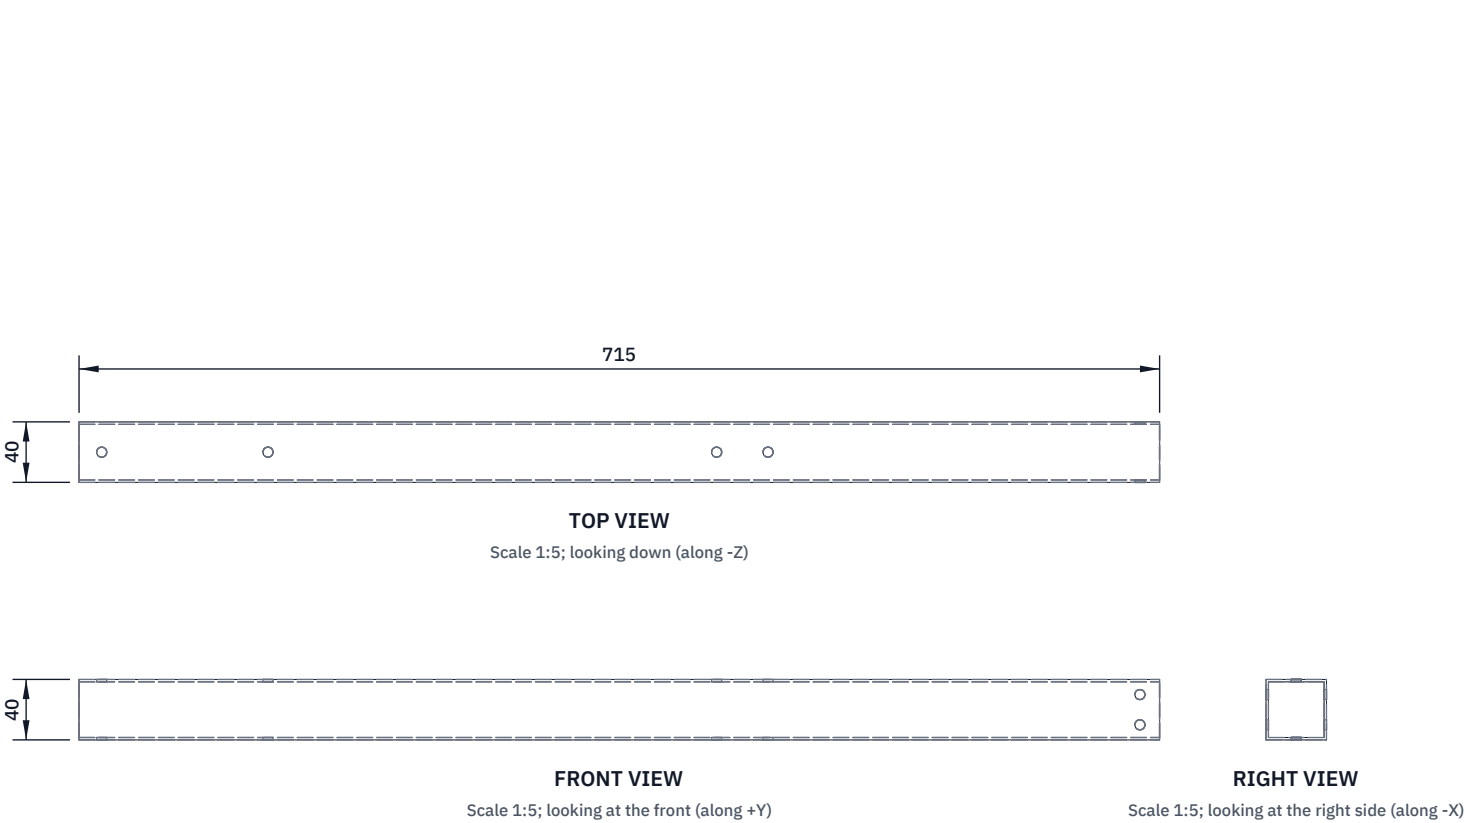

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 715 mm of 40 x 40 x 1.6 tube; square and deburr both ends.

Measure from the pole end (the end that goes between the cleats).

Cleat bolts: two 6.6 mm holes across the side faces, 13 mm from the pole end, 10 mm above and below the centre line. Drill through both sides.

Brace clip bolts: two 6.6 mm holes down through top and bottom, on the centre line, 259 and 293 mm from the pole end.

Head plate bolts: two 6.6 mm holes down through top and bottom, on the centre line, 590 and 700 mm from the pole end.

Use a drill stand so every hole goes square through both walls.

Fit a 6 mm aluminium crush sleeve inside at every bolt so the tube walls are not squeezed in; push a plastic cap into the road end.

The radar head axis is 700 mm from the pole axis.

Check: lay it on the bench; the hole rows line up along the centre.

FLOODGAUGE				github.com/BoujeeEnjinia1701/floodgauge			
FloodGauge sensor arm: making sketch							
DRAWING NO. FLG-DWG-105			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminium square tube 40 x 40 x 1.6 mm, 6063-T6							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com							
Generated from cad/src; do not edit by hand							