


d2s_bias_lp: bias for d2s_mpdda / d2s_lc2 (ideal reference currents, $i_{ab} = 5\mu$, $i_{bnc} = 2\mu$)

vabp, vabn: replicas of the class-AB pairs (FPL/ABP 6.66 μ /0.6 μ , FNL/ABN 4.4 μ /1 μ), stacked on a 2x diode

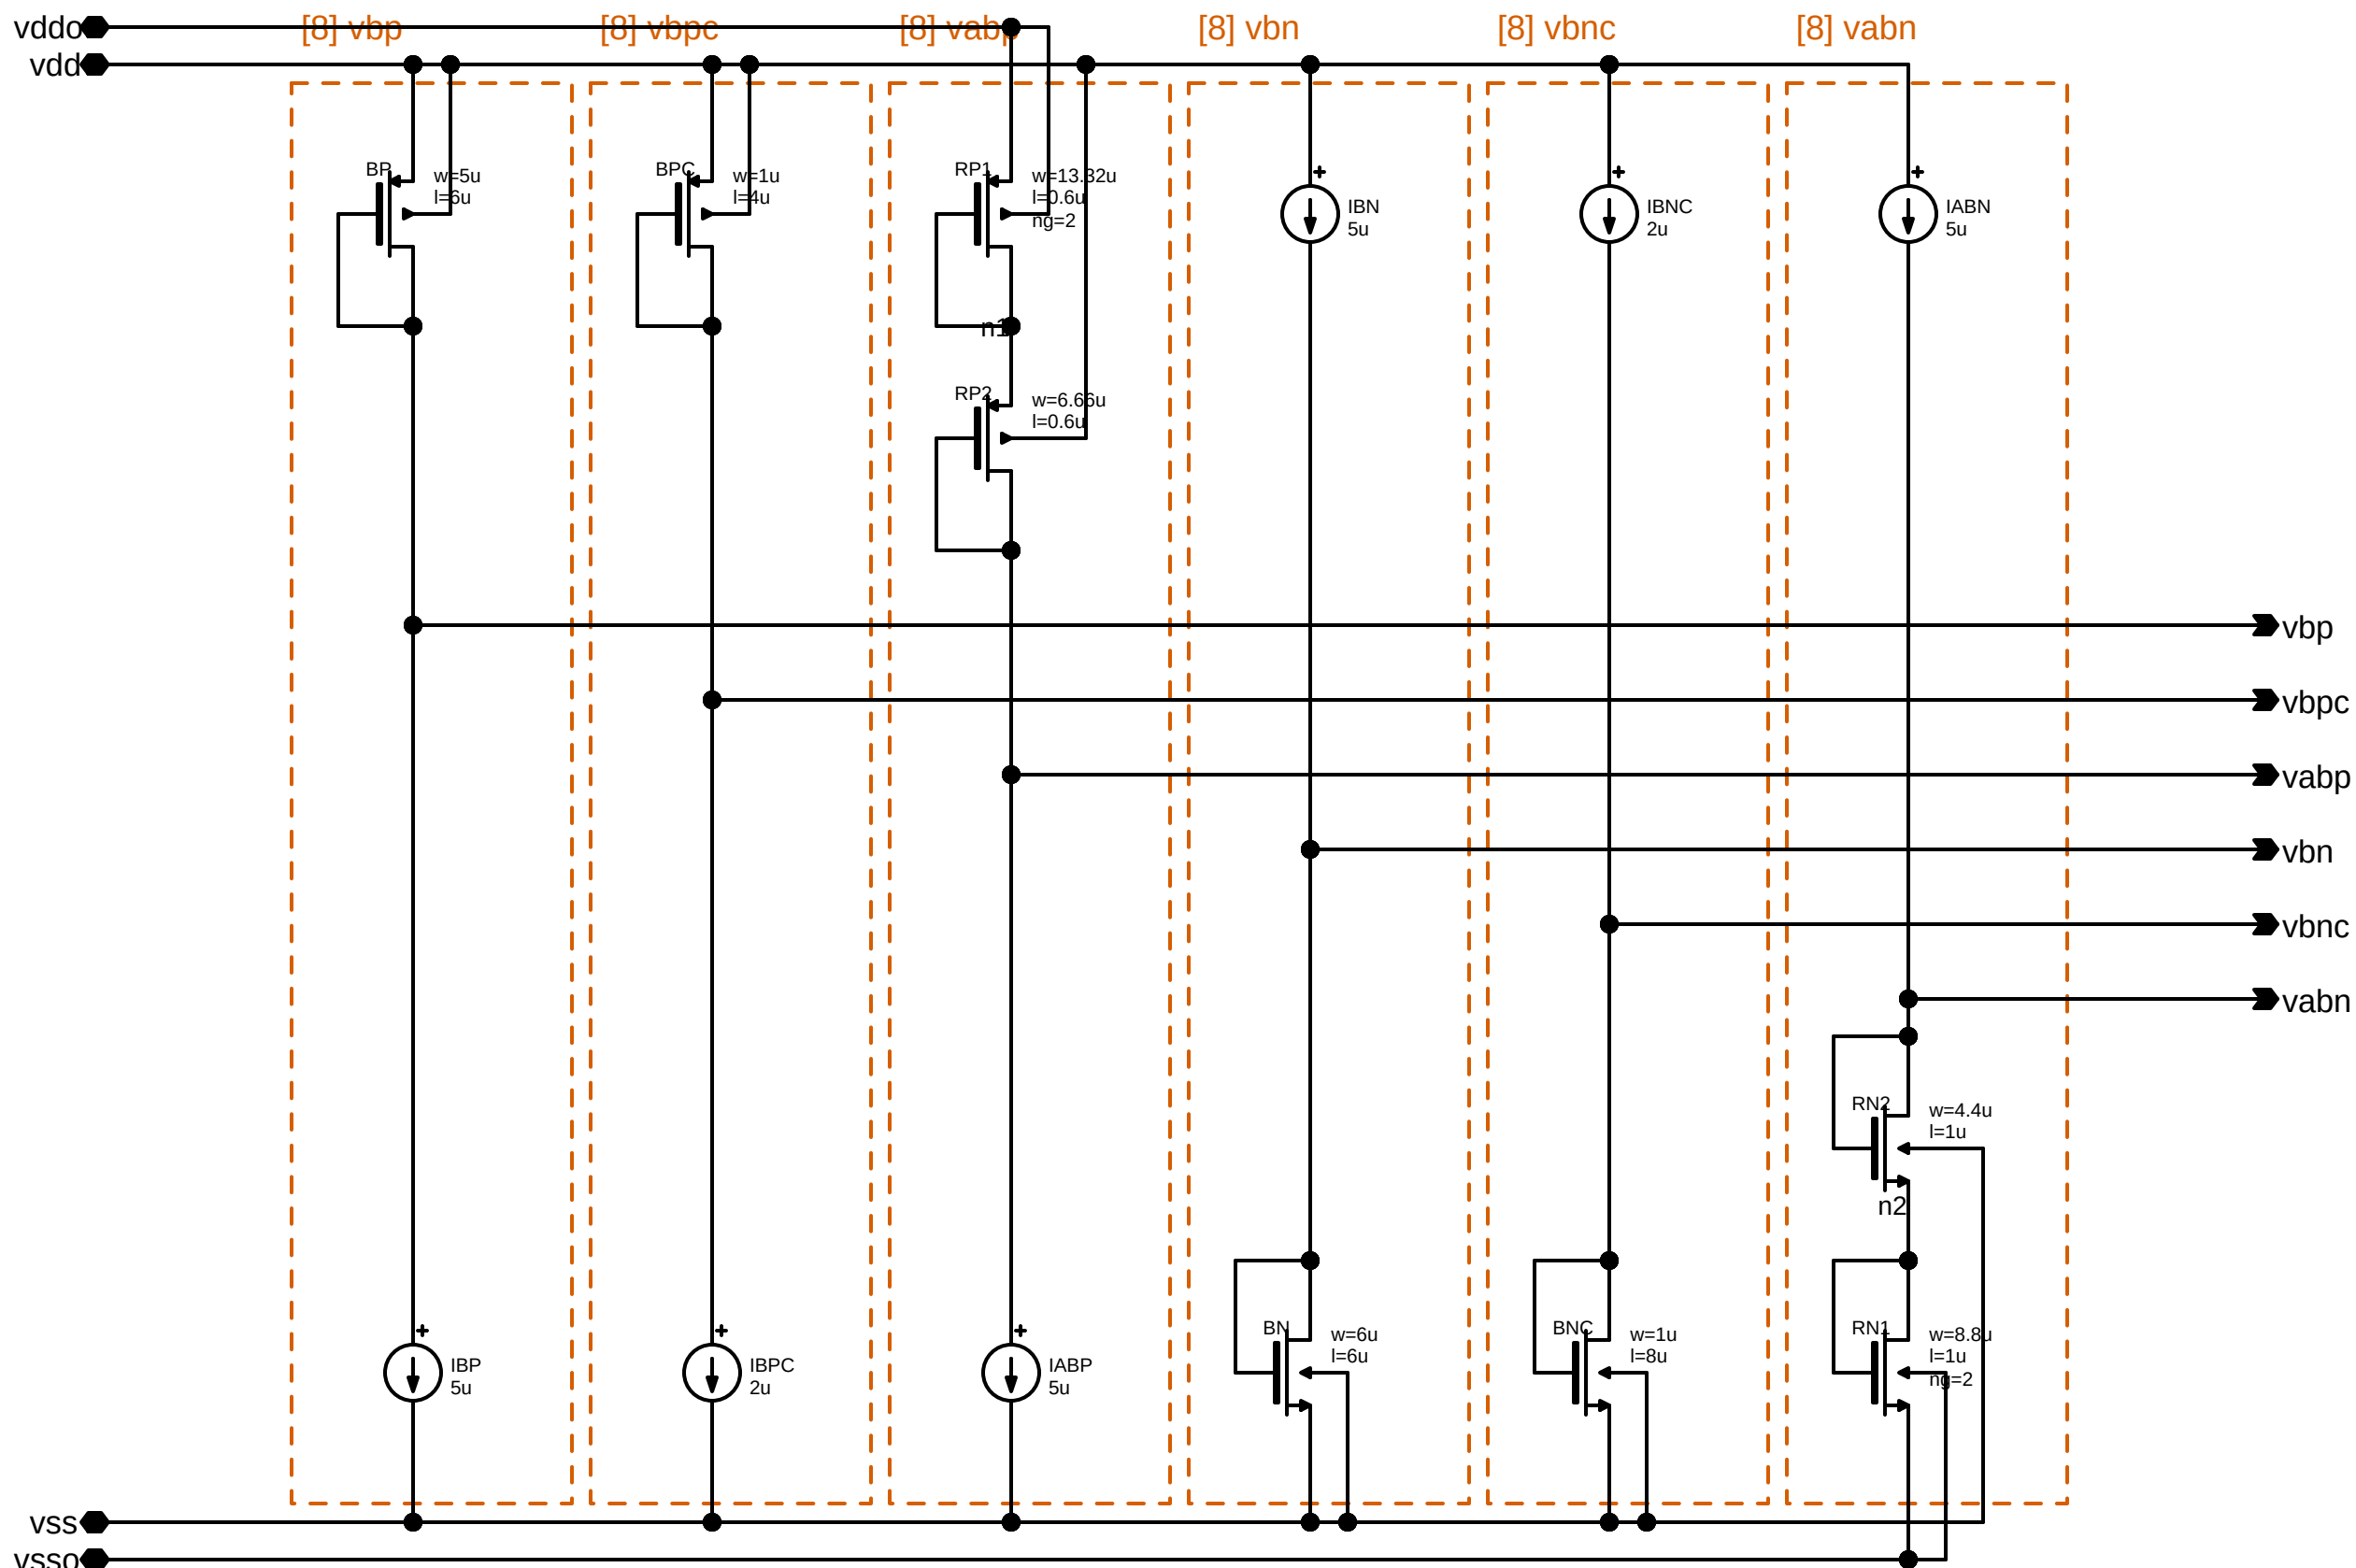

[8] bias: ideal reference currents into diode-connected devices.

vbp: BP 5 μ /6 μ at 5 μ A, for the unit tails Ta, Tb (5 μ /6 μ , 5 μ A each). vbn: BN 6 μ /6 μ at 5 μ A, for the sinks SX, SY (36 μ /6 μ , 30 μ A each).

vbpc: BPC 1 μ /4 μ at 2 μ A, for the mirror cascodes PCL, PCR. vbnc: BNC 1 μ /8 μ at 2 μ A, for the fold cascodes CX, CY.

vabp: RP2 (= ABP) on RP1 (2 x ABP) at 5 μ A, for ABP, FPL. vabn: RN2 (= ABN) on RN1 (2 x ABN) at 5 μ A, for ABN, FNL.