


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

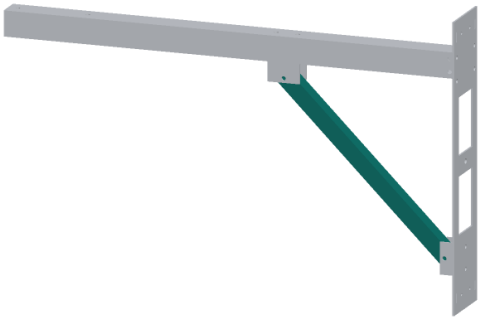

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS


Cut 382 mm of 25 x 25 x 1.6 tube; cut both ends square, deburr.

Drill a 6.6 mm hole across through both walls 12 mm from each end: the two holes are 357.8 mm apart. Drill with the tube flat in a vice.

Fit a 6 mm aluminium crush sleeve (21.8 mm long) at each hole.

Fit: the brace runs at 45 degrees from the clip on the bracket plate up to the clip under the arm (253 mm up and 253 mm out), on one M6 pin at each end. It holds the arm level and takes the load of anything hanging on the head.

Check: hole centres within 0.5 mm; with the arm level, both pins slide in by hand.

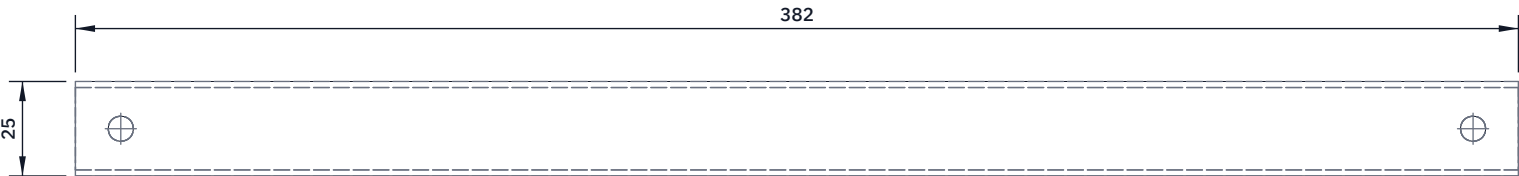


TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

FLOODGAUGE

github.com/BoujeeEnjinia1701/floodgauge

FloodGauge knee brace: making sketch

DRAWING NO. FLG-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium square tube 25 x 25 x 1.6 mm, 6063-T6					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand