



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

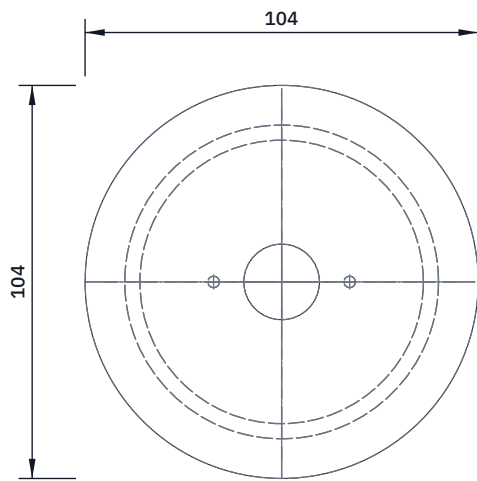


TOP VIEW

Scale 1:2; looking down (along -Z)

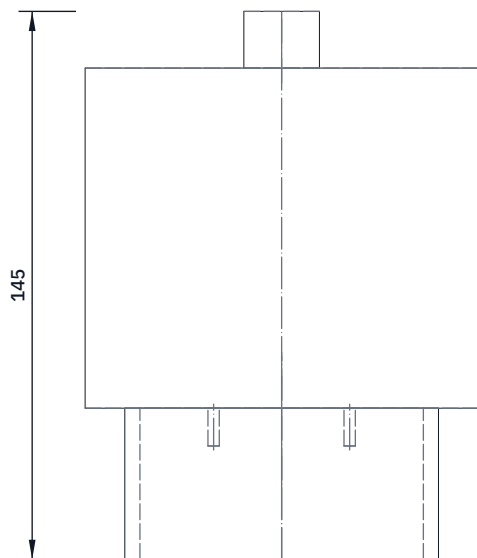


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

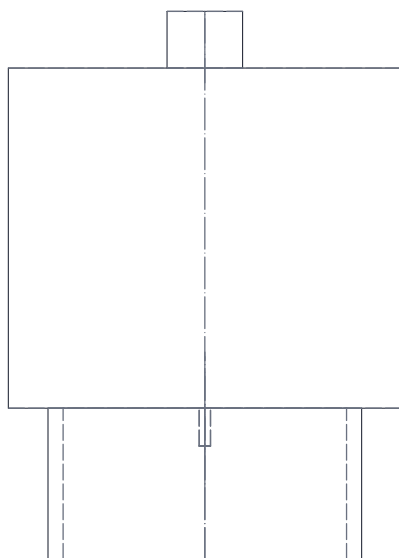

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

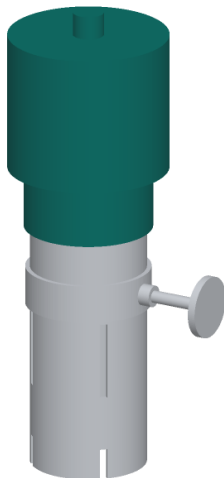

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Body: a sealed PVC cap about 104 mm across and 90 mm tall.

Socket: a 75 mm PVC socket coupling cut to 40 mm, solvent-welded under the body, centred. The tube top slides into it up to the body.

Inside: the ultrasonic ranger, transducer face down and flush with the inside of the socket; the 10 k NTC beside it; two stainless wet probe pins 10 mm below the face, 36 mm apart; a cable gland on top.

Pot the electronics, keeping the transducer face and the probe tips clear of potting compound.

Fit: push over the tube top; two stainless screws through the socket into the tube's pilot holes. Undo them to lift the head for cleaning.

Transducer face 300 mm below the road.

Check: the socket slides fully onto a tube offcut; probe tips clean.

FLOODGAUGE

github.com/BoujeeEnjinia1701/floodgauge

FloodGauge drain head: making sketch

DRAWING NO. FLG-DWG-113			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES PVC cap 104 mm, 75 mm PVC socket, potting compound					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	