


tb_mpdda_loop: loop gain of d2s_mpdda, tt 27 C

loop broken at the vfb gate: Lb closes it at DC, Cb and Vinj inject the AC test signal; $T = -v(vout)/v(fb)$

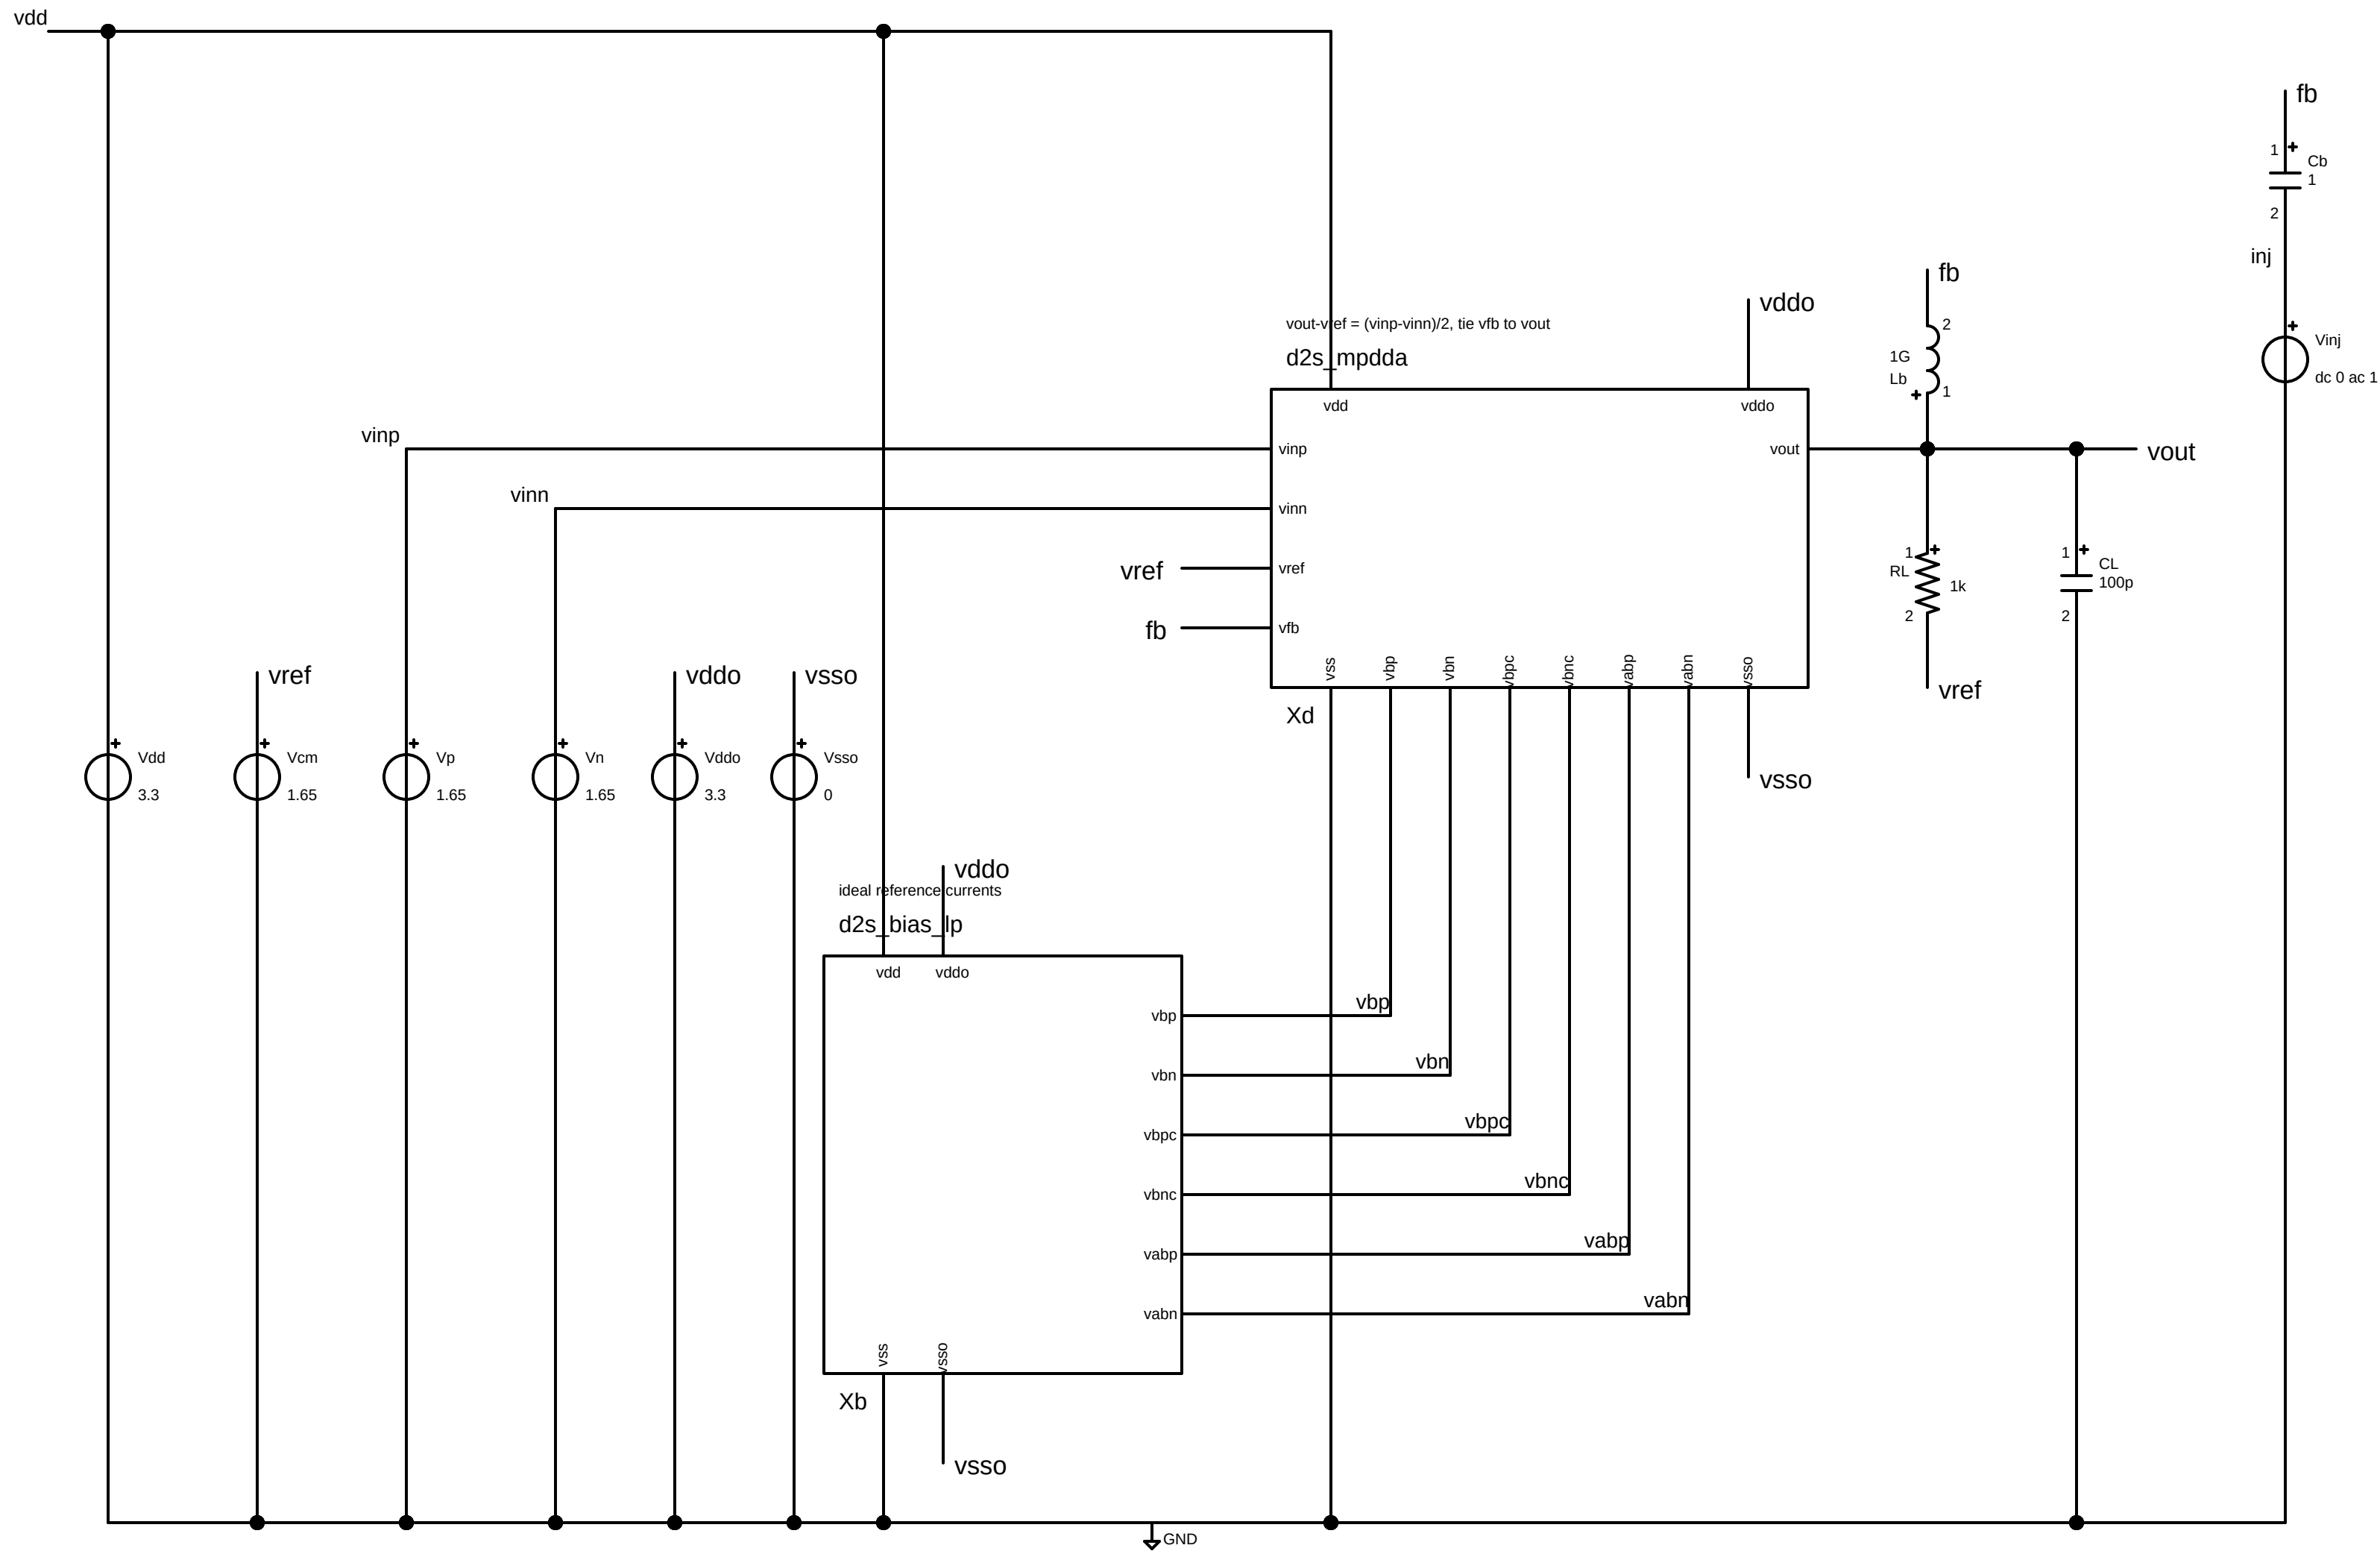

```
s1
.lib cornerM0Shv.lib mos_tt
.lib cornerRES.lib res_typ
.lib cornerCAP.lib cap_typ
.control
ac dec 50 10 1G
let T=-v(vout)/v(fb)
meas ac T0 find vdb(T) at=10
meas ac fc when vdb(T)=0
meas ac pT find vp(T) when vdb(T)=0
let pm=180/pi*pT+180
print T0 fc pm
if $?batchmode = 0
    plot vdb(T) 180/pi*vp(T)
end
.endc
```