REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-24	AC

TOP VIEW

Scale 1:5; looking down (along -Z)

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

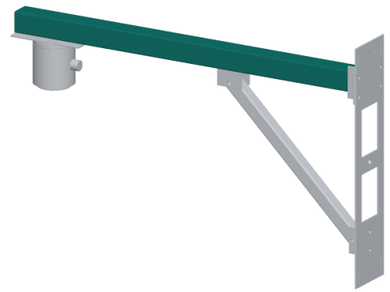

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 715 mm of 40 x 40 x 1.6 tube; square and deburr both ends.
Measure from the pole end (the end that goes between the cleats).
Cleat bolts: two 6.6 mm holes across the side faces, 13 mm from the pole end, 10 mm above and below the centre line. Drill through both sides.
Brace clip bolts: two 6.6 mm holes down through top and bottom, on the centre line, 259 and 293 mm from the pole end.
Head plate bolts: two 6.6 mm holes down through top and bottom, on the centre line, 590 and 700 mm from the pole end.
Use a drill stand so every hole goes square through both walls.
Fit a 6 mm aluminium crush sleeve inside at every bolt so the tube walls are not squeezed in; push a plastic cap into the road end.
The radar head axis is 700 mm from the pole axis.
Check: lay it on the bench; the hole rows line up along the centre.

FLOODGAUGE

github.com/BoujeeEnjinia1701/floodgauge

FloodGauge sensor arm: making sketch

DRAWING NO.	REV	SHEET	SIZE
FLG-DWG-105	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

Aluminium square tube 40 x 40 x 1.6 mm, 6063-T6

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand