


# d2s\_bias\_lp: bias for d2s\_mpdda / d2s\_lc2 (ideal reference currents, $i_{ab} = 5\mu$ , $i_{bnc} = 2\mu$ )

vabp, vabn: replicas of the class-AB pairs (FPL/ABP 6.66 $\mu$ /0.6 $\mu$ , FNL/ABN 4.4 $\mu$ /1 $\mu$ ), stacked on a 2x diode

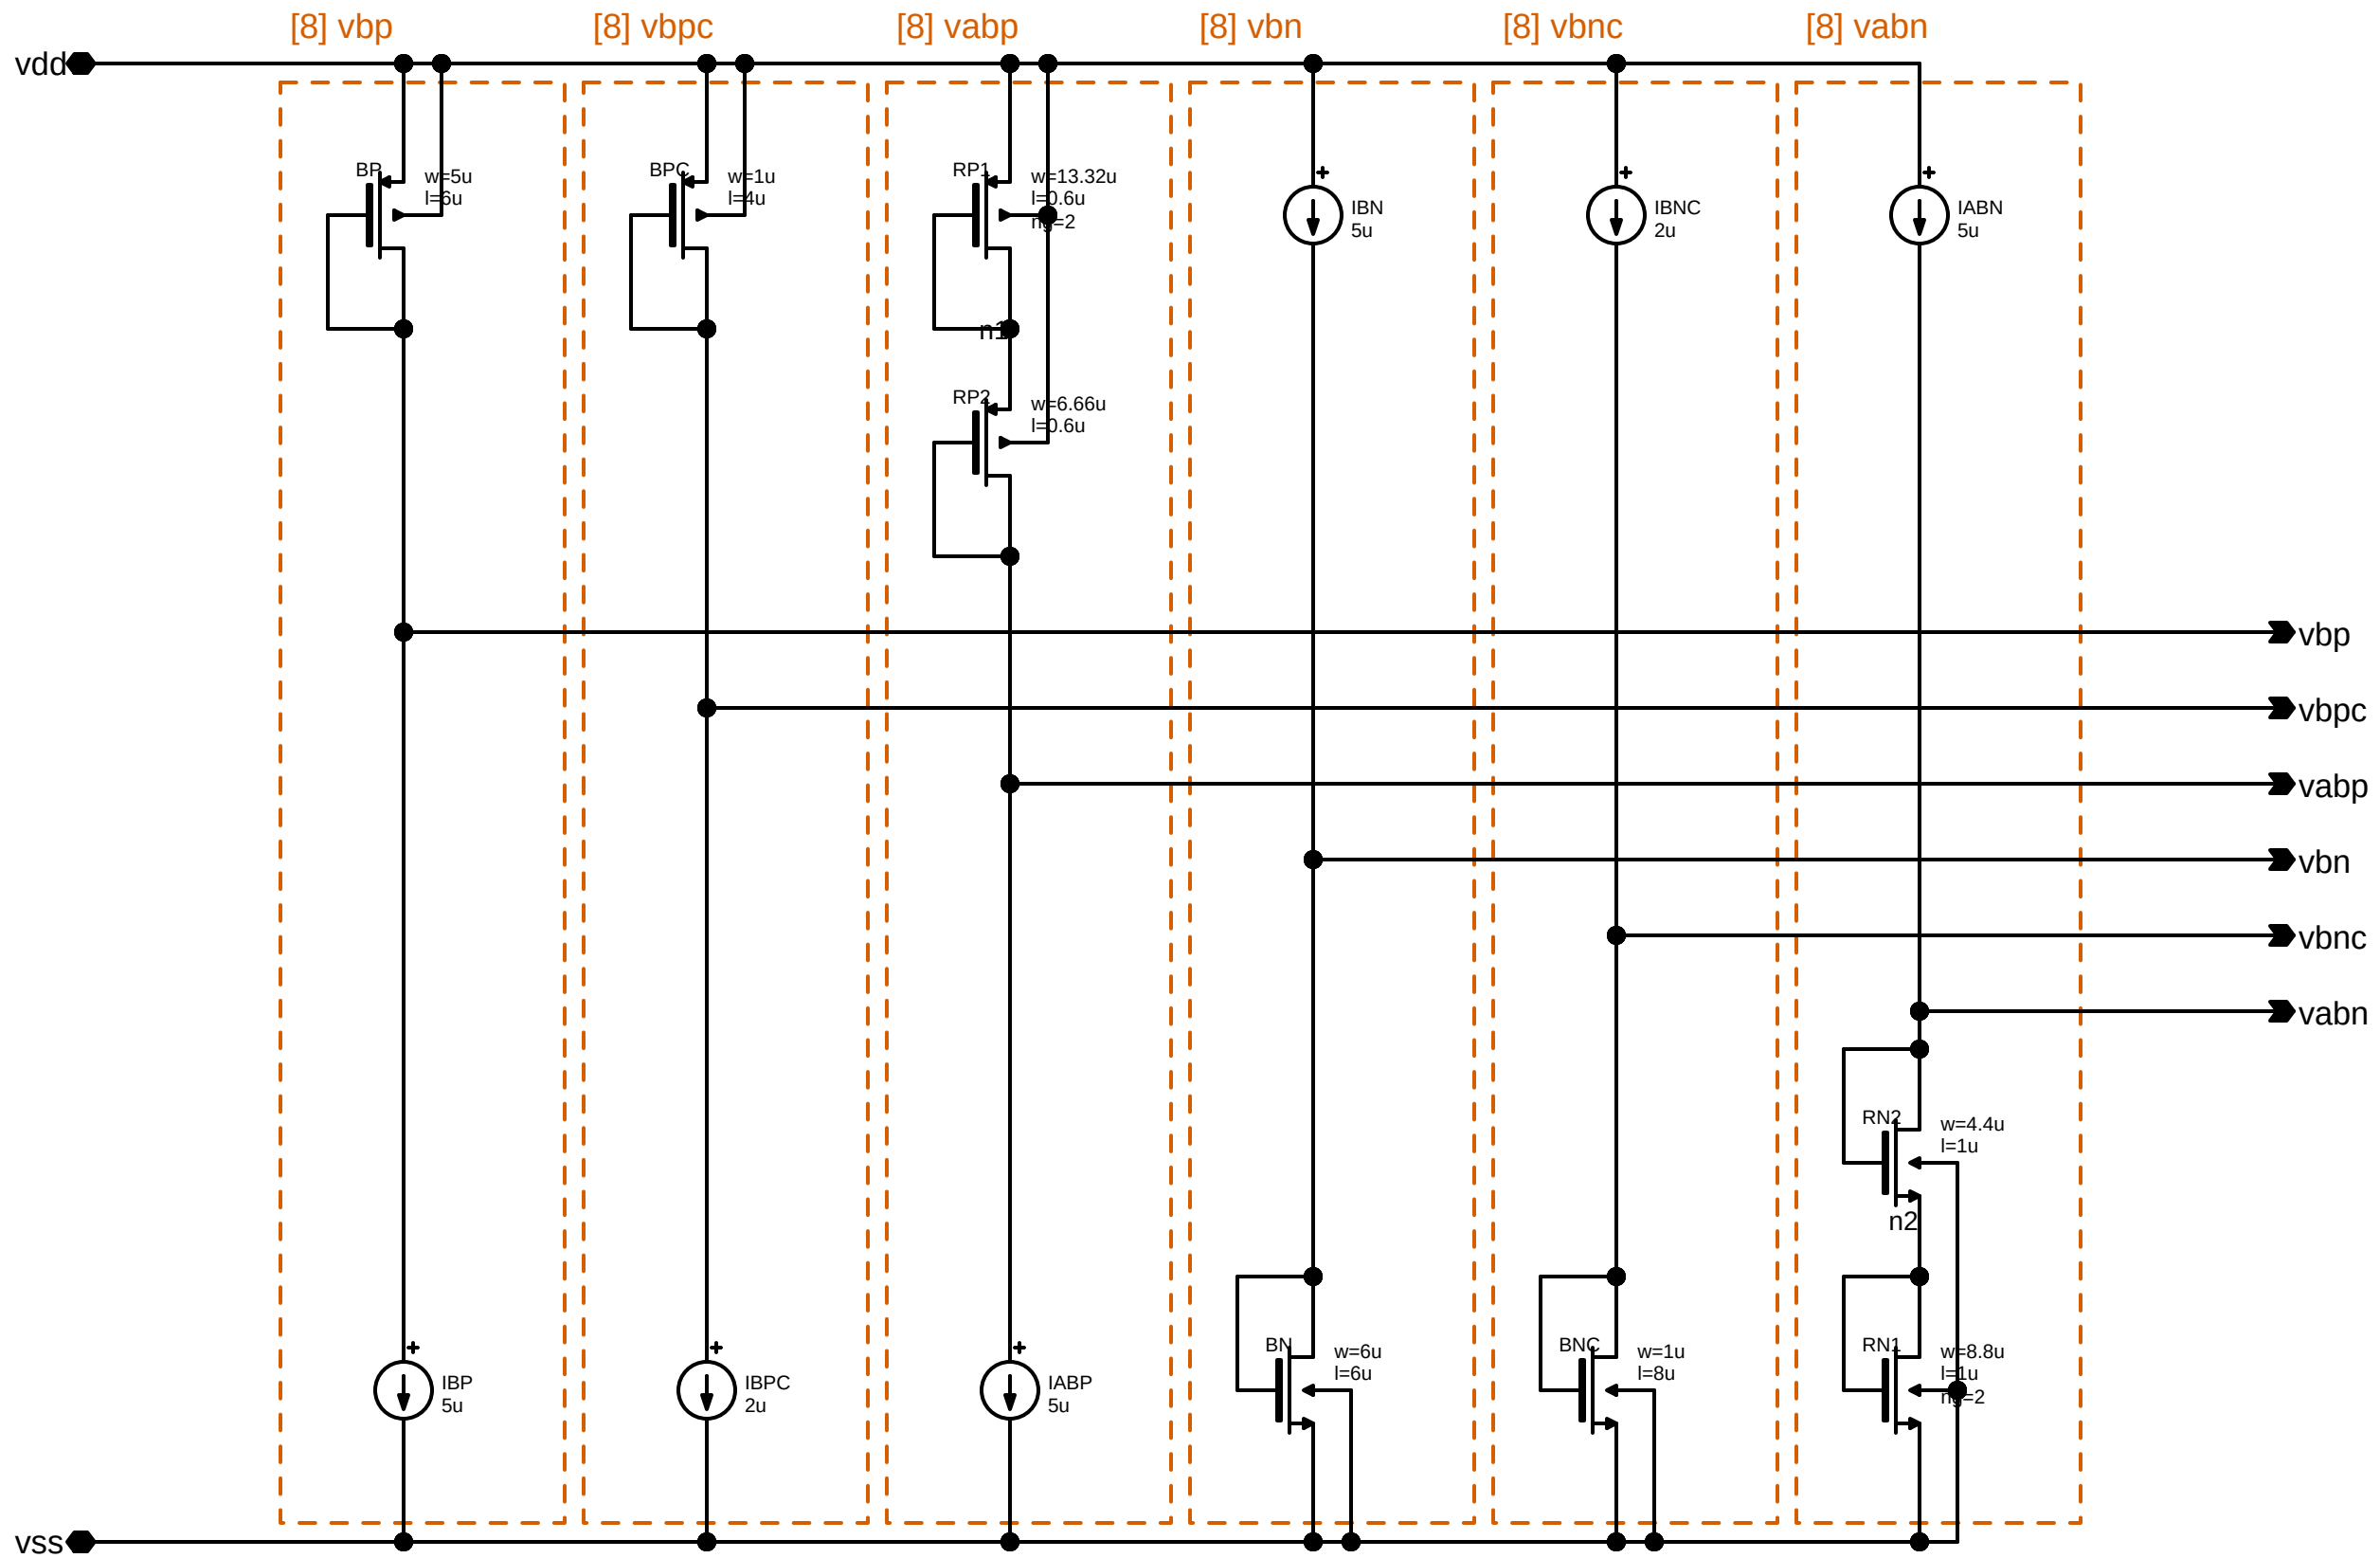

[8] bias: ideal reference currents into diode-connected devices.

vbp: BP 5 $\mu$ /6 $\mu$  at 5  $\mu$ A, for the unit tails Ta, Tb (5 $\mu$ /6 $\mu$ , 5  $\mu$ A each). vbn: BN 6 $\mu$ /6 $\mu$  at 5  $\mu$ A, for the sinks SX, SY (36 $\mu$ /6 $\mu$ , 30  $\mu$ A each).

vbpc: BPC 1 $\mu$ /4 $\mu$  at 2  $\mu$ A, for the mirror cascodes PCL, PCR. vbnc: BNC 1 $\mu$ /8 $\mu$  at 2  $\mu$ A, for the fold cascodes CX, CY.

vabp: RP2 (= ABP) on RP1 (2 x ABP) at 5  $\mu$ A, for ABP, FPL. vabn: RN2 (= ABN) on RN1 (2 x ABN) at 5  $\mu$ A, for ABN, FNL.