
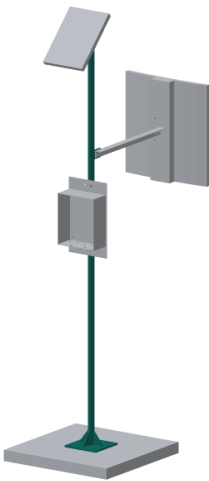
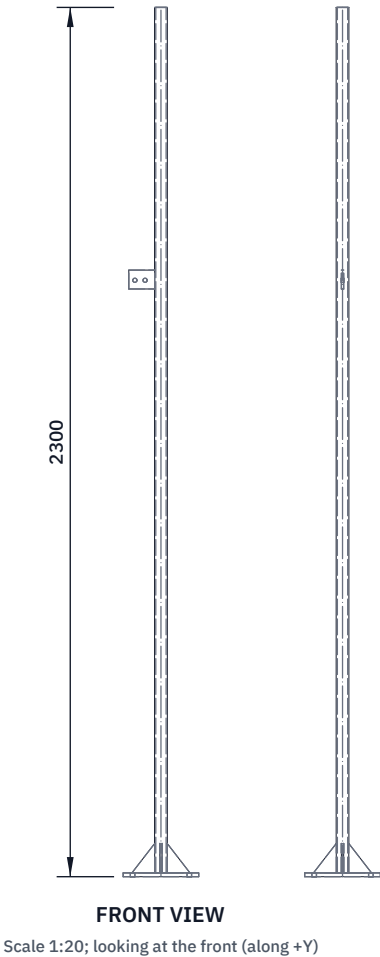


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Pipe: DN25 (1 in) galvanized, 33.7 x 3.2 mm, cut square to 2,290 mm.

Base plate: 200 x 200 x 10 mm steel; four 12 mm holes on a 150 mm square (75 mm each way from the centre) for M10 anchors.

Gussets: four 6 mm plates, triangles 62 mm along the plate and 80 mm up the pipe, one on each side, in line with the plate edges.

Stay lug: 6 mm plate 70 x 50 mm on the bin side of the pipe, centred 1,580 mm above the underside of the base plate, square to the wall; two 11 mm holes 42 and 69 mm from the pipe axis, 2 mm below its middle.

Grind the zinc off 25 mm round every weld first; weld in open air.

Fillet weld the pipe all round to the plate centre, gussets and lug both sides. Paint the welds and the plate with zinc-rich paint.

Fit: four M10 anchors into the pad; stay to the lug; clamps on the pipe.

Check: the pipe stands square to the plate within 1 mm per 300 mm.

GRAINGUARD				github.com/BoujeeEnjinia1701/grainguard			
GrainGuard mast weldment: making sketch							
DRAWING NO. GGD-DWG-102			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES DN25 galvanized pipe 33.7 x 3.2 mm; steel plate 10 and 6 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand			