REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

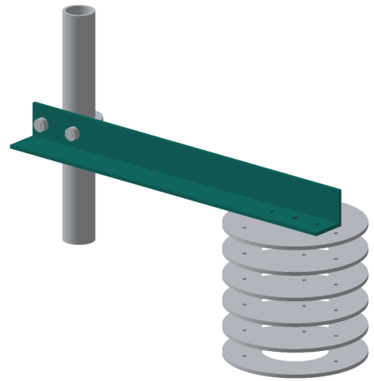

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut one 410 mm length of 40 x 40 x 4 angle; deburr.
One leg stands up against the mast; the other lies flat at the bottom, pointing away from the mast. Call the end at the mast the inner end.
Upright leg: two 9 mm holes 42 mm apart, centred 35 mm from the inner end, 20 mm up (half way).
Flat leg, on its centre line (20 mm from the upright leg): two 5.5 mm holes 335 and 395 mm from the inner end, and a 7 mm hole for the sensor lead 365 mm from the inner end.
Fit: on the side of the mast, 1.96 m up, on a V-saddle and a U-bolt; the shield's top plate is screwed under the flat leg.
Check: the arm is level and square to the mast.

GRAINGUARD

github.com/BoujeeEnjinia1701/grainguard

GrainGuard shield arm: making sketch

DRAWING NO.	REV	SHEET	SIZE
GGD-DWG-110	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

Aluminium equal angle 40 x 40 x 4 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand