



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the TRL 3 model (GVS-CAL-001)	2026-09-25	AC

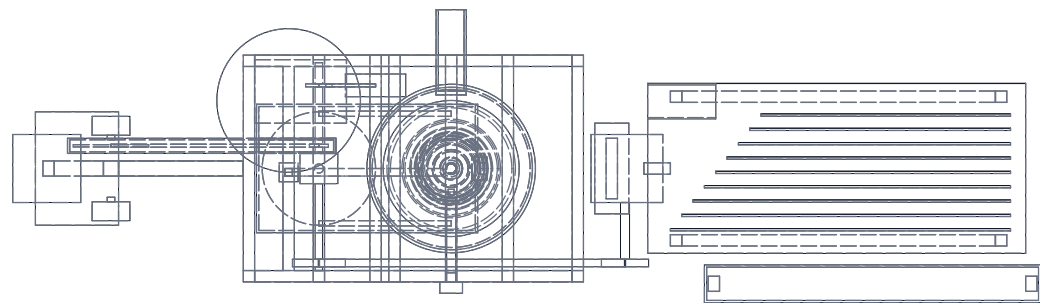


TOP VIEW
Scale 1:20

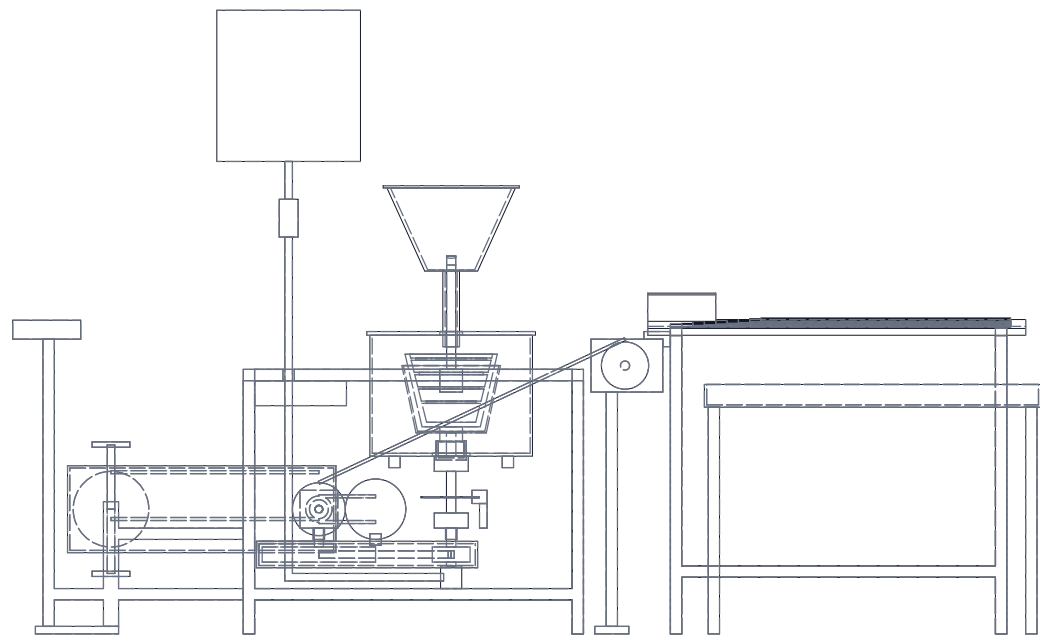

FRONT VIEW
Scale 1:20

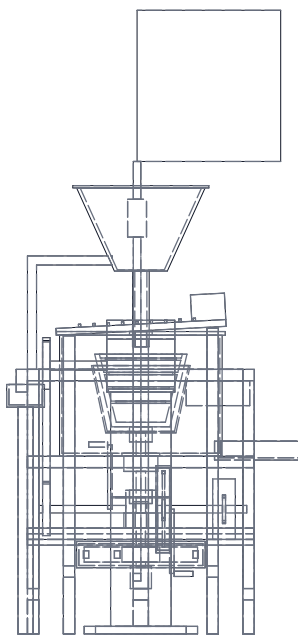

RIGHT VIEW
Scale 1:20

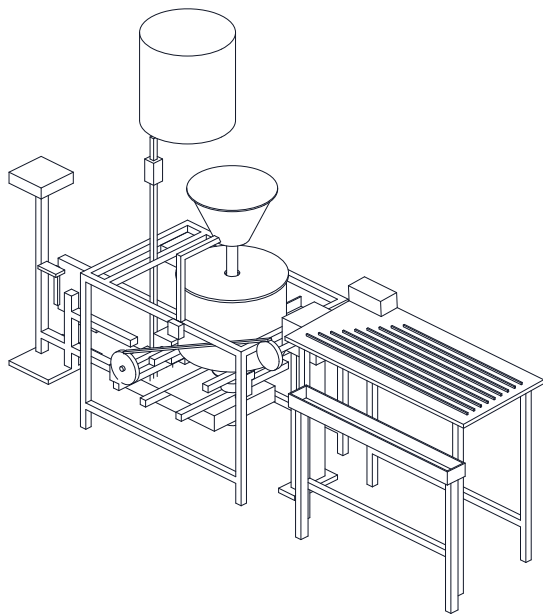

ISOMETRIC VIEW
Not to scale

KEY DIMENSIONS AND INTERFACES (MM)

Overall 2720 x 775 x 1650; about 88 kg in 6 loads (est.)
Frame 900 x 600 x 700, 30 x 30 x 2 tube
Bowl lip 220, base 130, depth 180; 4 rings, pitch 38
Liner 8 PU on 4 GFRP; jacket gap 12; about 89 holes 1.0
Spindle 25 stainless, 2 x UCF205; 1/2 in rotary union at foot
Drive 48T/12T chain, 1:1 bevel, 300/100 belt = 12:1
730 rpm (60 G at r 100) at 61 rpm cadence; limit 900 rpm
Brake: 160 disc, parking latch, lid pin interlock
Tub 430 HDPE, lid 10 HDPE; tank 60 L on 1250 post
Table 1000 x 450, tilt 3 deg; head pulley 125
MotionCore module + 250 W hub motor, step-up 1.2:1
Fluidization hose 3/4 in minimum (GVS-CAL-001)
PRELIMINARY, NOT FOR FABRICATION

GRAVITYSORT

General arrangement, gravity concentrator

DRAWING NO. GVS-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-25	DRAWN Amish Chadha	
MATERIAL / NOTES Frame 30 x 30 x 2 steel tube; bowl PU on GFRP; tub HDPE. See bom/bom.csv					