




| REV | DESCRIPTION                                | DATE       | BY |
|-----|--------------------------------------------|------------|----|
| P1  | Making sketch for the prototype build plan | 2026-10-01 | AC |

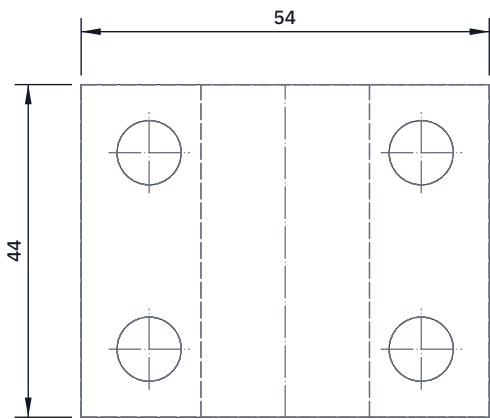


TOP VIEW  
Scale 1:1; looking down (along -Z)

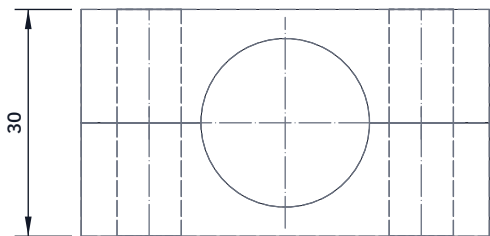

FRONT VIEW  
Scale 1:1; looking at the front (along +Y)



RIGHT VIEW  
Scale 1:1; looking at the right side (along -X)

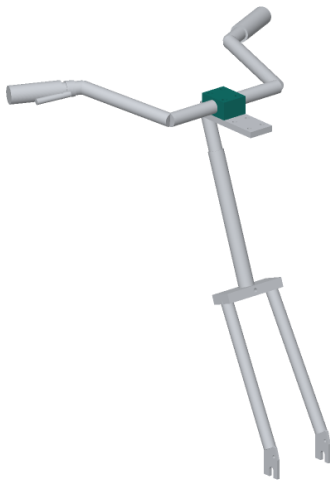

WHERE IT GOES  
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Saw 56 long from 45 x 30 flat bar; file or mill to 54 x 44 x 30.

Drill the bar hole across the 44 width at mid-length, 15 up from the bottom: pilot, then 22 mm, then ream 22.2 (or bore it).

Drill four 8.5 holes straight through, 18 each side of the bar hole and 13 each side of the middle.

Saw the block in half along the bar hole's center line; file the two sawn faces flat so the halves clamp the bar with a 1 mm gap.

Break every edge, especially round the bar hole.

Fit: the lower half sits on the head plate over one of the two hole sets; the cap goes on over the bar; four M8 x 40 bolts (13 mm heads) go through both halves into the tapped plate.

Check: the bar turns in the closed clamp only with a firm twist.

GROWRIDER

[github.com/BoujeeEnjinia1701/growrider](https://github.com/BoujeeEnjinia1701/growrider)

GrowRider bar clamp block (two halves): making sketch

DRAWING NO.  
GRR-DWG-107

REV  
P1

SHEET  
1 of 1

SIZE  
ANSI B

SCALE

1:1

UNITS

mm

PROJECTION



DATE

2026-10-01

DRAWN

Amish Chadha

MATERIAL / NOTES

Aluminium 6061-T6 flat bar 45 x 30 mm (or 50 x 30)