



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the TRL 3 parametric model (HBN-CAL-001)	2026-09-25	AC

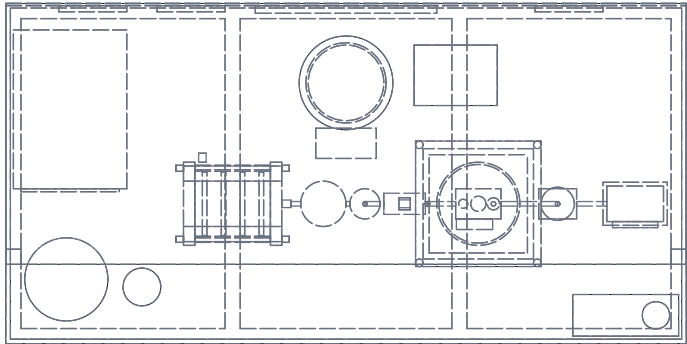


TOP VIEW
Scale 1:10

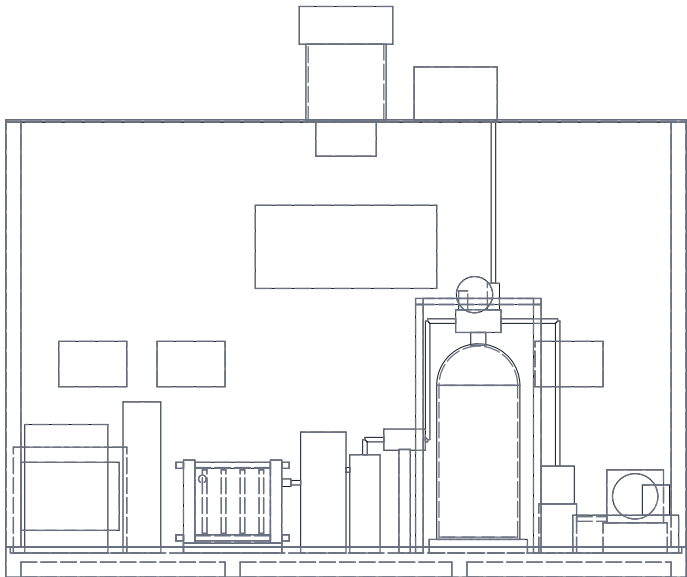

FRONT VIEW
Scale 1:10

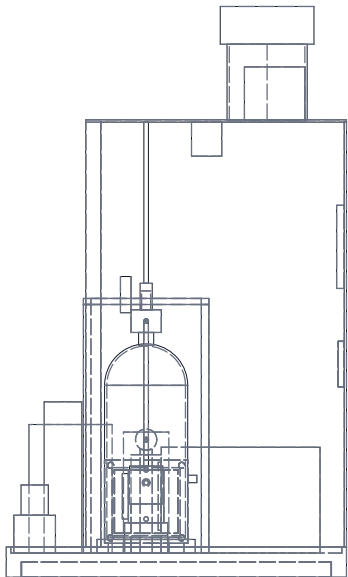

RIGHT VIEW
Scale 1:10

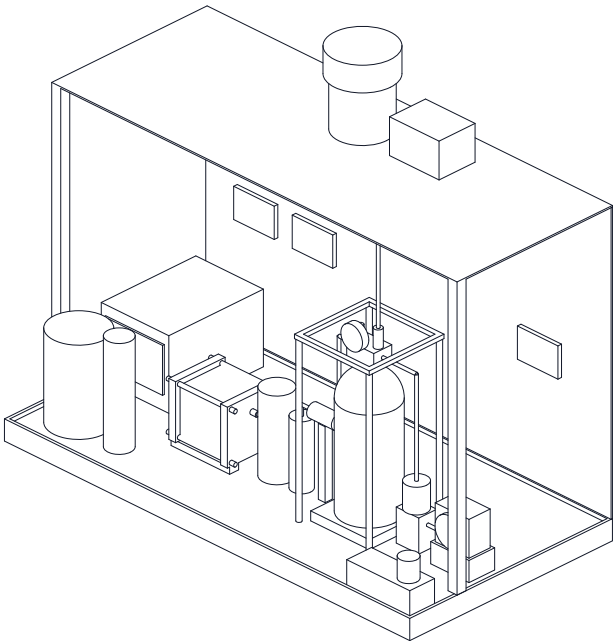

ISOMETRIC VIEW
Not to scale

KEY DIMENSIONS AND INTERFACES (MM)

Bench 900 x 450, 755 tall above the lab table
Deck top 32; canopy underside 602; duct 100 ID
Energy flows left to right: supply, water, stack, separator and drier, arrestor, tank, regulator, fuel cell
Tank 2.00 L internal, OD 110, wall 3, straight 201; guard rods at 78 from the axis
Working 300 kPa g; relief 350 kPa g (325 proposed)
Relief and vent lines 6 OD to the canopy high point
Vent needle valve: 300 to 20 kPa g in 3 min or more
H2Guard sensor at the canopy high point beside the duct
Fuel cell supply about 50 kPa g; 12 W class, 75 x 47 x 70
Mass about 25.2 kg (HBN-CAL-001); H2Guard costed separately
PRELIMINARY, NOT FOR FABRICATION

H2BENCH

General arrangement, hydrogen teaching bench

DRAWING NO. HBN-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Frame 20 x 20 Al extrusion; deck 12 HDPE; canopy 3 PC; tank Al, 1 MPa rated. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com			Generated from cad/src; do not edit by hand		