



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

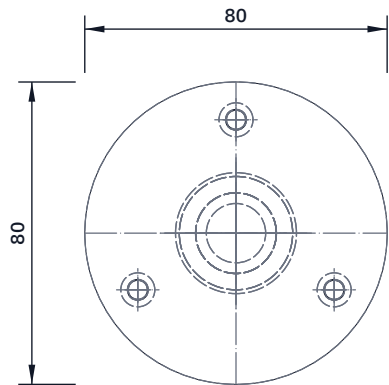


TOP VIEW

Scale 1:2; looking down (along -Z)

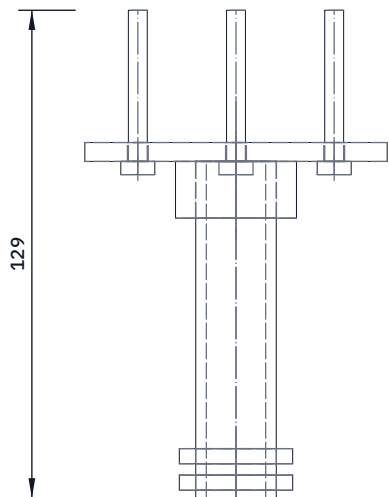


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

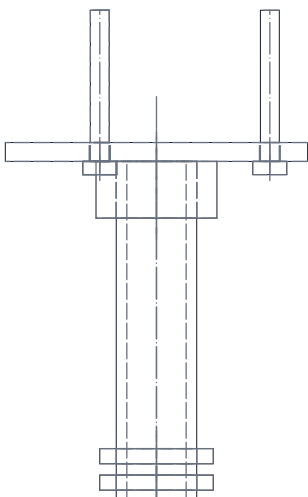

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

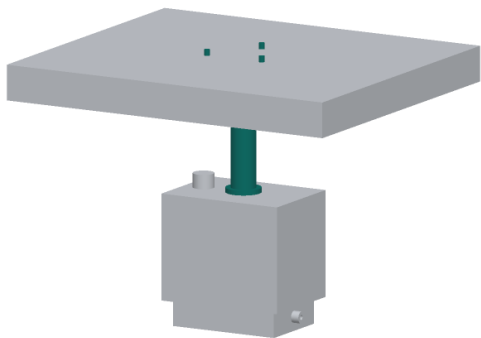

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Ceiling plate: a 1/2 in floor flange about 80 mm across. Drill or open three 5.5 mm holes on a 60 mm circle if it has none.

Rod: a 1/2 in steel pipe nipple, 89 mm long, 21.3 mm across, threaded at both ends. Screw it hand tight into the flange.

Run one locknut up the rod so its underside is 85 mm below the flange's ceiling face: the head top sits on it, 85 mm down.

Fit: flange on the ceiling directly over the apparatus centre (plumb line), three M5 x 40 screws into ceiling plugs.

The rod goes up through the 21.7 mm hole in the head top; the second locknut goes on inside, through the open front.

Check: ports 175 mm below the ceiling, over the apparatus; the head does not turn when pushed by hand.

H2GUARD

github.com/BoujeeEnjinia1701/h2guard

H2Guard ceiling drop rod and ceiling plate: making sketch

DRAWING NO. HGD-DWG-110			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Bought: 1/2 in malleable iron floor flange, 1/2 in steel pipe nipple, two conduit locknuts					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	