



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

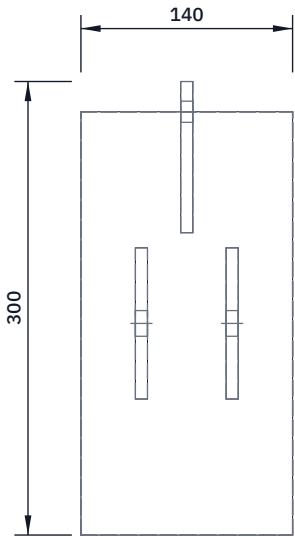


TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)

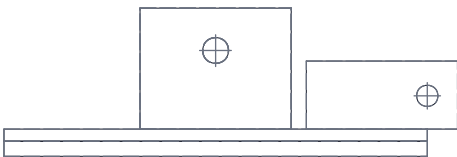

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

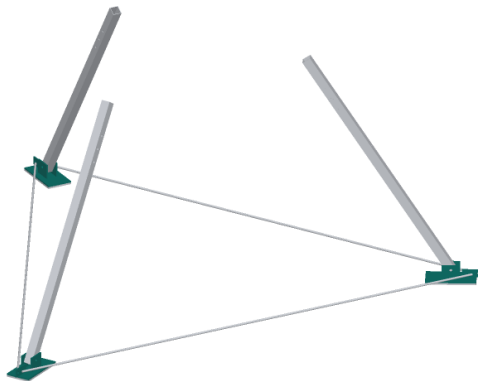

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Base plate 140 x 280 x 8; rubber pad the same size bonded under
Two clevis plates 100 long x 80 high x 8, 52 apart inside
17 mm pin hole in both, 70 above the ground, 50 from the clevis ends
Clevis centred 140 from each end of the base plate
Chain lug 8 thick, 100 x 45, at the outer end; 14 mm hole 140 out
Weld clevis and lug to the base with 5 mm fillets both sides
Clamp a 52 mm spacer between the clevis plates while welding
Galvanize, then bond the pad with contact adhesive
Fits: lower leg sits between the clevis plates on an M16 bolt
through a steel crush sleeve; chains shackle to the lug
Make 3

HATCHSIDE

github.com/BoujeeEnjinia1701/hatchside

Foot with clevis and chain lug: making sketch

DRAWING NO. HTS-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 8 mm S275 plate, hot-dip galvanized; 10 mm rubber pad					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand