

GENERAL NOTES:

- 1. INSTALLATION SHALL COMPLY WITH NEC, NFPA 72 AND ALL OTHER APPLICABLE CODES AS REQUIRED BY THE LOCAL AUTHORITY HAVING JURISDICTION. CLASS "A" WIRING IS REQUIRED.
- 2. WIRING DEPICTED ON THESE PLANS IS SCHEMATIC - ACTUAL WIRE LOCATIONS MAY DIFFER FROM THESE PLANS. WIRING SHALL BE PERFORMED AS ACTUAL BUILDING CONSTRUCTION CONDITIONS ALLOW AND TO MINIMIZE PENETRATIONS THROUGH AREA SEPARATION WALLS AND FIRE WALLS. THE USE OF A RACEWAY IS PERMITTED AS LONG AS NO 110V OR HIGHER VOLTAGE CABLES ARE IN THE SAME RACEWAY.
- 3. POWER-LIMITED AND NON-POWER-LIMITED CIRCUIT WIRING MUST REMAIN SEPARATED IN CABINET. ALL POWER-LIMITED CIRCUIT WIRING MUST REMAIN AT LEAST 0.25" AWAY FROM ANY NON-POWER-LIMITED CIRCUIT WIRING. FURTHERMORE, ALL POWER-LIMITED AND NON-POWER-LIMITED CIRCUIT WIRING MUST ENTER AND EXIT THE CABINET THROUGH DIFFERENT KNOCK OUTS AND/OR SEPARATE CONDUITS.
- 4. SMOKE DETECTORS SHALL BE INSTALLED AND COVERED UNTIL TESTING AND FINAL INSPECTION ARE COMPLETED. DO NOT INSTALL SMOKE DETECTORS UNTIL BUILDING IS CLEAN.
- 5. LOCATE SMOKE DETECTORS A MINIMUM OF THREE (3) FEET FROM MECHANICAL DIFFUSERS.
- 6. PROVIDE SYNCHRONIZATION OF ALL VISUAL NOTIFICATION APPLIANCE CIRCUITS. PROVIDE ALL REQUIRED SYNC MODULES. A MULTI-SYNC MODE SLAVE CONNECTION BETWEEN ALL SYNC MODULES.
- 7. ONLY FIRE ALARM WIRING IS PERMITTED IN FIRE ALARM CONDUIT. 110V OR HIGHER VOLTAGE CABLES ARE NOT ALLOWED IN FIRE ALARM CONDUIT.
- 8. DO NOT USE SHIELDED WIRE ON ADDRESSABLE CIRCUITS.
- 9. FIRE ALARM CIRCUITS NEED TO BE FREE OF GROUNDS, FAULTS, AND SHORTS PRIOR TO CONNECTION TO FIRE ALARM EQUIPMENT.
- 10. A SMOKE DETECTOR MUST BE IN EVERY ROOM WITH A FIRE ALARM CONTROL UNIT, POWER SUPPLY, OR ANNUNCIATOR.
- 11. DEDICATED 120 VAC CIRCUITS WILL BE MARKED AS "FIRE ALARM CIRCUIT" AND BE ACCESSIBLE ONLY TO PERSONNEL. DISCONNECTS FOR THESE CIRCUITS WILL BE RED IN COLOR AND THEIR LOCATION WILL BE NOTED AT EACH CONTROL UNIT.

SYSTEM NOTES:

- ① TO FACU IN ELECTRICAL H028
- ② TO TRANSPONDER IN ELECTRICAL H028

REVISION NOTES:


- △ ADDED SMOKE DETECTOR (5/3/2017)

WIRE SCHEDULE		
NOTE	DESCRIPTION	WIRES
A	ADDRESSABLE CIRCUIT	1 PAIR #14'S TWISTED
B	RELAY CIRCUIT	2 #14'S
C	24 VDC AUX POWER	2 #14'S
D	120 VAC POWER	3 #12'S
E	HORN/STROBE CIRCUIT	2 #14'S
F	REMOTE ANNUNCIATOR	3 PAIR #16'S TWISTED


DEVICE LEGEND

SYMBOL	DESCRIPTION
③	SMOKE DETECTOR
F	PULL STATION
TS	TAMPER SWITCH
WF	WATERFLOW SWITCH
MM	MONITOR MODULE
L	STROBE ONLY
HS	HORN/STROBE
RA	REMOTE ANNUNCIATOR
FACU	FIRE ALARM CONTROL UNIT
TRAN	TRANSPONDER PANEL

LEVEL 2

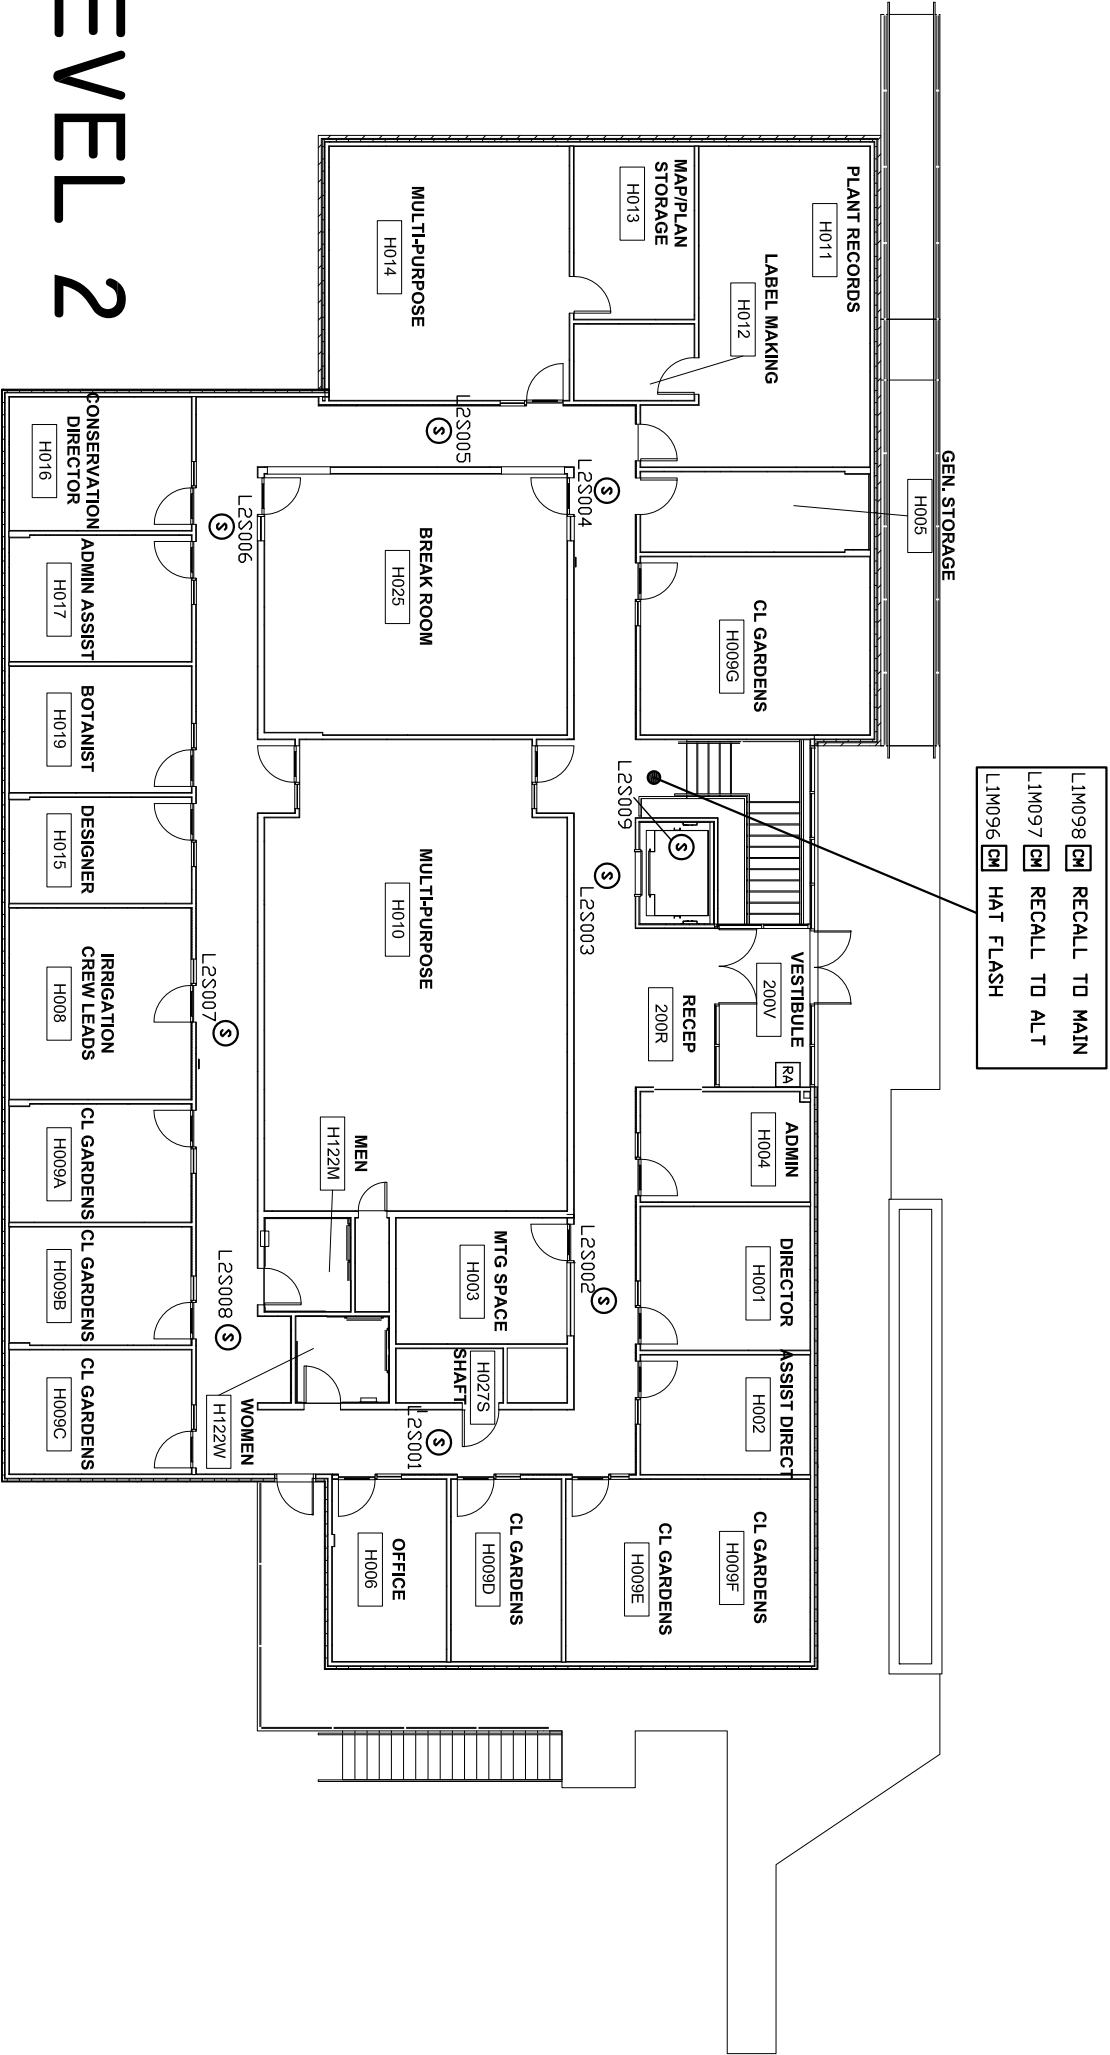

LEVEL 1

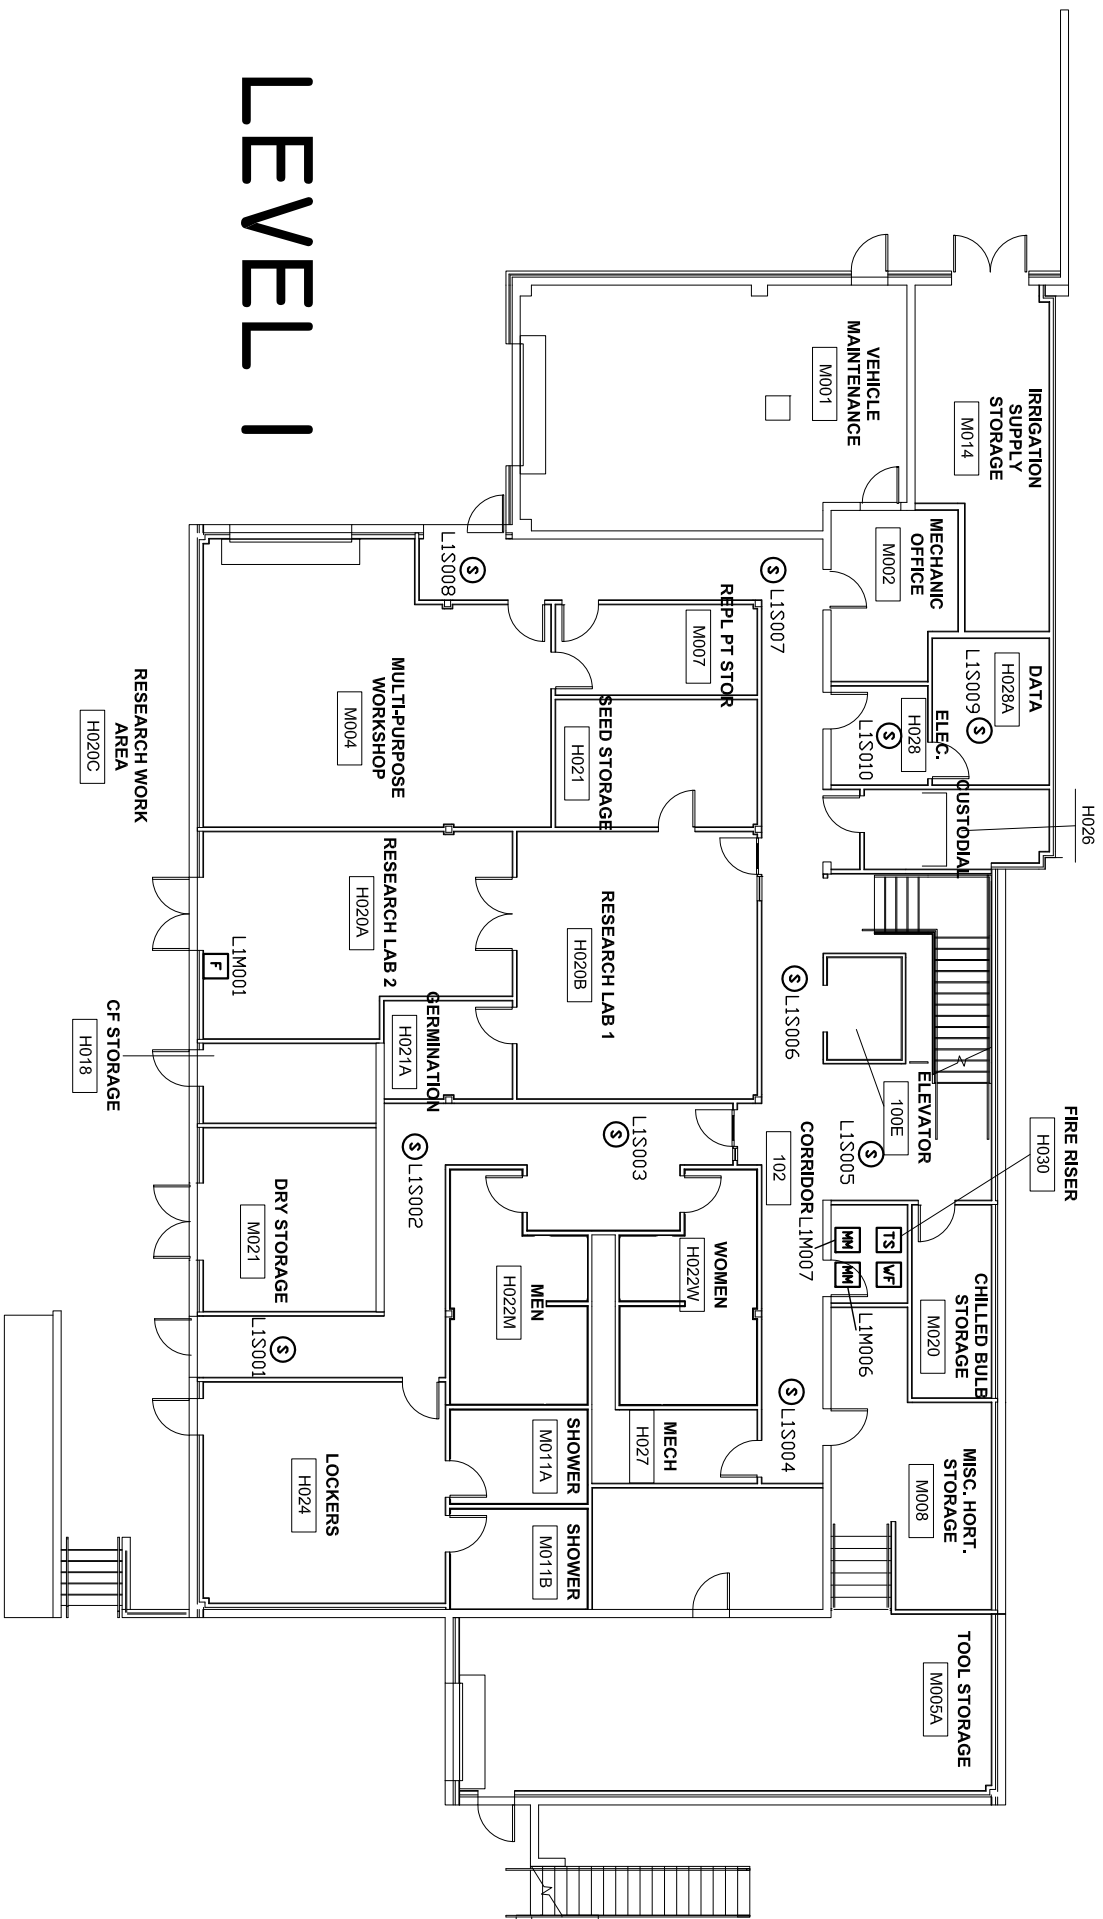

NOTE:
NFS DRAWINGS ARE BASED ON THE PROJECT ARCHITECTURE/ENGINEER (A/E) PLANS AND SPECIFICATIONS FURNISHED TO NFS. A/E IS SOLELY RESPONSIBLE (NOT NFS) FOR THE TYPE, SIZE, LOCATION, AND SUITABILITY OF ALL FIRE ALARMS, CONTROL PANELS, AND OTHER DEVICES SHOWN ON THE A/E PLANS. NFS DRAWINGS ARE TO SHOW ONLY THE WIRING DIAGRAMS BETWEEN FIRE ALARM DEVICES AND CONTROL PANELS. NFS IS NOT RESPONSIBLE FOR THE INFORMATION SHOWN ON THE A/E PLANS.

RED BUTTE GARDEN
HORTICULTURAL ADMINISTRATION & MAINTENANCE
FLOORPLAN LEVELS 1 & 2
300 RED BUTTE CANYON ROAD
SALT LAKE CITY, UT 84108
FIRE ALARM SYSTEM

NFS
NELSON FIRE SYSTEMS
801-468-8300

DRAWN BY: BDT
DESIGNED BY: XXXX
APPROVED BY: DS
DATE: 3/17/2017
SCALE: (ARCH C) 1/16" = 1'
PROJECT NO: XXXX
REVISION NO: XXXX
DRAWING NAME: RED BUTTE GARDEN H ADMIN.DWG

NELSON FIRE SYSTEMS
FLOORPLAN LEVELS 1 & 2
NUMBERS

PAGE:
FA-1-03

