


Adafruit Huzzah32 ESP32 Feather

Pin Mapping for Arduino

The Adafruit ESP32 Feather is a versatile development board featuring 40 digital IO pins. Of these, 16 pins support external interrupts, 16 pins can be used as analog input pins, and 17 pins support Pulse-Width Modulation (PWM). Below is the detailed pinout mapping for the Adafruit ESP32 Feather.

Adafruit HUZZAH32 ESP32 Feather

<http://www.adafruit.com/products/3405>

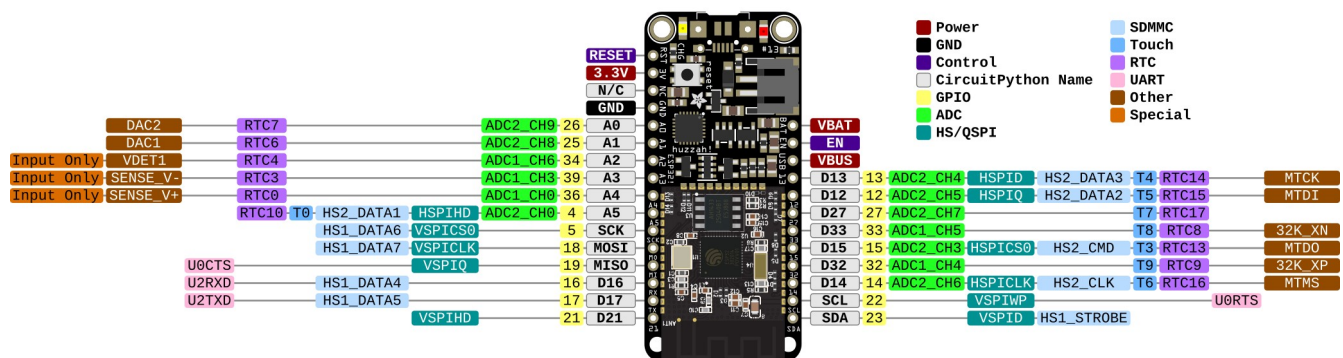

Pinout Table

Pin	Analog	Touch	PWM	Other
4	A5	T0	PWM	
5			PWM	SCK
12	A11	T5	PWM	
13	A12	T4	PWM	LED_BUILTIN
14	A6	T6	PWM	
15	A8	T3	PWM	
16			PWM	RX
17			PWM	TX
18			PWM	MOSI
19			PWM	MISO
22			PWM	SCL
23			PWM	SDA
25	A1		PWM	DAC1
26	A0		PWM	DAC2
27	A10	T7	PWM	

32	A7	T9	PWM	
33	A9	T8	PWM	SS
34	A2			
35	A13			BATT_MONITOR
36	A4			
39	A3			

Pin Function Descriptions

- Analog: Pins that can be used as analog input pins.
- Touch: Pins that support touch input functionality.
- PWM: Pins that support Pulse-Width Modulation.
- Other: Additional functions such as:
 - RX / TX: Receive and Transmit pins for serial communication.
 - LED_BUILTIN: Pin connected to the built-in LED.
 - SCK, MOSI, MISO: SPI communication pins.
 - SCL, SDA: I2C communication pins.
 - DAC1, DAC2: Digital-to-Analog Converter pins.
 - SS: Slave Select pin for SPI.
 - BATT_MONITOR: Battery voltage monitoring pin.