
CONCEPT, NOT FOR FABRICATION


HatchSide · github.com/BoujeeEnjinia1701/hatchside

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the TRL 3 model (HTS-CAL-001)	2026-10-03	AC
P2	Design for construction (HTS-DDR-002)	2026-10-03	AC
P3	Redrawn from the kit 1.9 detailed model (HTS-DDR-004)	2026-11-05	AC

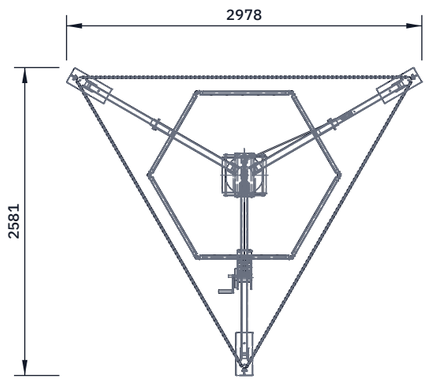


TOP VIEW

Scale 1:50; looking down (along -Z)

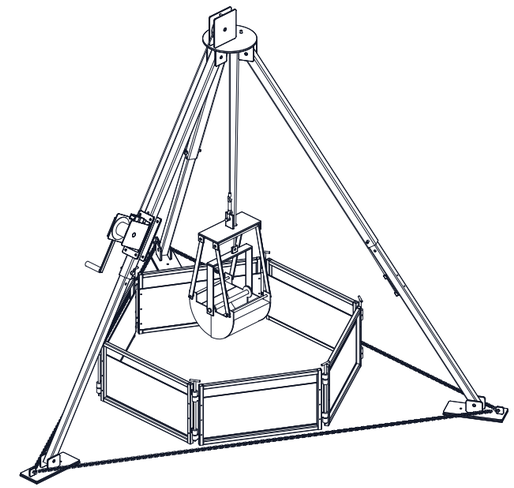


ISOMETRIC VIEW

Not to scale; grab on the rope; seen from the front right and above, about 30 deg elevation

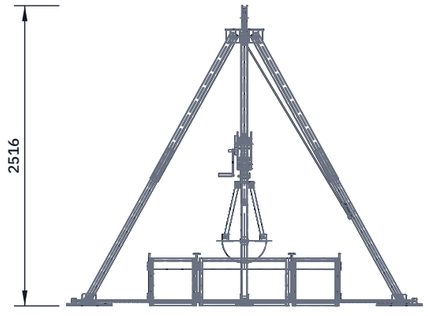

FRONT VIEW

Scale 1:50; looking at the front (along +Y)



RIGHT VIEW

Scale 1:50; looking at the right side (along -X)

KEY DIMENSIONS (MM) AND DATA

Leg pins on 220 circle at 2250; feet on 3000 circle
Legs 2585 pin to pin, 32.5 deg from vertical; adjust +/- 75
Upper 60 x 60 x 4 x 1450; lower 50 x 50 x 3 x 1500; overlap 305
Sheave 150 OD at 2413; mast top 2515; rope drops on the axis
Rope 6 mm 7x19 A4 x 15 m; winch drum 1157 down leg A
Chains 6 mm, 2598 between feet; chain lugs 140 outboard
Rim guard: 6 panels 400 high on a hexagon, 1380 across flats
SWL 150 kg; proof 1.5 x; leg buckling margin 5.5
Tips with the rope 25 deg off vertical at SWL; work within 10 deg
Tripod with winch about 75 kg; heaviest pack 24 kg
Heads pass a 560 mm opening; standard tab 10 thick, 20 hole
Material winch: never lift a person with it
PRELIMINARY, NOT FOR FABRICATION

HATCHSIDE

github.com/BoujeeEnjinia1701/hatchside

No-entry tripod over a hatch: general arrangement

DRAWING NO.	REV	SHEET	SIZE
HTS-DWG-001	P3	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:50	mm		2026-11-05	Amish Chadha

MATERIAL / NOTES

Legs 6082-T6 Al tube; head, feet, bracket S275 galvanized; A4 fasteners. See bom/bom.csv

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand