


CONCEPT, NOT FOR FABRICATION


HeatMap Node · github.com/BoujeeEnjinia1701/heatmap-node

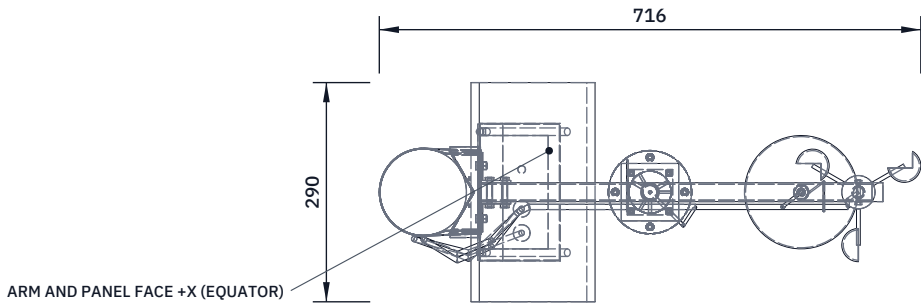

TOP VIEW


Scale 1:10; looking down (along -Z)

ELEVATIONS ABOVE PAVEMENT

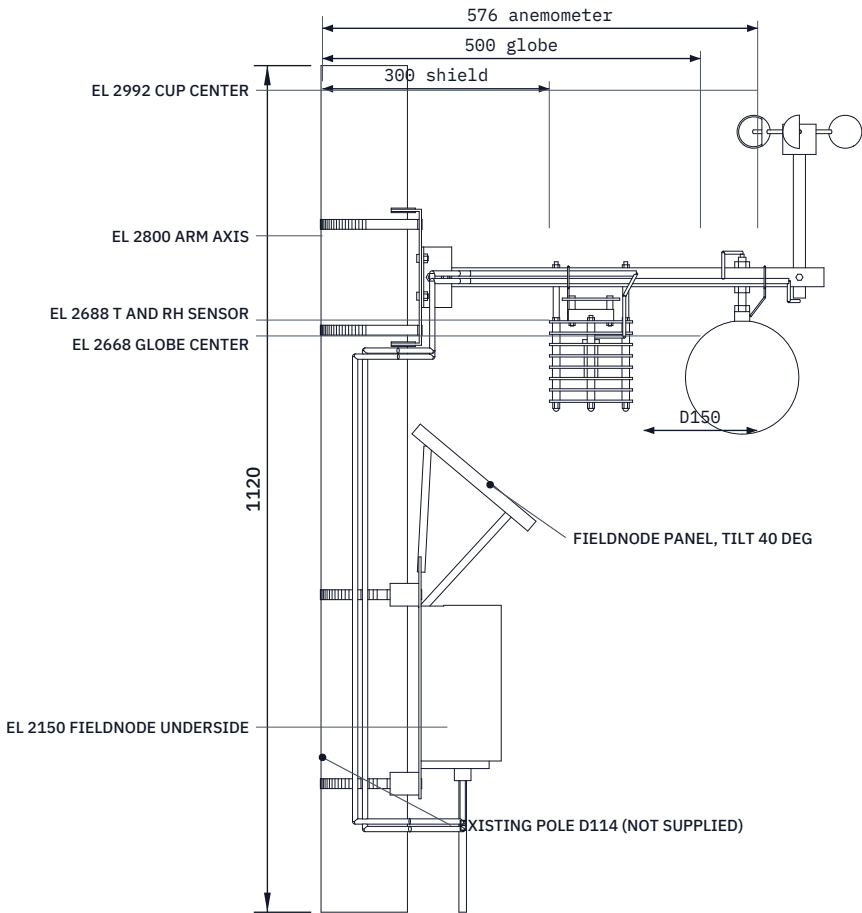


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

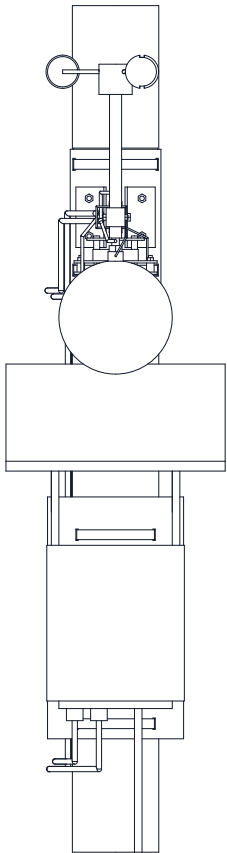

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

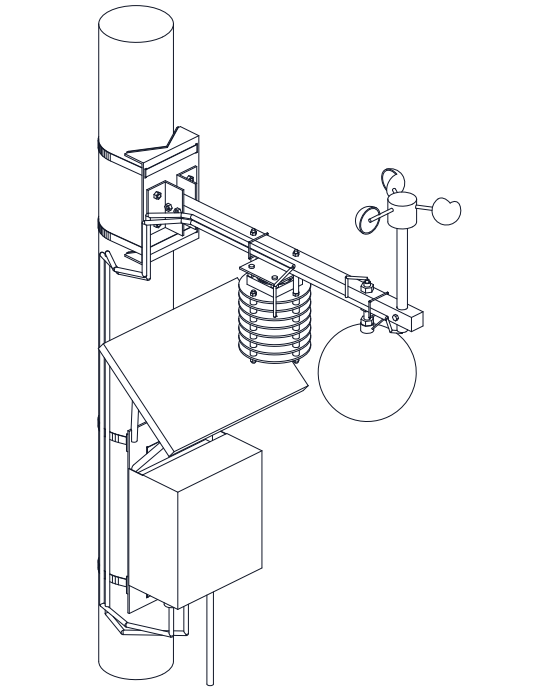

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

Pole D114.3 design case; clamps fit 60 to 200; no drilling

Arm 25 x 25 x 2 Al, 530 long, axis at 2800; reach 668

Saddle: 3 mm sheet channel 120 x 180 x 40, 120 deg V notches, cheeks

Shield 8 plates D110 at 15 pitch on 4 M5 rods

Fan 60 x 60 x 15 5 V in 76 sq cowl on the top plate

Globe D150 copper on an M10 hollow hanger tube

Anemometer mast 170 above the arm; cup circle D184

FieldNode core per FND-DWG-001 Rev P3 on printed 120 deg V adapter

Lanyards: globe and shield to arm (secondary retention)

Third-angle; front view from -Y; pole on the Z axis; +X to the equator

HEATMAP NODE

github.com/BoujeeEnjinia1701/heatmap-node

General arrangement

DRAWING NO.

HMN-DWG-001

REV

P4

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:10

UNITS

mm

PROJECTION



DATE

2026-10-01

DRAWN

Amish Chadha

MATERIAL / NOTES

Al arm and formed sheet saddle; ASA shield and cowl; copper globe; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand