

Search Little Bird

[Deals](#) [New Releases](#) [Arduino](#) [Micro:Bit](#) [Raspberry Pi](#) [Pico](#) [Adafruit](#) [SparkFun](#) [DFRobot](#) Select your delivery address

12V 4 Channel 315Mhz Wireless Remote Control Switch With 2 Transmitter [LB-LS0007]




Price: \$34.32

This product is currently unavailable for purchase

 [Secure transaction](#)

Product Image Gallery

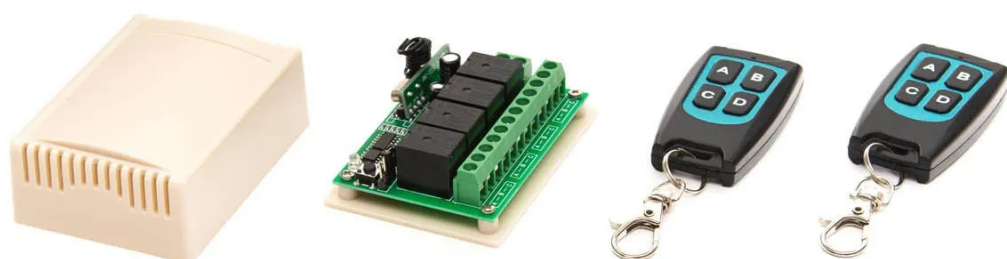

Description

It is a learning code wireless remote control switch (receiver), the output way /working way can be changed as you like, it is easy to match the transmitter. It

has 4 Relays which can make the equipment turn or reverse, on/off and so on come true. The volume is small and the performance is stable and reliable, high receive sensitivity.

1. It covers application ranging from simple domestic remote control to autonomous control, like auto door, window, lifting equipment, entrance access, up and down controller, alarm system industrial control and security etc.
2. These remote controls are designed to control a wide variety of electronic devices with a wireless signal.
3. Extremely easy to set up and use.
4. Compatible with 2262 / 2260 / 1527 / 2240 etc chip and several code wireless remote control. So it can meet someone's need of choosing the wireless remote control as they like to work with it .

Instructions:

1. Press the learning code, the indicator flash, loosen your finger, press any button of the remote control, the indicator flash 2 times and off, it means you learn it successfully .
2. It can learn more than 12 PCS 2262 or 1527 chip with the different code wireless remote control.
3. remove/clean: press the learning button about 8 seconds , the indicator turn on to off, it means the information that you keep have been removed successfully.

Output working way:

1. Self-lock: connect the JP1 with the cutting out cap.
2. Jog: the cutting-out cap is non-occupation, JP1 and JP2 do not connect either.
3. Inter-lock: Connect the Jp2 with the Cutting out cap,
Jog: press one button is ON, loosen your finger on the same button is OFF (need one channel switch and one buttons remote control).
Self -lock: press one button for one time is ON, press the same button again is OFF (need one channel switch and one buttons remote control).
Inter-lock: press one button is ON, press another button is OFF (need one channel switch and 2 buttons remote control).

Receiver:

1. Working voltage: DC12V
2. Idle current: 6mA
3. Working temperature: -40°C+80°C
4. Receiver sensitivity: < -105dBm
5. Working frequency: 315mhz


6. Max load current: 10A
7. Dimensions: 72 x 52 x 26mm


Remote control transmitter:

1. Remote Distance: ~200M
2. Operating Voltage: DC 12V
3. Frequency: 315mhz
4. Operating Current: 13 mAh
5. Code Type: Fixed code / Learning code
6. Dimensions: 58 x 39 x 14mm

Package included:

- 2 x Transmitter
- 1 x Receiver

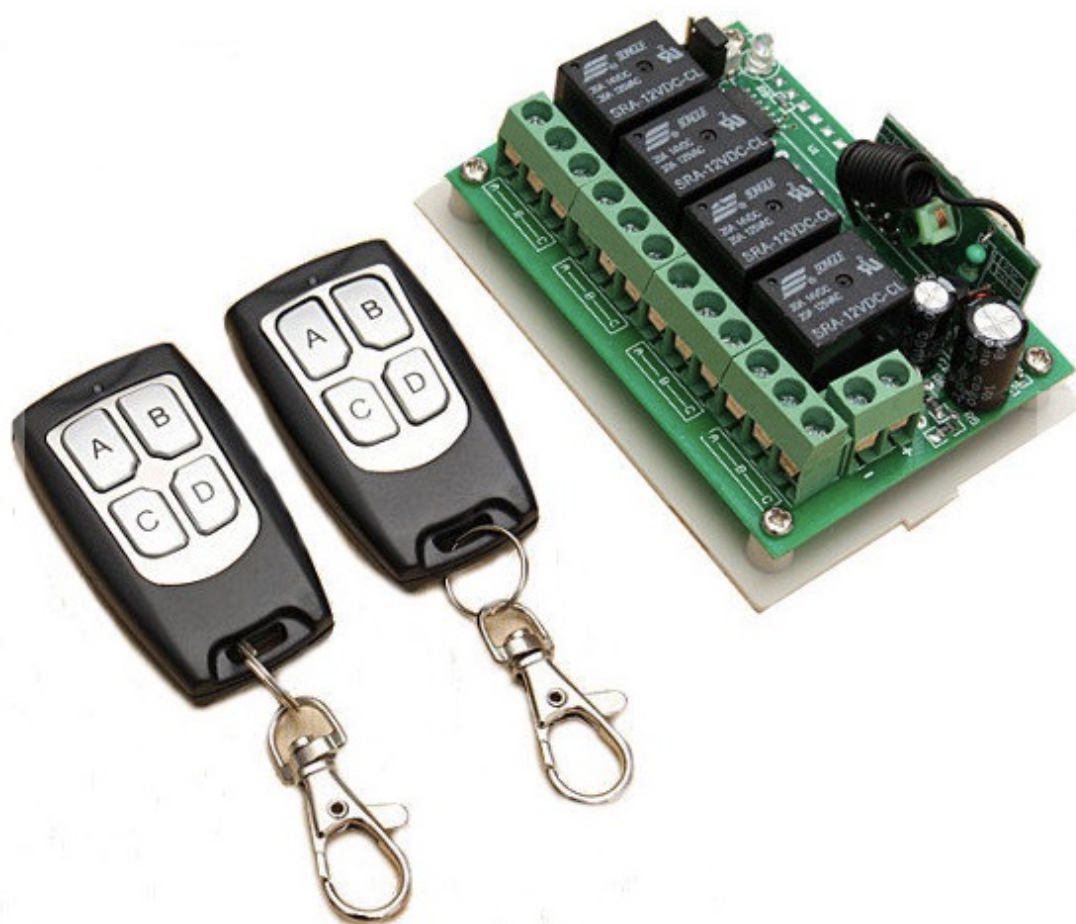

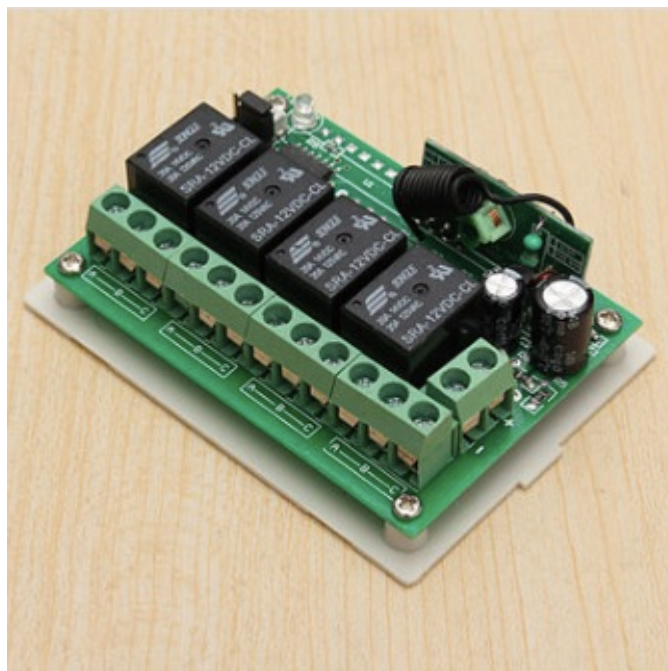

Categories with Wireless Remote Control Switch

Kits



Powered by Koi

About Us

Privacy Policy

Terms of Service



© 2023 Little Bird Electronics Pty Ltd.

Ask us about the Wireless Remote Control Switch

Made with ❤️ in SYD. All prices inc GST. ABN 15 634 521 449. We're 📌 @lbhq on Twitter.

📞 Call (1300 240 817)



✉ Email (help@littlebird.com.au)

