


CONCEPT, NOT FOR FABRICATION

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC

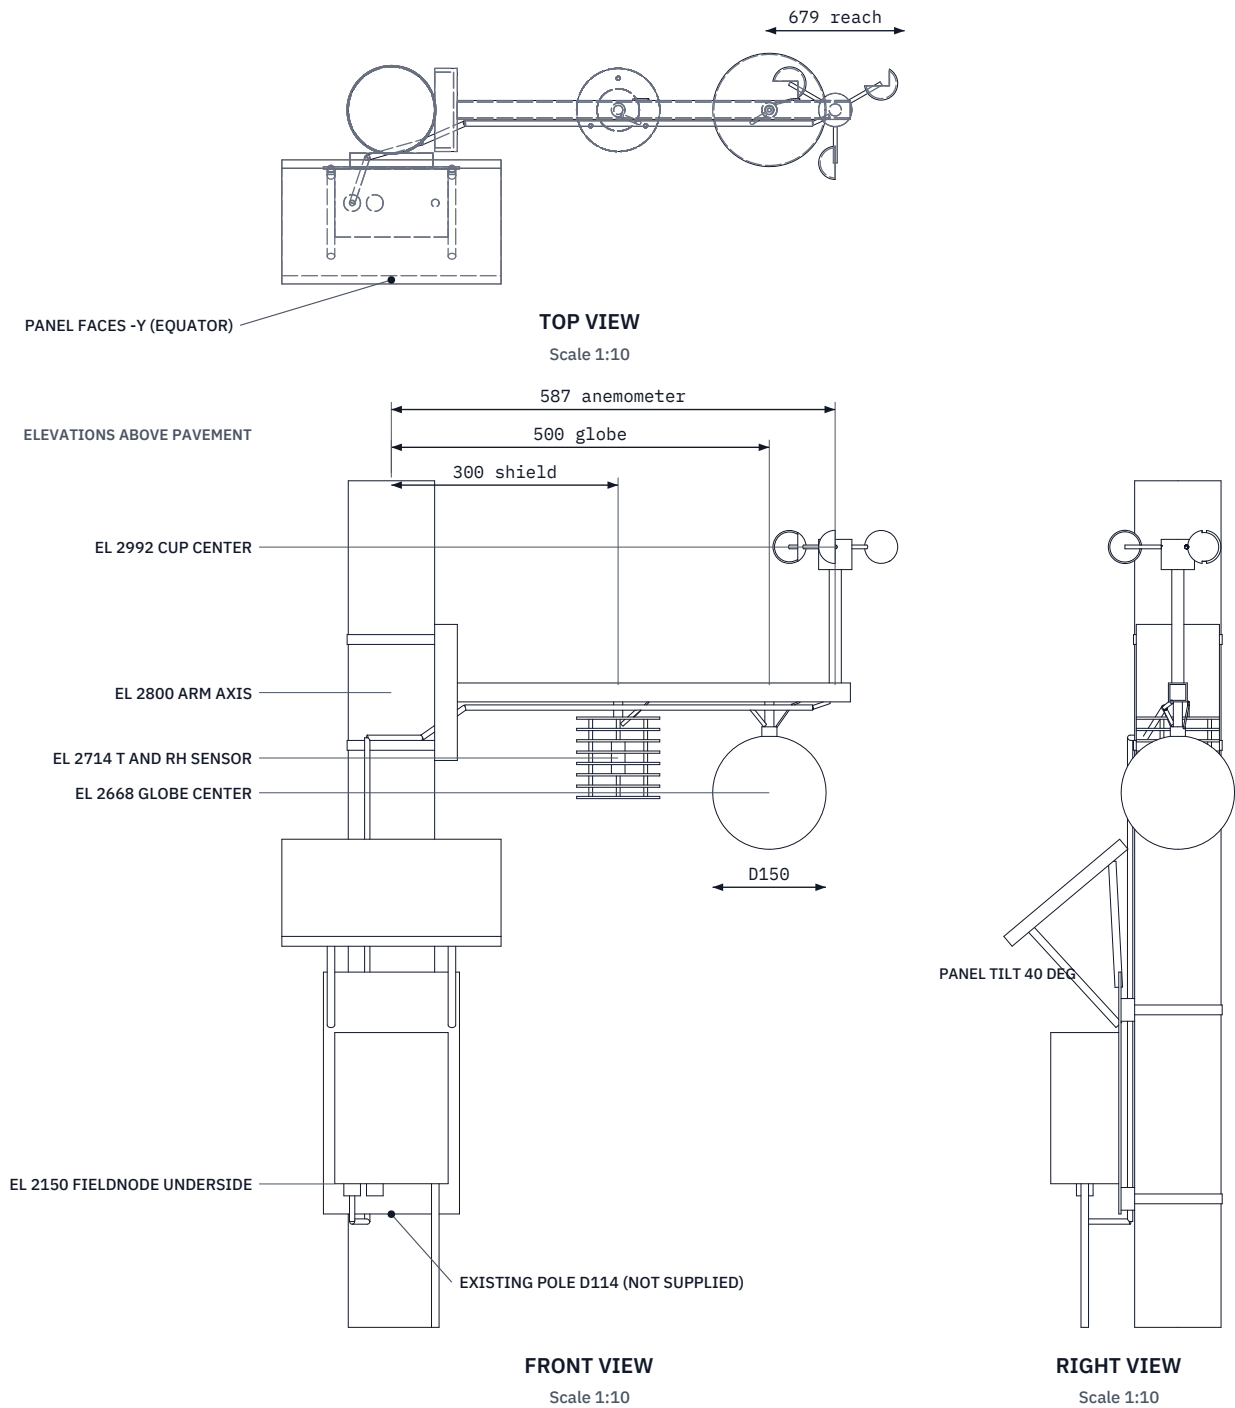

MAIN DIMENSIONS AND INTERFACES (MM)

Pole D114.3 design case; clamps fit 60 to 200; no drilling

Arm 25 x 25 x 2 Al, 520 long, axis at 2800

Saddle 120 deg V, 110 x 180 x 30; two 13 mm strap bands

Shield 8 plates D110 at 15 pitch; sensor at stack center

Globe D150 copper, matte black; NTC bead at center

Anemometer mast 170 above the arm; cup circle D184

FieldNode core per FND-DWG-001 on 120 deg V adapter

Lanyards: globe and shield to arm (secondary retention)

Third-angle; front view from -Y; pole on the Z axis

HEATMAP NODE

General arrangement

DRAWING NO. HMN-DWG-001		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-25	DRAWN Amish Chadha
MATERIAL / NOTES Aluminium arm and saddle; ASA shield; copper globe; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION				
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com			Generated from cad/src; do not edit by hand	