
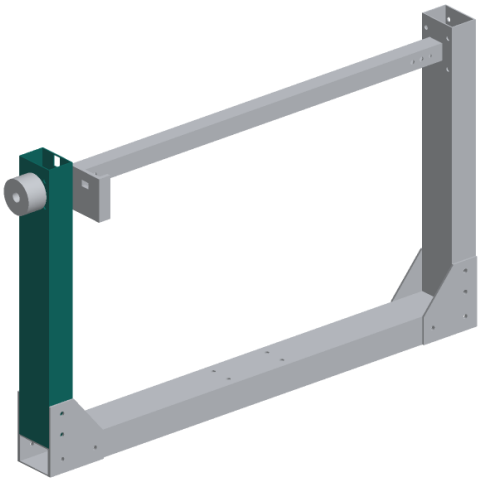
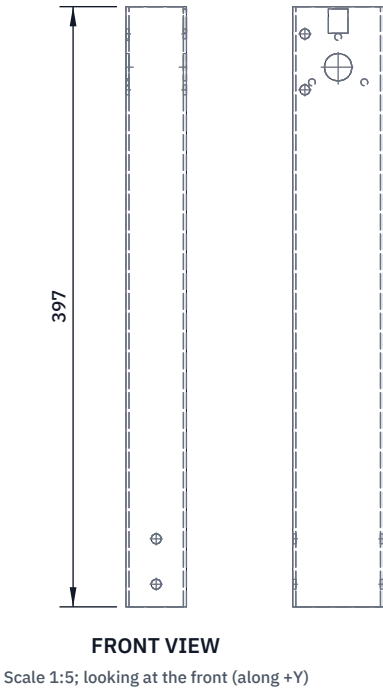


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut and drill as the right arm (HLT-DWG-106) for length, bush hole and gusset bolt holes, but without the four gearbox holes.

Spring can holes: three 4.5 mm on a 40 mm circle round the bush hole, outer side only.

Latch bracket holes: two 6.5 mm through both sides, 8 mm from the front face, 18 mm and 55 mm below the top end.

Hall switch window: 13 mm wide and 16 mm tall through the inner side only, 1.5 mm below the top end, centred across the side.

Fit: as the right arm; the latch bracket bolts to the inner side at the front, the spring can to the outer side.

Check: lay both arms side by side: bush holes and gusset holes match.

HELIOLITE				github.com/BoujeeEnjinia1701/heliolite			
HelioLite left arm (latch side): making sketch							
DRAWING NO. HLT-DWG-107			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 		DATE 2026-10-02		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminum rectangular tube 60 x 40 x 2 mm, 6063							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	