



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

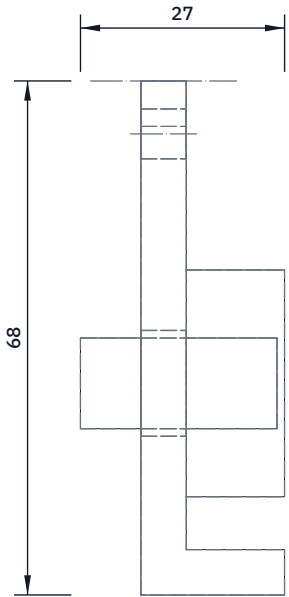


TOP VIEW

Scale 1:1; looking down (along -Z)

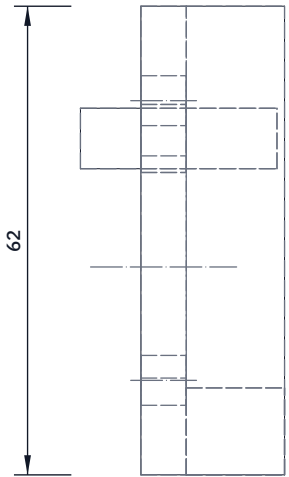


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

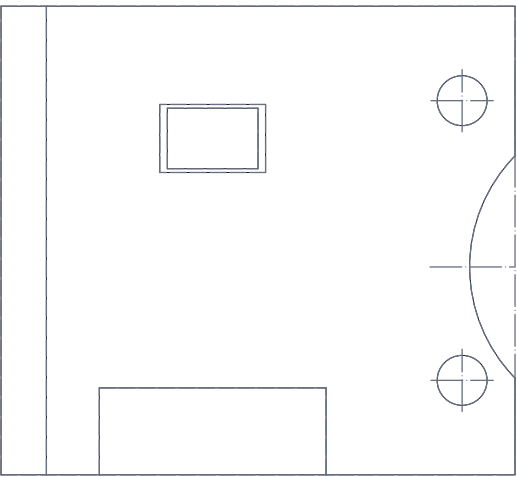

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

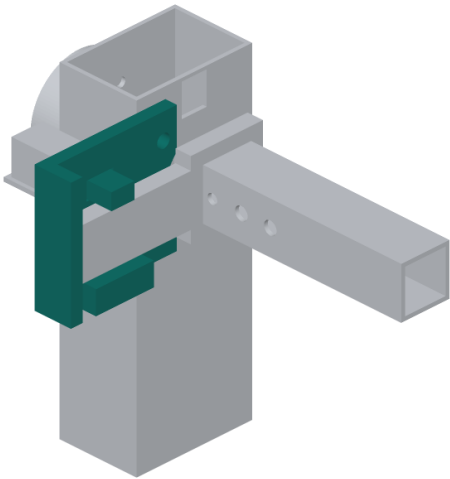

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bracket: cut 62 mm of 6 mm aluminum angle with legs of at least 70 and 20 mm. Trim the long leg to 68 mm and the short leg to 19 mm overall (13 mm clear of the long leg). No bending.

In the long leg: a 21 mm radius bite at the back edge, centred 31 mm up, clear of the turning tube end; a 14 x 9 mm slot for the pawl, 21 mm from the front edge, 40 mm up. Two 6.6 mm countersunk holes 7 mm from the back edge, 12.5 and 49.5 mm up.

Stop block: 13 x 30 x 11.5 mm aluminum bar, screwed to the leg's foot with two M5 screws; bond the 3 mm polyurethane pad on top.

Pawl: 26 mm of 12 x 8 mm steel bar; chamfer the top of its tip 45 degrees by 4 mm; tap M3 in the tail for the solenoid plunger.

Fit: long leg flat on the left arm's inner side, two M6 countersunk screws; the pawl slides in the slot over the lug.

Check: the pawl slides freely 12 mm; pad top 0.5 mm under the stowed lug.

HELIOLITE

github.com/BoujeeEnjinia1701/heliolite

HelioLite latch bracket, stop block and pawl: making sketch

DRAWING NO. HLT-DWG-110			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Aluminum angle 6 mm and bar 15 x 30 mm, 6063-T6; steel bar 12 x 8 mm (pawl)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	