


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:5; looking down (along -Z)

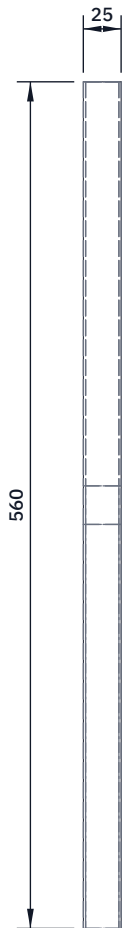

FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

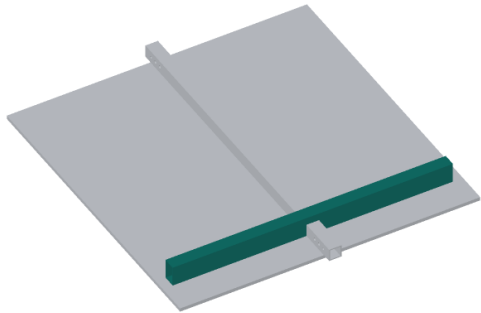

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two 560 mm lengths of 25 x 40 x 1.5 mm tube; square and deburr.

Tunnel for the torque tube, at mid-length (280 mm from each end):

a notch 25.5 mm long and 25.25 mm deep, cut from one 25 mm face (the face that goes on the panel) down through both 40 mm sides.

Saw the two sides, chain drill and file the floor flat.

Push a 25 mm tube offcut through the tunnel: it must slide, not rock.

Fit plastic end caps in both ends.

Fit: the notched face is bonded to the back of the backing panel with structural silicone, the rib centre line 227.5 mm from the panel centre line and its ends 20 mm in from the panel edges.

The torque tube runs through both tunnels and touches the panel.

Check: both tunnels line up when the ribs lie side by side.

HELIOLITE				github.com/BoujeeEnjinia1701/heliolite			
HelioLite rib tube (make 2): making sketch							
DRAWING NO. HLT-DWG-101			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminum rectangular tube 25 x 40 x 1.5 mm, 6063							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand			