




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

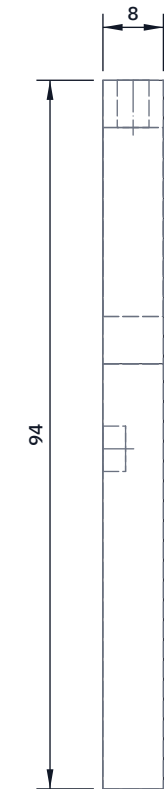


TOP VIEW
Scale 1:1; looking down (along -Z)

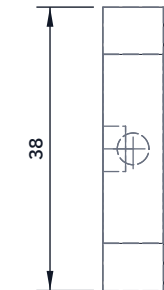

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

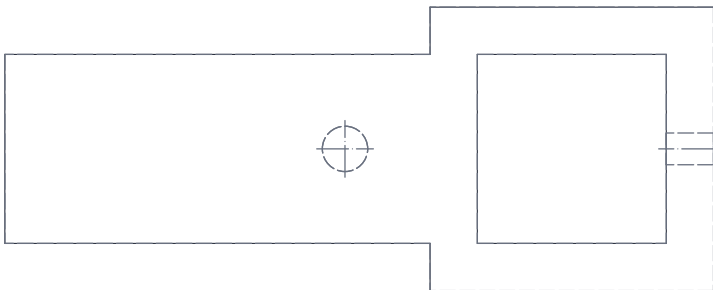

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

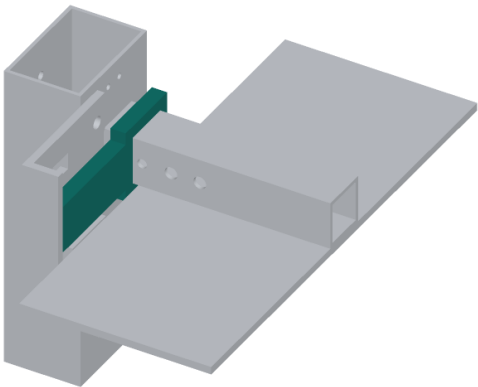

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut from 8 mm steel plate: a collar 37.5 mm square with a tongue 25 mm wide running out to 75 mm from the collar's centre.

Cut the 25 mm square hole in the collar: drill 20 mm, file square to a sliding fit on the torque tube.

Drill and tap M5 through the collar side opposite the tongue for a set screw.

On one face of the tongue, 30 mm from the centre: a 6 mm hole 3 mm deep for the homing magnet (glue it in).

Round the tongue corners 2 mm and break all edges.

Fit: slides onto the left end of the torque tube, magnet toward the arm, mid-plane 11 mm from the tube end; set screw into the spot on the tube, medium threadlocker.

When stowed, the tongue rests on the stop pad and the latch pawl closes over it.

Check: the tongue is square to the tube and does not rock.

HELIOLITE

github.com/BoujeeEnjinia1701/heliolite

HelioLite stow lug: making sketch

DRAWING NO. HLT-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel plate 8 mm, S275 or similar, painted					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand