



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

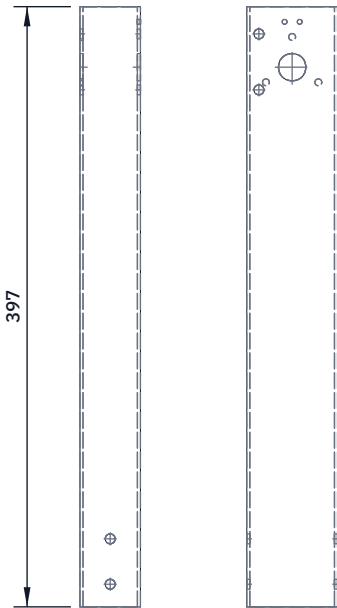


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

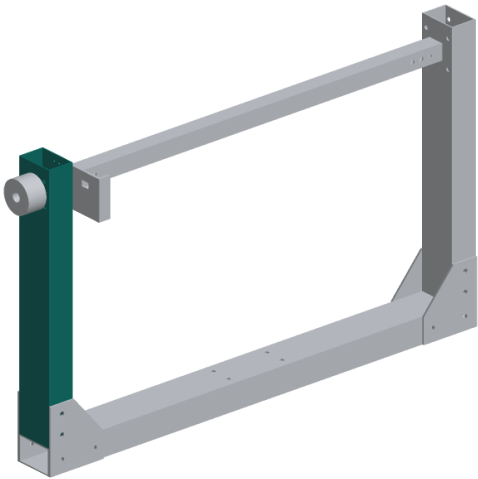

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut and drill as the right arm (HLT-DWG-106) for length, bush hole and gusset bolt holes, but without the four gearbox holes.

Spring can holes: three 4.5 mm on a 40 mm circle round the bush hole, outer side only.

Latch bracket holes: two 6.5 mm through both sides, 8 mm from the front face, 18 mm and 55 mm below the top end.

Hall switch holes: two 3.2 mm in the inner side, 10 mm below the top end, 5 mm each side of the centre line.

Fit: as the right arm; the latch bracket bolts to the inner side at the front, the spring can to the outer side.

Check: lay both arms side by side: bush holes and gusset holes match.

HELIOLITE

github.com/BoujeeEnjinia1701/heliolite

HelioLite left arm (latch side): making sketch

DRAWING NO. HLT-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminum rectangular tube 60 x 40 x 2 mm, 6063					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	