



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

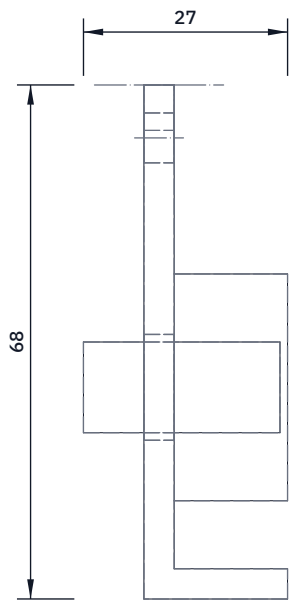


TOP VIEW

Scale 1:1; looking down (along -Z)

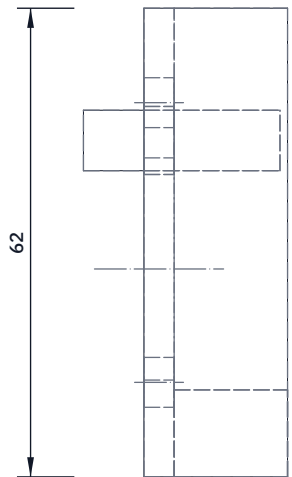


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

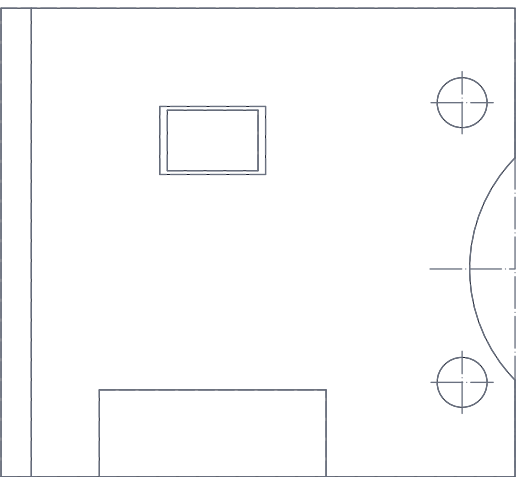

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

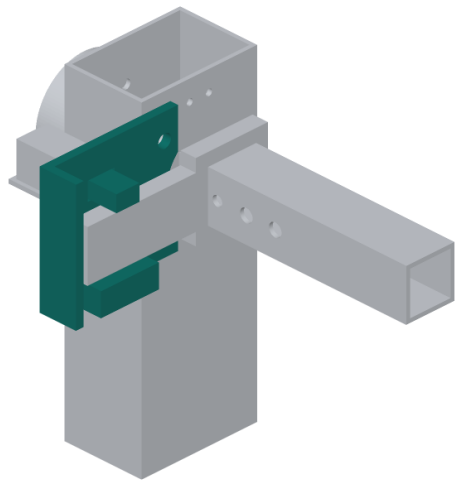

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bracket: from 4 mm steel cut a leg 68 x 62 mm with a 15 mm flange on its front edge; bend the flange 90 degrees.

In the leg: a 21 mm radius bite at the back edge, centred 31 mm up, clear of the turning tube end; a 14 x 9 mm slot for the pawl, 21 mm from the front edge, 40 mm up. Two 6.6 mm countersunk holes 7 mm from the back edge, 12.5 and 49.5 mm up.

Stop block: 15 x 30 x 11.5 mm steel, screwed to the leg's foot with two M5 screws; bond the 3 mm polyurethane pad on top.

Pawl: 26 mm of 12 x 8 mm steel bar; chamfer the top of its tip 45 degrees by 4 mm; tap M3 in the tail for the solenoid plunger.

Fit: leg flat on the left arm's inner side, two M6 countersunk screws; the pawl slides in the slot, its tip over the lug.

Check: the pawl slides freely 12 mm; pad top 0.5 mm under the stowed lug.

HELIOLITE

github.com/BoujeeEnjinia1701/heliolite

HelioLite latch bracket, stop block and pawl: making sketch

DRAWING NO. HLT-DWG-110			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel plate 4 mm and bar 15 x 30 mm, 12 x 8 mm; painted					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand