

PHYSICS

FINAL PAPER


By **THUNDERSTUDY**

**70% SAME
PAPER**
FREE

By Pragya & Aashi Shrivastava

A Visual Guide to Electric Charge & Fields

@ThunderStudy




An intrinsic property from electron transfer, exerting electrostatic forces.



Quantization: $Q = ne$

$$e = 1.6 \times 10^{-19} \text{ C}$$

(Total charge =, total charge as integer multiple)



Conservation

Charge can neither be created nor destroyed.

Fundamental Interactions

Like charges repel, opposite charges attract.

The value of an electric charge does not change with the speed of the body.

1. The Basics of Electric Charge

Electron Transfer



Three Methods of Charging




Friction


Conduction

Induction

Invariance




Graph of Force vs. $1/r^2$



Larger $|q_1q_2|$ = Steeper slope

2. Coulomb's Law: The Force Between Charges

Quantifies electrostatic force between stationary point charges.

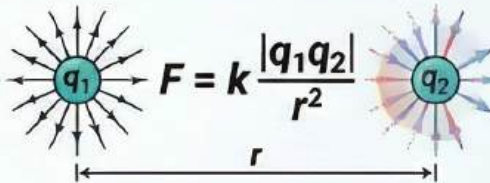

$$F = k \frac{|q_1q_2|}{r^2}$$


Quantifies electrostatic force between stationary point charges.

$$k = 9 \times 10^9 \text{ Nm}^2/\text{C}^2$$

Limitations


- ✓ Point charges
- ✓ Charges at rest
- ✓ Distance > nuclear size

Graph of Force vs. $1/r^2$



Larger $|q_1q_2|$ = Steeper slope

4. Electric Dipoles



Torque on a Dipole:

$$\tau = pE \sin \theta$$

Torque is maximum at 90° and zero at 0° & 180° .

Field on Axial Point:

$$E = \frac{1}{4\pi\epsilon_0} \cdot \frac{2p}{r^3}$$

(stronger, same direction as p)

Field on Equatorial Point:

$$E = \frac{1}{4\pi\epsilon_0} \cdot \frac{p}{r^3}$$

(weaker, opposite direction to p)

Potential Energy:

$$U = -pE \cos \theta$$


● Min ($-pE$, 0° , stable)

● Max ($+pE$, 180° , unstable)

3. The Electric Field & Field Lines

What is an Electric Field?

The region around a charge where another charge experiences an electrostatic force.

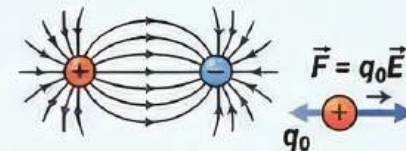

Torque on a Dipole:

$$\tau = pE \sin \theta$$

Turning force, max at 90° , zero at 0° & 180°

Properties of Electric Field Lines

- ✓ Imaginary
- ✓ Start +ve, end -ve
- ✓ Never intersect
- ✓ No closed loops
- ✓ Perpendicular to conductor surface

Potential Energy:

$$U = -pE \cos \theta$$


Min ($-pE$, 0° , stable) Max ($+pE$, 180° , unstable)

5. Electric Flux & Gauss's Law

What is Electric Flux (Φ)?

Total electric field lines passing perpendicularly through a surface.

$$\Phi = E \cdot A = EA \cos \theta$$




$$\text{Gauss's Law: } \Phi_{\text{closed}} = \frac{q_{\text{enclosed}}}{\epsilon_0}$$

Charge Distribution	Formula for Electric Field (E)	Key Characteristic
Infinitely Long Wire	$\frac{\lambda}{2\pi\epsilon_0 r}$	E is inversely proportional to distance (r).
Infinite Plane Sheet	$\frac{\sigma}{2\epsilon_0}$	E is constant and independent of distance.
Charged Spherical Shell	Outside: $\frac{kQ}{r^2}$ On Surface: $\frac{kQ}{R^2}$ Inside: 0	Field is zero inside, maximum on surface, decreases outside.

Mastering Electric Potential & Capacitance: A Visual Revision Guide


Fundamentals of Electric Potential (V)

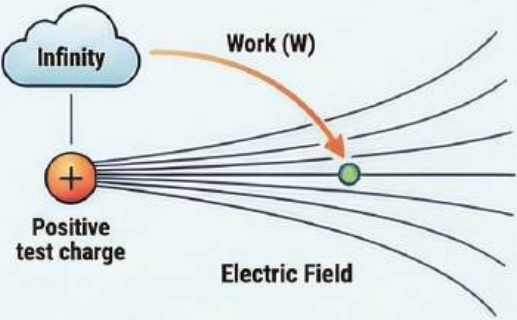


$$V = \frac{W}{q_0}$$

1 Volt
1 Joule of work per 1 Coulomb



Potential and Electric Field Direction

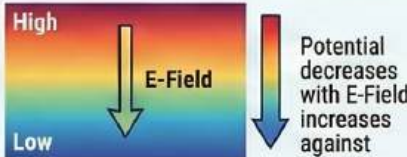

Potential Difference Determines Charge Flow








Equipotential Surfaces & Conductors

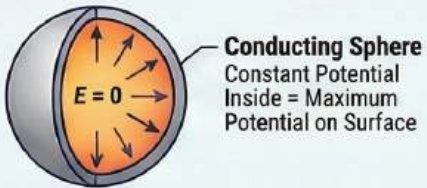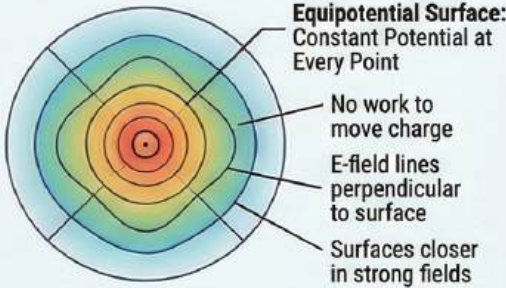

@ThunderStudy

Potential Calculations & Key Formulas

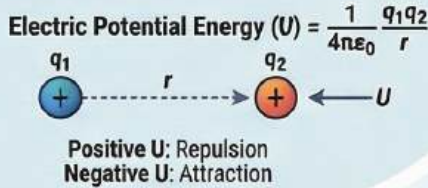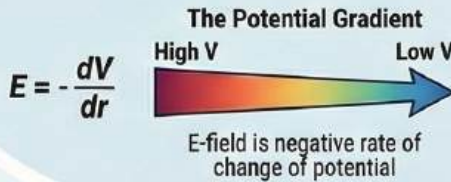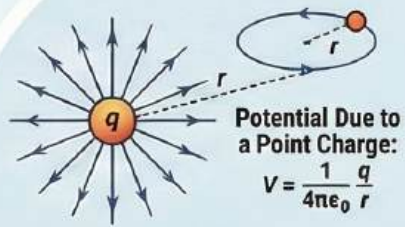

Capacitors and Capacitance

What is a Capacitor?

Device to store electrical energy. Capacitance (C) is ability to store.


$$C = \frac{Q}{V}$$

Farad (F)


Depends on Geometry (A, d) and Medium

Not on Q or V


$$C = \frac{\epsilon_0 A}{d}$$

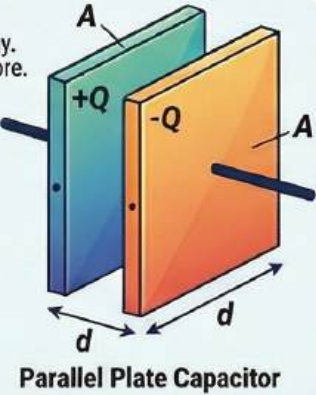


Energy Stored in a Capacitor



Series Combination



Parallel Combination




Combining Capacitors & The Effect of Dielectrics

	Dielectric (Constant K)	
	Battery is Disconnected	Battery Remains Connected
Charge (Q)	Stays Constant (Q_0)	Increases by K ($K \cdot Q_0$)
Electric Field (E)	Decreases by K ($\frac{E_0}{K}$)	Stays Constant (E_0)
Potential (V)	Decreases by K ($\frac{V_0}{K}$)	Stays Constant (V_0)
Capacitance (C)	Increases by K ($K \cdot C_0$)	Increases by K ($K \cdot C_0$)
Energy (U)	Decreases by K ($\frac{U_0}{K}$)	Increases by K ($K \cdot U_0$)

Made By Dr Pragya


Current Electricity: A Visual Revision

Fundamentals of Electric Current

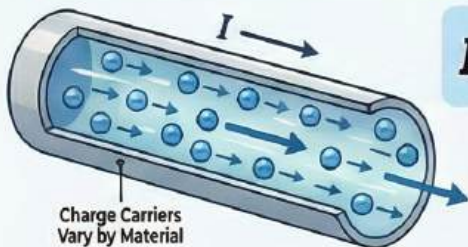

$$I = \frac{q}{t}$$

What is Electric Current?
Rate of flow of electric charge through a cross-section of a conductor.
Unit: Ampere (A) = Coulomb/second (C/s)




Current is a Scalar Quantity

Adds algebraically, not vectorially.
Direction is direction of positive charge flow.

Current Density (J)

$$J = \frac{I}{A}$$

The Microscopic View of Conduction

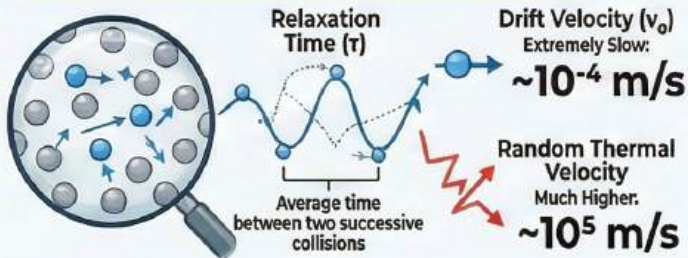


Higher Temperature = Shorter Relaxation Time (τ)
↑ Temp → ↑ Kinetic Energy
→ ↑ Collisions →
↓ Time between collisions.

Mobility (μ)
Measure of how quickly an electron can move.

$$\mu = \frac{v_d}{E}$$

Ohm's Law, Resistance & Resistivity

Ohm's Law
Current (I) is directly proportional to Potential Difference (V) (provided physical conditions constant).



$$V = IR$$

Resistance (R)
Obstruction to current flow from collisions.
Unit: Ohm (Ω)

Stretching vs. Adding Length

Adding Length: Length doubled = Resistance doubled

Stretching: Length doubled = Resistance becomes FOUR times larger (n² times)

Factors Affecting Resistance

$$R = \rho \left(\frac{L}{A} \right)$$

Directly proportional to Length (L)
Inversely proportional to Cross-sectional Area (A)

Resistivity (ρ)
Resistivity is a property of the material itself.


How Temperature Affects Resistance

Conductors (Metals)
↑ Temp →
→ ↑ Kinetic Energy →
→ ↑ Collisions →
→ ↓ Relaxation Time (τ)
→ ↑ Resistance.

Alloys
Resistance increases slightly with temperature, but resistivity is very high.

Semiconductors & Electrolytes
↑ Temp →
→ Decreases resistivity and resistance
→ Better conductivity.

Cells: EMF & Internal Resistance



Electromotive Force (EMF or E)
Max potential difference when no current is drawn (open circuit)

Internal Resistance (r)
Resistance offered by electrolyte and electrodes to ion flow.

Factors Affecting Internal Resistance (r)

- ↑ Electrolyte Concentration
- ↑ Electrode Separation
- ↓ Temperature
- ↓ Larger Immersed Electrode Area

Discharging vs. Charging a Cell

Discharging: EMF > Terminal Voltage (V)
Charging: Terminal Voltage (V) > EMF

Complete Circuit Current

$$I = \frac{E}{R + r}$$

Essential Circuit Analysis Tools


Kirchhoff's First Law (Junction Rule)



$$\sum I = 0$$

Algebraic sum of currents entering a junction is zero. Based on conservation of charge.

Kirchhoff's Second Law (Loop Rule)



$$\sum \Delta V = 0$$

Algebraic sum of changes in potential around any closed circuit loop is zero. Based on conservation of energy.

Wheatstone Bridge

A circuit with four resistors used to measure an unknown resistance accurately.




Balanced Condition

The bridge is balanced when no current flows through the central galvanometer.

Moving Charges & Magnetism: A Visual Revision

FUNDAMENTAL CONCEPTS



Electric Current Creates a Magnetic Field


Oersted discovery: current-carrying conductor is surrounded by a magnetic field. (Magnetic effect of current)



Right-Hand Thumb Rule



Stationary Charge: Electric Field Only




Moving Charge: Electric & Magnetic Fields



Current Conductor: Magnetic Field Only (No Net Charge)

FORCE ON A MOVING CHARGE (LORENTZ FORCE)



$$F = qvB\sin\theta$$

(or $F = q(\mathbf{v} \times \mathbf{B})$)

Force is Zero:

$$v=0$$

$$F=0$$

$$\theta=0^\circ$$

$$F=0$$


$$\theta=180^\circ$$

$$F=0$$

Maximum Force Condition:


$$\theta=90^\circ$$

$$F = qvB$$

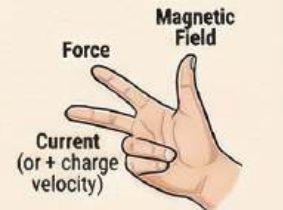

Fleming's Left-Hand Rule

MOTION OF A CHARGE IN A MAGNETIC FIELD




Path 1: Perpendicular Entry ($\theta=90^\circ$)

Follows a circular path. Speed & KE constant, velocity changes.

$$\text{Radius } (r) = \frac{mv}{qB}$$

$$\text{Time Period } (T) = \frac{2\pi m}{qB}$$



Path 2: Entry at an Angle (θ)

Helical path. $v \cdot \sin\theta$ causes circular motion, $v \cdot \cos\theta$ causes linear motion.

$$\text{Radius } (r) = \frac{mv \cdot \sin\theta}{qB}$$


$$\text{Time Period } (T) = \frac{2\pi m}{qB}$$

(Independent of velocity!)

$$\text{Pitch } (P) = (v \cdot \cos\theta) \cdot T$$


CALCULATING MAGNETIC FIELDS: KEY LAWS

Biot-Savart Law



$$dB = \frac{\mu_0}{4\pi} \frac{Idl \cdot \sin\theta}{r^2}$$


Ampere's Circuital Law



$$\oint \vec{B} \cdot d\vec{l} = \mu_0 \cdot I_{\text{enclosed}}$$


APPLICATIONS & DEVICES

Field at the Center of a Coil




$$B = \frac{\mu_0 NI}{2r}$$

Force Between Parallel Wires




$$\frac{F}{L} = \frac{\mu_0 \cdot I_1 \cdot I_2}{2\pi d}$$

Solenoid



$$B = \mu_0 nI, \quad n = \frac{\text{turns}}{\text{length}}$$

Torque on a Current Loop




$$\tau = NIAB \cdot \sin\theta$$

($M = NIA$, magnetic moment)


CONVERTING A GALVANOMETER

To create an **Ammeter**



Connect low resistance (S) in parallel to divert most current.

To create a **Voltmeter**



Connect high resistance (R) in series to limit current flow.

Magnetism & Matter: A Visual Revision Guide

1. The Fundamentals of a Magnet




What is a Magnet?

Any substance that can create its own magnetic field and exert a force on other magnetic materials like iron and steel.


Directive Property



Pole Interaction




Pole Interaction



Monopoles Do Not Exist




2. The Bar Magnet as a Dipole



An Analogy to the Electric Dipole

North Pole is analogous to a positive charge, and the South Pole to a negative charge.

Magnetic Dipole Moment



$$M = m \times 2l$$

(where 'm' is pole strength and '2l' is magnetic length).


Key Formulas: Electric vs. Magnetic

Concept	Electric Dipole	Magnetic Dipole
Torque	$\tau = pE \sin(\theta)$	$\tau = MB \sin(\theta)$
Potential Energy	$U = -pE \cos(\theta)$	$U = -MB \cos(\theta)$
Work Done (Rotation)	$W = pE(\cos\theta_1 - \cos\theta_2)$	$W = MB(\cos\theta_1 - \cos\theta_2)$
Axial Field	$E = k \frac{2p}{r^3}$	$B = \frac{\mu_0}{4\pi} \frac{2M}{r^3}$
Equatorial Field	$E = k \frac{p}{r^3}$	$B = \frac{\mu_0}{4\pi} \frac{M}{r^3}$

3. Magnetic Fields & Gauss's Law

Magnetic Field Lines Form Closed Loops

They travel from N to S outside and S to N inside, completing a full loop. They never terminate.

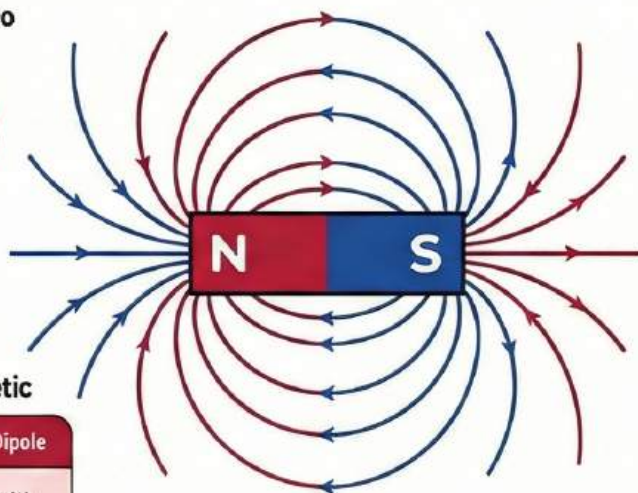

Field Lines Never Intersect



If they did, it would mean two possible directions for the magnetic force at a single point, which is impossible.

Gauss's Law for Magnetism



Gauss's Law for Magnetism

The net magnetic flux through any closed surface is always zero. For every field line exiting, another must enter.

4. How Materials Respond to Magnetism



Intensity of Magnetization (I or M)

Net magnetic dipole moment developed per unit volume of a material in a magnetic field.

Unit: A/m.



Magnetizing Intensity (H)

Strength of external magnetic field's ability to magnetize a material.

Unit: A/m.



Magnetic Susceptibility (χ)

Measure of how easily a material can be magnetized.

$$\chi = I / H$$

Unitless.




Relative Permeability (μ_r)

Compares material's permeability to free space. Indicates ability to concentrate field lines.

$$\mu_r = 1 + \chi$$

Unitless.


5. Classification of Magnetic Materials

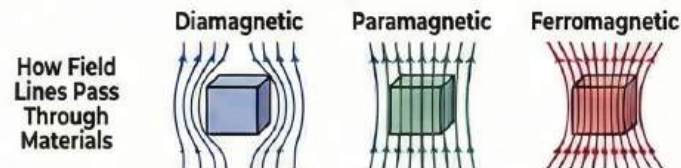

How Field Lines Pass Through Materials

Property	Diamagnetic	Paramagnetic	Ferromagnetic
Interaction	Weakly repelled	Weakly attracted	Strongly attracted
Examples	Copper, Gold, Bismuth	Aluminum, Calcium, Oxygen	Iron, Nickel, Cobalt, Steel
Susceptibility (χ)	Small & Negative	Small & Positive	Large & Positive (>1)
Rel. Permeability (μ_r)	Slightly less than 1 ($0 < \mu_r < 1$)	Slightly greater than 1	Much greater than 1 ($\mu_r \gg 1$)
Effect of Temperature	Independent	Inversely proportional	Decreases, vanishes above Curie Temperature
Motion in Field	Moves from stronger to weaker parts	Moves from weaker to stronger parts	Moves rapidly from weaker to stronger parts

A Quick Guide to Electromagnetic Induction

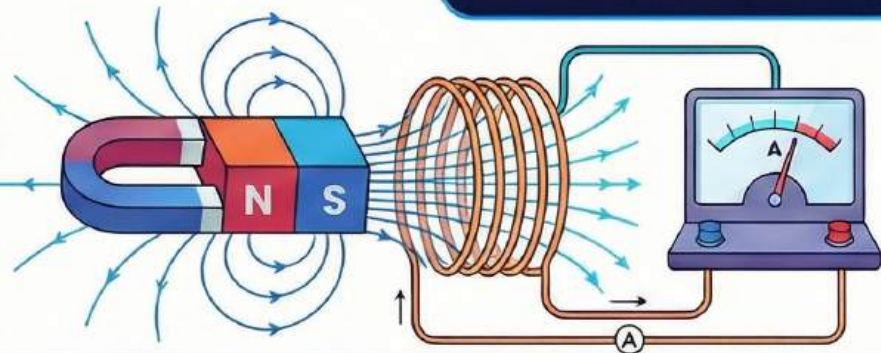

THE FOUNDATIONS OF EMI


What is Electromagnetic Induction?

The process of producing an electric current (or EMF) in a coil by varying the magnetic field linked with it.



Discovered by Michael Faraday

Faraday demonstrated that moving a magnet near a coil, or vice-versa, caused a galvanometer to show a deflection, indicating a current.



@ThunderStudy

The Role of Magnetic Flux (Φ)

Magnetic flux is the measure of the total magnetic field lines passing through a given area. EMI occurs only when this flux changes.

Faraday's First Law



Whenever the magnetic flux linked with a coil changes, an EMF is induced in the coil. This EMF lasts as long as the change in flux continues.

Faraday's Second Law



The magnitude of the induced EMF is directly proportional to the rate of change of the magnetic flux. Faster change = more EMF.

FARADAY'S & LENZ'S LAWS

$$e = - \frac{d\Phi}{dt}$$

The induced EMF (e) equals the rate of change of magnetic flux ($d\Phi/dt$). The negative sign is explained by Lenz's Law.

Lenz's Law: The Law of Opposition

The direction of the induced current is always such that it opposes the very change in magnetic flux that produced it.

North Pole Approaching Coil




The coil's near face becomes a North pole to repel the magnet. This is achieved by an anti-clockwise current flow.

North Pole Moving Away



The coil's near face becomes a South pole to attract the magnet. This is achieved by a clockwise current flow.

Motional EMF




$$e = Bvl$$

B = magnetic field, v = velocity, l = length

KEY PHENOMENA & FORMULAS

Self-Induction



Self-Inductance of a Solenoid:

$$L = \mu_0 n^2 A l$$

Self-Inductance of a Solenoid

L = coefficient of self-inductance
 n = turn density
 A = area, l = length

This is why sparks can occur when a circuit is suddenly broken.

Mutual Induction



$$M = \mu_0 n_1 n_2 A l$$

The phenomenon where a changing current in one coil (primary) induces an EMF in a neighboring coil (secondary).

M


' M ' is the coefficient of mutual inductance, dependent on the properties of both coils.

AC Generator

A device that converts mechanical energy into alternating electrical energy based on the principle of electromagnetic induction.

How it Works

A coil is rotated within a uniform magnetic field. As it rotates, the magnetic flux through it changes continuously, inducing an alternating current.

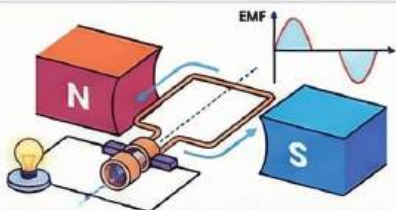


APPLICATIONS OF EMI

Induced EMF in an AC Generator:


$$e = NBA\omega \sin(\omega t)$$

The EMF (e) varies sinusoidally with time.
The peak EMF is $e_0 = NBA\omega$.

Fleming's Right-Hand Rule



EMF in a Rotating Rod



Rotating Rod EMF:

$$e = \frac{1}{2} B\omega L^2$$

B = magnetic field
 ω = angular velocity
 L = length of the rod

ALTERNATING CURRENT: A VISUAL REVISION GUIDE


@ThunderStudy

AC vs. DC: THE FUNDAMENTALS

Direct Current (DC)


Flows in one direction.

In DC, the magnitude and direction of current are constant, meaning electrons flow steadily in a single direction.




Alternating Current (AC)

Periodically reverses direction. In AC, electrons oscillate back and forth. The magnitude changes continuously, while the direction reverses after a fixed time interval.



Frequency in India is 50 Hz for AC. This means one, the frequency of DC is always 0 Hz.

UNDERSTANDING AC VALUES: PEAK vs. RMS

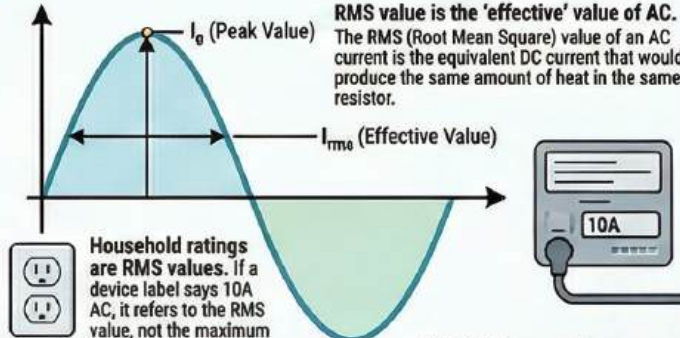


Relating RMS and Peak Values:

$$I_{rms} = \frac{I_0}{\sqrt{2}}$$

220V AC is more dangerous than 220V DC. A 220V DC shock is constant at 220V. For 220V AC (which is the RMS value), the peak voltage reaches $220V \times \sqrt{2} = 311V$, delivering a more severe shock.

KEY AVERAGES & DERIVATIONS



Average current over a full cycle is ZERO.

The positive half-cycle cancels out the negative half-cycle, resulting in a net average value of zero.

This is why AC doesn't produce a chemical effect.


Average current over a half cycle is not zero.

$$\text{Formula: } I_{avg} = 0$$

The total charge transferred over one complete cycle is zero.

ESSENTIAL AC DEVICES & CIRCUITS

LCR CIRCUIT & IMPEDANCE

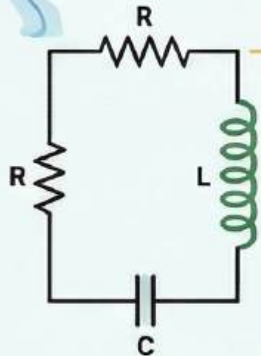

In a series circuit with a resistor (R), inductor (L), and capacitor (C), the total opposition to current is called impedance (Z).


$$Z = \sqrt{R^2 + (X_L - X_C)^2}$$

Electrical Resonance: Resonance occurs when the circuit's impedance is at its minimum ($Z=R$), allowing maximum current to flow. This happens when inductive reactance (X_L) equals capacitive reactance (X_C).

CHOKE COIL

Controls current efficiently.



A choke coil is an inductor used to control AC with minimal power loss, as it opposes current via self-induction rather than dissipating energy as heat like a resistor.




TRANSFORMER

Changes AC voltage levels.

Working on the principle of mutual induction, a transformer can increase (step-up) or decrease (step-down) AC voltage. It does not work with DC.



Step-Up: $N_s > N_p$
Voltage Increase




Step-Down: $N_s < N_p$
Voltage Decrease

Transformers conserve power. In an ideal transformer, input power equals output power ($V_p I_p = V_s I_s$).

AC GENERATOR

Converts mechanical to electrical energy.

Based on the principle of electromagnetic induction, it generates AC by rotating a coil in a magnetic field, which continuously changes the magnetic flux.

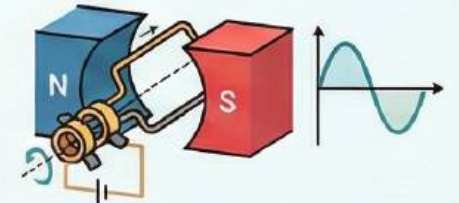


How it Works: As the coil rotates, the direction of the induced current (determined by Fleming's Right-Hand Rule) reverses every half rotation, creating alternating current.

A Visual Guide to Electromagnetic Waves

@ThunderStudy


The Birth of an EM Wave



Changing Electric field Capacitor

The Missing Link: Displacement Current (Maxwell)
Discovered by Maxwell, this is the current produced by a changing electric field.

Changing Fields Create Each Other

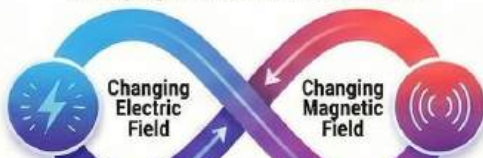


The Self-Perpetuating Cycle

A changing E-field creates a changing B-field, which in turn creates a new changing E-field. This cycle propagates through space, independent of the original source, turning on EM wave.

Core Properties of EM Waves

Transverse in Nature
The electric and magnetic fields oscillate perpendicular to each other and to the direction the wave is traveling.



No Medium Required
Unlike sound, EM waves can travel through the vacuum of space.



Travel at the Speed of Light
In a vacuum all EM waves travel at a constant speed, $c = 3 \times 10^8$ m/s.



Electrically Neutral
They have an energy and are therefore not deflected by electric or magnetic fields.



Carry Energy & Momentum
EM waves transport energy and exert a force, known as radiation pressure, on a surface.
Momentum (p) = Energy (U) / c



Maxwell's 4 Unifying Equations

1. Gauss's Law for Electricity



$$\oint \vec{E} \cdot d\vec{A} = \frac{Q_{enc}}{\epsilon_0}$$

Defines the net electric flux through a closed surface in the gaseous electric field, it confirms that single electric charges (monopoles) exist.

2. Gauss's Law for Magnetism



$$\oint \vec{B} \cdot d\vec{A} = 0$$

States that the net magnetic flux through any closed surface is zero. This implies that magnetic monopoles (isolated North or South poles) do not exist.

3. Faraday's Law of Induction



$$\oint \vec{E} \cdot d\vec{l} = -\frac{d\Phi_B}{dt}$$

A changing magnetic flux induces an electric field. This is the principle behind electric generators.

4. Ampere-Maxwell Law (Modified)



$$\oint \vec{B} \cdot d\vec{l} = \mu_0 (I_c + \epsilon_0 \frac{d\Phi_E}{dt})$$

A magnetic field is generated by both a current in a wire (conduction current) and by a changing electric field (displacement current).

Everyday Physics: EM Waves in Action



Why do welders wear special glasses?

To protect their eyes from the intense ultraviolet (UV) radiation produced by the welding arc, which can cause serious eye damage.



How do microwaves heat food?

The oven produces microwaves at the resonant frequency of water molecules. This causes the water in the food to vibrate rapidly, generating heat.



Why do radio signals bend around buildings but light doesn't?

Diffraction (bending) occurs when a wave's wavelength is comparable to the size of an obstacle. Radio waves have long wavelengths (meters) similar to buildings, while light's wavelength is microscopic.

The Electromagnetic Spectrum

The Inverse Relationship:

Highest Frequency / Shortest Wavelength

As you move from Gamma rays to Radio waves across the spectrum, frequency and energy decrease, while wavelength increases.

Lowest Frequency / Longest Wavelength



Gamma Rays

Source:

Source: Radioactive Decay

Uses: Cancer therapy, sterilizing medical equipment, detecting cracks in engines



X-Rays

Source:

Fast-moving electrons hitting a metal target

Medical imaging (bone fractures), airport security scanners



Ultraviolet (UV)

Source:

The Sun, special lamps

Sterilization, food preservation, detecting forged currency, treating skin conditions



Visible Light

Source:

The Sun, light bulbs

Vision, photography, fiber optics



Infrared (IR)

Source:

Hot bodies, molecular vibrations

Thermal imaging, remote controls, physical therapy (heat lamps), night vision



Microwaves

Source:

Magnetron tubes

Microwave ovens, radar systems, telecommunications, Wi-Fi



Radio Waves

Source:

Oscillating electronic circuits

Radio broadcasting, television signals, remote-controlled toys, MRI

Made By Dr Pragya

Ray Optics: A Visual Guide to Light


@ThunderStudy

1. Fundamentals of Light

What is Optics?

The branch of physics that studies the behavior and properties of light, and the construction of instruments that use or detect it.

Laws of Reflection




1. The angle of incidence (i) equals the angle of reflection (r).
2. The incident ray, reflected ray, and the normal all lie in the same plane.

Reflection vs. Refraction

Bouncing back of light from a surface

Bending of light as it passes from one medium to another



1. The incident ray, reflected ray, and the normal all lie in the same plane.
2. Snell's Law: The ratio $\sin(i)/\sin(r)$ is a constant, known as the refractive index (μ).

2. Mirrors & Images

Real vs. Virtual Images



Real images can be formed on a screen and are always inverted.



Virtual images cannot be formed on a screen and are always erect.

The Mirror Formula:

$$\frac{1}{f} = \frac{1}{v} + \frac{1}{u}$$

Magnification (m):

$$m = \frac{\text{Height of Image}}{\text{Height of Object}} = -\frac{v}{u}$$

A negative ' m ' indicates a real, inverted image.

Mirror Types	Concave Mirror	Convex Mirror
Action on Light	Converges (focuses) light	Diverges (spreads) light
Image Type	Mostly Real & inverted (one case of Virtual & Erect)	Always Virtual, Erect & Diminished
Common Uses	Shaving mirrors, dentist's tools, headlights	Vehicle side-view mirrors, security mirrors
Focal Length	Negative	Positive

3. Refraction, Lenses & Total Internal Reflection (TIR)


Refractive Index (μ)

A measure of how much light slows down in a medium.

$$\mu = \frac{\text{Speed of light in vacuum}}{\text{Speed of light in medium}}$$

Total Internal Reflection (TIR)

1. Light travels from a denser to a rarer medium.
2. Angle of incidence is greater than the critical angle.

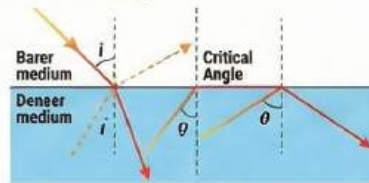

Total Internal Reflection (TIR)

The Lens Formula:

$$\frac{1}{f} = \frac{1}{v} - \frac{1}{u}$$

Lens Maker's Formula:

$$\frac{1}{f} = (\mu - 1) \left(\frac{1}{R_1} - \frac{1}{R_2} \right)$$

Power of a Lens (P):


The ability of a lens to converge or diverge light, measured in Diopters (D).

$P = 1/f$ (where f is in meters).


Positive for convex, negative for concave.



Application of TIR: Optical Fibers
Used to transmit data over long distances as light signals, which undergo continuous TIR within a glass or plastic fiber.




4. The Prism

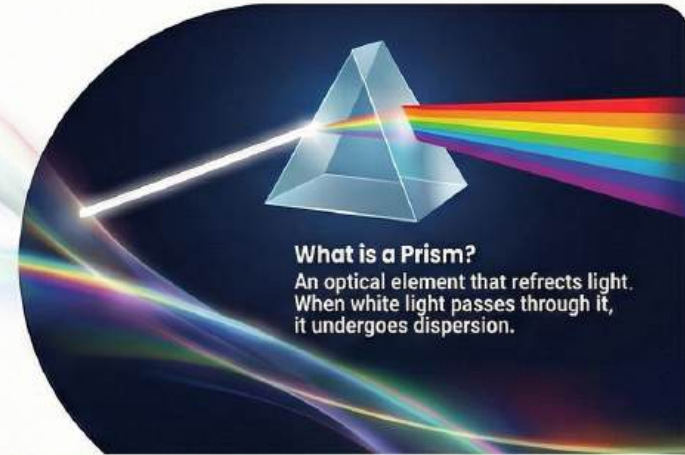

What is a Prism?

An optical element that refracts light. When white light passes through it, it undergoes dispersion.

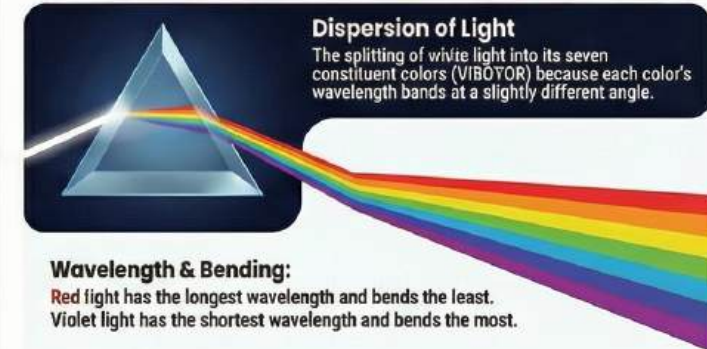

Dispersion of Light

The splitting of white light into its seven constituent colors (VIBGYOR) because each color's wavelength bends at a slightly different angle.

Wavelength & Bending:

Red light has the longest wavelength and bends the least.
Violet light has the shortest wavelength and bends the most.

The Prism Formula

Calculates the refractive index (μ) of the prism's material using the Angle of Prism (A) and the Angle of Minimum Deviation (δ_m):

$$\mu = \frac{\sin\left(\left(A + \frac{\delta_m}{2}\right)/2\right)}{\sin\left(\frac{A}{2}\right)}$$

Lens Types	Convex Lens	Concave Lens
Action on Light	Converges (focuses) light	Diverges (spreads) light
Shape	Thicker in the middle, thinner at the edges	Thinner in the middle, thicker at the edges
Image Type	Mostly Real & Inverted (one case of Virtual & Erect)	Always Virtual, Erect & Diminished
Common Uses	Magnifying glasses, microscopes, cameras	Eyeglasses for nearsightedness, telescopes

TWO VIEWS OF LIGHT: THE BRANCHES OF OPTICS



RAY (GEOMETRICAL) OPTICS
Treats light as a straight ray.
Explains reflection, refraction.



WAVE OPTICS
Treats light as a wave. Explains interference, diffraction, polarization.

HISTORICAL THEORIES OF LIGHT



Newton's Corpuscular Theory
Proposed that light is composed of tiny, perfectly elastic particles called

SUCCESSSES & FAILURES

Success: Reflection, refraction.
Failure: Interference, diffraction, polarization.



Huygens' Wave Theory
Light is a wave propagating through an ether medium.

SUCCESSSES & FAILURES

Success: Reflection, refraction, interference, diffraction, polarization.
Failure: Photoelectric effect, light speed in denser media.

A Visual Guide to Wave Optics


HUYGENS' PRINCIPLE: HOW LIGHT WAVES TRAVEL

What is a Wavefront?
Locus of all points oscillating in the same phase.

DIRECTION OF LIGHT

Step 1: Secondary Wavelets

3 Types of Wavefronts




INTERFERENCE: WHEN LIGHT WAVES MEET

Superposition Principle: Resultant displacement is the vector sum of individual displacements.

What is Interference?
Modification in light energy distribution when coherent waves waves superpose.

CONSTRUCTIVE



DESTRUCTIVE




CONDITIONS FOR INTERFERENCE

Type of interference	Path Difference (Δs)	Phase Difference ($\Delta \phi$)
Constructive	$n\lambda$	$2n\pi$
Destructive	$(2n + 1)\lambda/2$	$(2n + 1)\pi$

($n = 0, 1, 2, 3, \dots$)

YOUNG'S DOUBLE SLIT EXPERIMENT (YDSE)

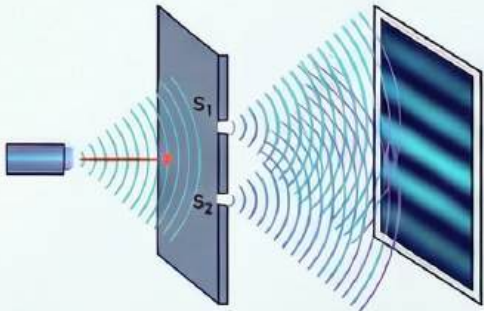

The First Proof of Light's Wave Nature

Alternating Bright and Dark Fringes
Predictable pattern of bright (constructive) and dark (destructive) bands.



Fringe Width (β)

$$\beta = \frac{\lambda D}{d}$$

- λ : wavelength
- D : screen-slit distance
- d : slit separation


Energy is Redistributed, Not Created

The dark fringes are dark because their light energy has been redistributed to the bright fringes, making them extra bright. This adheres to the law of conservation of energy.

Coherent Sources are Essential

The experiment requires coherent sources, which emit light of the same frequency with a constant phase difference. This is achieved by splitting light from a single source into two.

DIFFRACTION: WHEN LIGHT BENDS



Bending Around Corners:
Light bends around obstacles, entering the shadow region.

When is Diffraction Noticeable?
Most prominent when obstacle size is comparable to wavelength (λ).

Diffraction Pattern vs. YDSE Pattern
Unlike uniform YDSE fringes, diffraction has a very bright, wide central maximum with much weaker secondary maxima.

THE DUAL NATURE OF MATTER & RADIATION: A VISUAL REVISION GUIDE

@ThunderStudy

The Core Concept: Light's Dual Nature




Wave Nature
Interference and diffraction demonstrate light's wave nature.

Light behaves as a wave in some phenomena and as a particle in others. This is called the Dual Nature of Radiation.

Particle Nature
The Photoelectric Effect demonstrates its particle nature.


Understanding the Basics



Work Function (Φ_0 or W)
The minimum amount of energy required to eject a free electron from a metal surface.

Work Functions of Different Metals

- Cesium: 2.14 eV
- Potassium: 2.3 eV
- Platinum: 5.65 eV



What is an Electron Volt (eV)?
A small unit of energy, it's the energy an electron gains when accelerated by a potential difference of 1 Volt.

Energy Conversion
 $1 \text{ eV} = 1.6 \times 10^{-19} \text{ Joules}$

Four Ways to Eject an Electron (Electron Emission)




Thermionic Emission
Ejecting electrons by heating a metal (providing thermal energy).



Photoelectric Emission
Ejecting electrons (photoelectrons) by shining light of a suitable frequency on a metal.



Secondary Emission
A fast-moving "primary" electron strikes a surface, knocking out a "secondary" electron.



Field Emission
Pulling an electron out of a metal surface using a very strong electric field.

Einstein's Explanation: The Photon



Light is made of Photons
Einstein proposed that light consists of discrete energy packets called photons.

Photon Energy

$$E = h\nu$$

h = Planck's Constant ($6.67 \times 10^{-34} \text{ J}\cdot\text{s}$)


Properties of a Photon
Photons are chargeless, have zero rest mass, and travel at the speed of light.

Einstein's Photoelectric Equation


$$h\nu = \Phi_0 + KE_{\max}$$

Key Graphs of the Photoelectric Effect


Kinetic Energy vs. Frequency
Straight line, starts at threshold frequency (ν_0), y-intercept is $-\Phi_0$.




Current vs. Intensity
Straight line passing through origin; current is proportional to intensity.



Effect of Intensity on Stopping Potential
Higher intensity = higher saturation current, but same stopping potential.



Effect of Frequency on Stopping Potential
Higher frequency = more negative stopping potential, same saturation current.



De Broglie's Hypothesis: Matter has Waves Too

Every Moving Particle has a Wave
De Broglie proposed that any moving matter has an associated matter wave.



Why Don't We See Waves in Daily Life?

For large mass (m), wavelength (λ) is incredibly small and undetectable.

De Broglie Wavelength

$$\lambda = \frac{h}{p} = \frac{h}{mv}$$

Wavelength of an Accelerated Electron

$$\lambda = \frac{12.27}{\sqrt{V}} \text{ Angströms (\AA)}$$

For an electron accelerated by a potential difference V .


Made By Dr Pragya

The Evolution of the Atom: From Plum Pudding to Bohr's Orbits

@ThunderStudy

1. The Early Idea: Thomson's Model

The "Plum Pudding" Model: Proposed that an atom is a uniform sphere of positive charge with negatively charged electrons embedded throughout, similar to plums in a pudding .. or seeds in a watermelon.

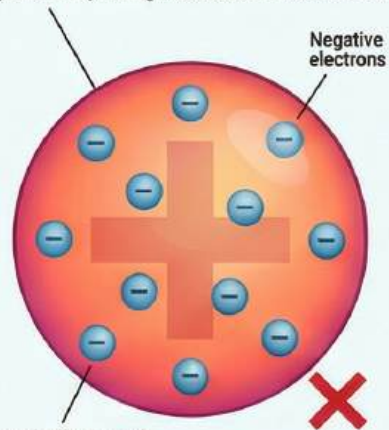


Electrically Neutral: The total positive charge of the sphere was balanced by the total negative charge of the electrons, resulting in a neutral atom.

Why It Failed: This model could not explain the results observed in Rutherford's subsequent gold foil scattering experiment.

2. The Game Changer: Rutherford's Gold Foil Experiment

The Experimental Setup: Alpha particles from a radioactive source were fired at a very thin gold foil, with a zinc sulfide screen and a rotatable microscope to detect where the particles landed.

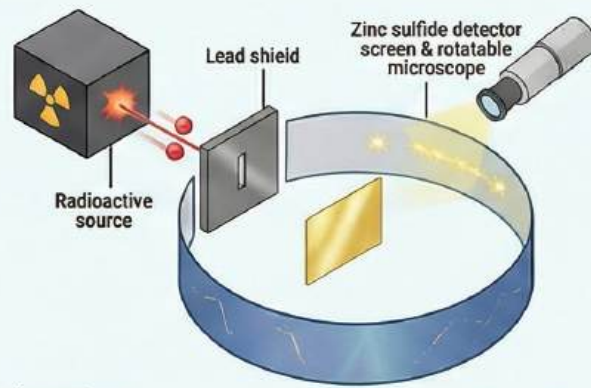

Observation 1: Most Particles Passed Straight Through: The vast majority of alpha particles went through the foil with little to no deflection ($\pm 1^\circ$), suggesting the atom is mostly empty space.


Observation 2: Some Particles Were Deflected: About 1 in 8000 particles were deflected by significant angles, indicating they encountered a repulsive force.

Observation 3: A Tiny Fraction Bounced Back: An extremely small number of particles (0.14% scattered $< 90^\circ$ with a mere few at 180°) were deflected back, suggesting a collision with something very dense and positively charged.

3. The Nuclear Model: Rutherford's Atom & Its Limitations

The Atom has a Dense, Positive Core: Rutherford concluded that all the positive charge and most of the atom's mass are concentrated in a tiny central region called the nucleus.

A "Planetary" Structure: Electrons are proposed to orbit the nucleus, much like planets orbit the sun, held by electrostatic attraction.

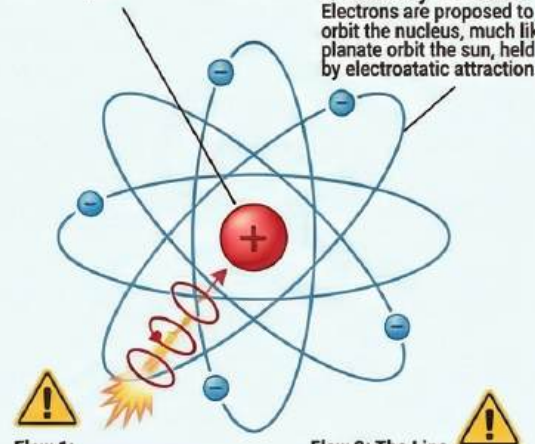


Flaw 1: The Instability Problem: According to classical physics, an orbiting electron should continuously radiate energy, lose speed, and spiral into the nucleus, causing the atom to collapse.

Flaw 2: The Line Spectroscopy Mystery: The model could not explain why atoms emit light only at specific, discrete wavelengths (line spectra) when heated.

4. The Quantum Leap: Bohr's Atomic Model

Postulate 1: Stable Orbits: Electrons revolve in specific, stable orbits called "stationary orbits" where they do not radiate energy.

Postulate 3: Quantized Angular Momentum: An electron can only be in an orbit where its angular momentum (mvr) is an integral multiple of $\hbar/2\pi$. (Formula: $mvr = n\hbar$)

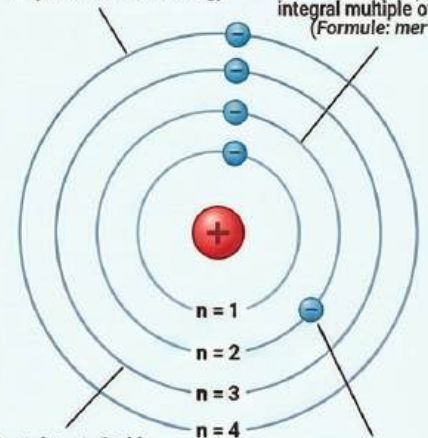

Postulate 1: Stable Orbits: Electrons revolve in specific, stable orbits called "stationary orbits" where they do not radiate energy.


Postulate 3: Energy Transitions: An electron emits or absorbs energy (as a photon) only when it jumps between these allowed orbits. The photon's energy equals the energy difference between the orbits ($E = E_2 - E_1$).

5. Understanding Atomic Behavior: Key Concepts & Spectra

Key Concepts

Distance of Closest Approach: The minimum distance an alpha particle gets to the nucleus before its kinetic energy is fully converted to potential energy and it is repelled back. This helps estimate the size of the nucleus.


Impact Parameter: The perpendicular distance between the path of an alpha particle and the center of the nucleus. A smaller impact parameter results in a larger scattering angle.



Atomic Spectra: When atoms are excited, electrons jump to higher orbits and then fall back, emitting light of specific wavelengths. This creates a unique "line spectrum" for each element.

	Series Name	Final Orbit (n_1)	Originating Orbits (n_2)	Spectral Region
Lyman		1 (Innermost)	2, 3, 4... ∞	Ultraviolet
Balmer		2	3, 4, 5... ∞	Visible
Paschen		3	4, 5, 6... ∞	Infrared
Brackett		4	5, 6, 7... ∞	Infrared
Pfund		5 (Outermost)	6, 7, 8... ∞	Far Infrared

The Anatomy of a Nucleus

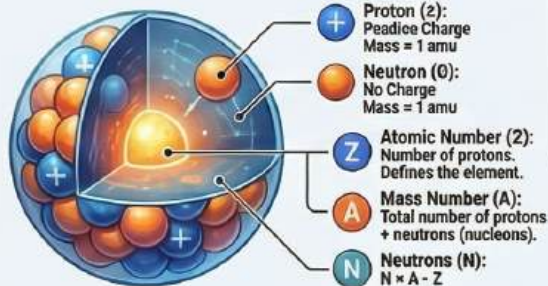


The Nucleus: The Atom's Core

Control part, concentrated protons & neutrons, containing all positive charge and almost all mass.


Decoding Uranium-235 (^{235}U)

^{92}U $Z \times 92$ (82 protons)
 ^{92}U $A \times 235$ (Total nucleons)
 $N \times 235 - 92 = 143$ neutrons.

A Quick Guide to the Atomic Nucleus

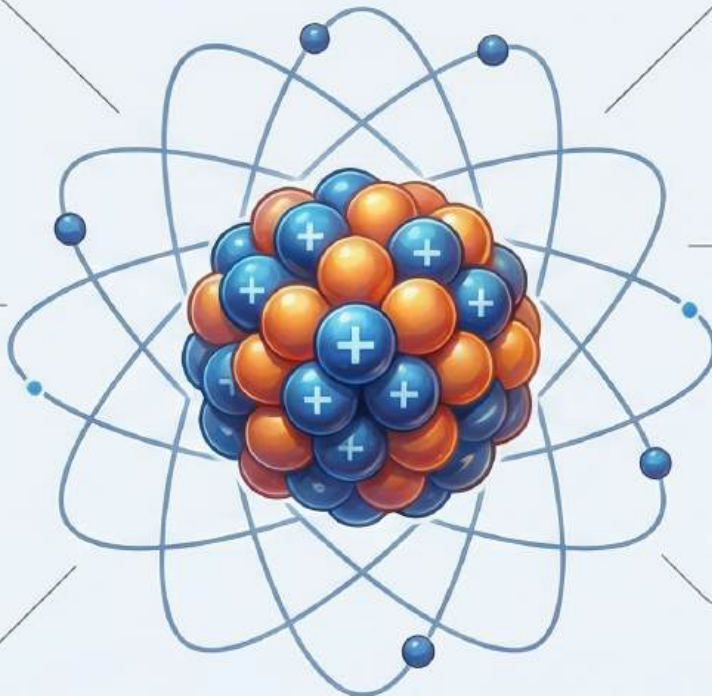

Key Properties & Measurements

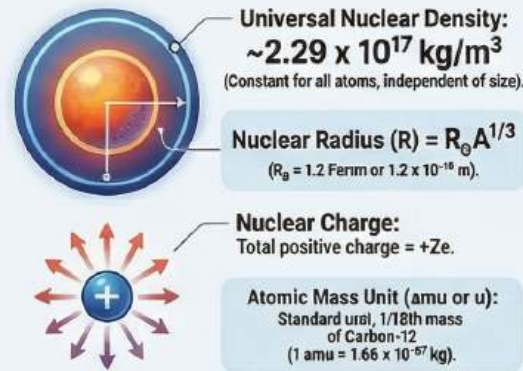


The Force That Binds




The Strong Nuclear Force

Powerful attractive force holding nucleons together, overcoming electrostatic repulsion.



Classifying Nuclei

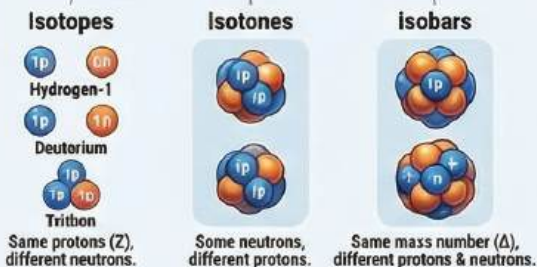

Mass, Energy, and Stability



Mass Defect (Δm)

Nucleus mass < Total mass of individual nucleons. "Missing" mass converts to energy.

$$E = mc^2$$

Binding Energy (BE):


Energy released when nucleus forms. Energy equivalent of mass defect.

The Magic Number:

1 amu = 931 MeV BE.

Higher BE/A = More stable nucleus.

Iron-56 (Fe) is most stable (~0.6 MeV).



Nuclear Reactions: Fission vs. Fusion




Process	Heavy nucleus splits into lighter ones	Two light nuclei combine to form heavier one
Trigger	Heavy nucleus absorbs slow neutron	Extremely high temperatures & pressure
Example	Uranium-235 splitting	Hydrogen isotopes fusing to Helium (Sun)
Energy Release	Huge (e.g., ~200 MeV per U-235)	Even more per nucleon than fission
Byproducts	More neutrons, can cause chain reaction	Neutrons or other particles
Application	Nuclear power plants, atomic bombs	Stars, experimental reactors (ITER)


A Quick Guide to Semiconductors: From Silicon to Circuits

1. MATERIALS CLASSIFIED BY CONDUCTIVITY


CONDUCTORS:
The Electron Superhighways

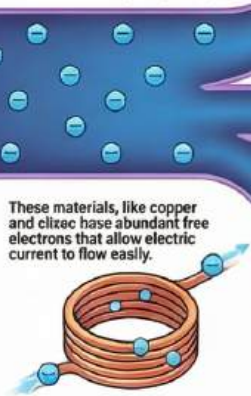

SEMICONDUCTORS:
The Smart Gates

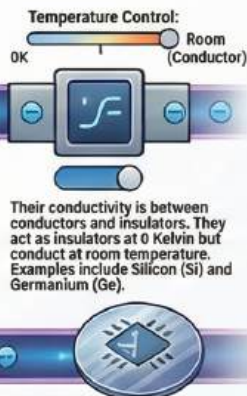


INSULATORS:
The Electrical Roadblocks

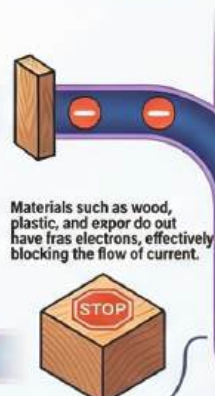

2. TYPES OF SEMICONDUCTORS: PURE VS. DOPED


INTRINSIC (Pure) SEMICONDUCTORS

These are made of a single, pure element like Silicon. Current is generated when heat provides enough energy to break covalent bonds, creating an equal number of free electrons and "holes".

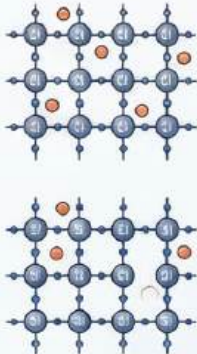


EXTRINSIC (Impure) SEMICONDUCTORS

N-TYPE: Creating Excess Electrons
Formed by adding pentavalent impurities (5 valence electrons), like Phosphorus, to Silicon. This creates a surplus of free electrons, which become the majority charge carriers.




P-TYPE: Creating "Holes"
Formed by adding trivalent impurities (3 valence electrons), like Aluminum, to Silicon. This results in a deficit of electrons, creating positively charged "holes" which act as majority charge carriers.




3. THE ENERGY BAND THEORY

Understanding Electron Energy Levels:
Electrons in a crystal exist in energy ranges called bands.

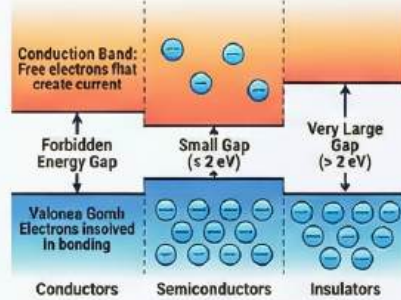


Understanding Electron Energy Levels:
Electrons in a crystal exist in energy ranges called bands.
Energy Gaps Determine Conductivity:
The "Forbidden Energy Gap" between these bands dictates if a material conducts.

Conductors: Zero Gap
Semiconductors: Small Gap (< 2 eV)
Silicon (Si): 1.1 eV
Germanium (Ge): 0.7 eV
Insulators: Very Large Gap (> 2 eV)

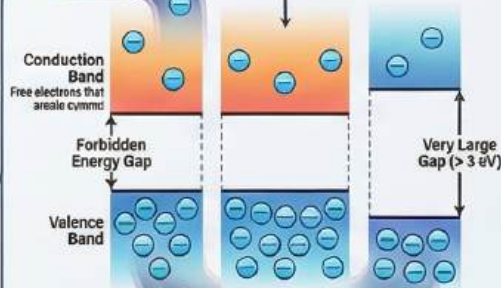

4. THE PN JUNCTION: HEART OF THE DIODE

Formation of the Depletion Layer:
When P-type and N-type materials are joined, electrons and holes diffuse across the junction, creating a central region with no mobile charge carriers called the depletion layer. This layer establishes a "Barrier Potential".

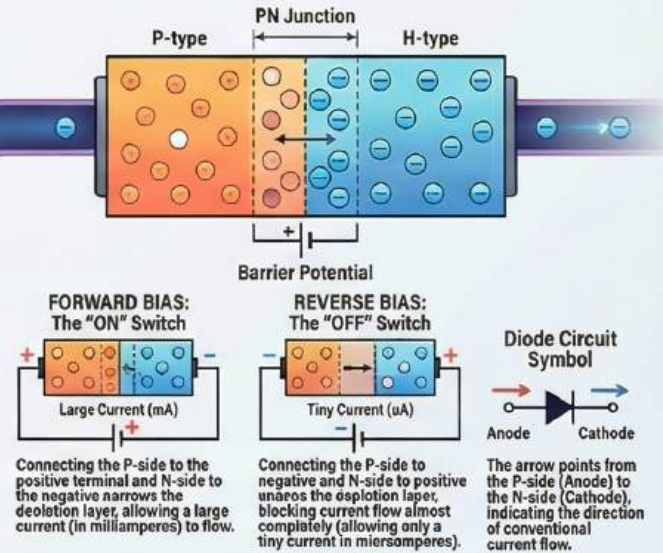

5. APPLICATION: RECTIFIERS - CONVERTING AC TO DC

What is a Rectifier? An electronic circuit that converts alternating current (AC) into one-directional Direct Current (DC), using the one-way current property of diodes.

HALF-WAVE RECTIFIER



Pulsating DC

Uses a single diode to allow only one half of the AC wave to pass through, blocking the other half. This results in a pulsating DC output with gaps.

FULL-WAVE RECTIFIER



Pulsating DC

Uses two or more diodes to convert both halves of the AC input wave into a continuous, pulsating DC output, making it more efficient.

-DC-

**Join thunder study official On
Telegram For More Study**

Click Here To Join

Electrostatics

-
- Coulomb's Law
 - Force between two point charges: $F = k \frac{|q_1 q_2|}{r^2}$, where $k = \frac{1}{4\pi\epsilon_0}$
 - $\epsilon_0 = 8.854 \times 10^{-12} \text{ C}^2\text{N}^{-1}\text{m}^{-2}$
-
- Electric Field
 - Electric field due to a point charge: $E = k \frac{|q|}{r^2}$
 - Electric field intensity: $\vec{E} = \frac{\vec{E}}{\epsilon_0}$
 - Electric dipole moment: $\vec{p} = q(2\vec{a})$
 - Torque on a dipole in uniform E-field: $\vec{\tau} = \vec{p} \times \vec{E}$
-
- Electric Potential
 - Electric potential due to a point charge: $V = k \frac{q}{r}$
 - Potential energy of a dipole in E-field: $U = -\vec{p} \cdot \vec{E}$
 - Potential difference: $V_B - V_A = \frac{W_{AB}}{q_0}$
-
- Gauss's Law
 - Electric flux: $\Phi_E = \oint \vec{E} \cdot d\vec{A} = \frac{Q_{enc}}{\epsilon_0}$
 - For an infinite line charge: $E = \frac{\lambda}{2\pi\epsilon_0 r}$
 - For an infinite plane sheet: $E = \frac{\sigma}{2\epsilon_0}$
 - For a spherical shell (outside): $E = \frac{Q}{4\pi\epsilon_0 r^2}$
 - For a spherical shell (inside): $E = 0$

Capacitance

-
- Capacitance
 - Definition: $C = \frac{Q}{V}$
 - Parallel plate capacitor: $C = \frac{\epsilon_0 A}{d}$
 - With dielectric: $C = \frac{K\epsilon_0 A}{d}$
-
- Capacitors in Combination
 - Series: $\frac{1}{C_{eq}} = \frac{1}{C_1} + \frac{1}{C_2} + \dots$
 - Parallel: $C_{eq} = C_1 + C_2 + \dots$
-
- Energy Stored
 - Energy stored in a capacitor: $U = \frac{1}{2} CV^2 = \frac{1}{2} \frac{Q^2}{C} = \frac{1}{2} QV$
 - Energy density: $u = \frac{1}{2} \epsilon_0 E^2$

Current Electricity

-
- Electric Current
 - Current: $I = \frac{dQ}{dt}$
 - Drift velocity: $v_d = \frac{-eE\tau}{m}$
 - Relation between current and drift velocity: $I = nAev_d$
-
- Ohm's Law and Resistance
 - Ohm's Law: $V = IR$
 - Resistance: $R = \rho \frac{L}{A}$
 - Resistivity: $\rho = \frac{m}{ne^2\tau}$
 - Temperature dependence of resistance: $R_T = R_0[1 + \alpha(T - T_0)]$
-
- Resistances in Combination
 - Series: $R_{eq} = R_1 + R_2 + \dots$
 - Parallel: $\frac{1}{R_{eq}} = \frac{1}{R_1} + \frac{1}{R_2} + \dots$
-
- Kirchhoff's Laws
 - Junction Rule (KCL): $\sum I = 0$
 - Loop Rule (KVL): $\sum \Delta V = 0$
-
- Power
 - Electric power: $P = VI = I^2 R = \frac{V^2}{R}$
 - Energy consumed: $E = P \times t$

Magnetism

-
- Biot-Savart Law
 - Magnetic field due to a current element: $d\vec{B} = \frac{\mu_0}{4\pi} \frac{I d\vec{l} \times \vec{r}}{r^3}$

-
- Magnetic field at center of circular loop: $B = \frac{\mu_0 I}{2R}$
- Magnetic field on axis of circular loop: $B = \frac{\mu_0 I R^2}{2(R^2 + x^2)^{3/2}}$
-
- Ampere's Circuital Law
 - $\oint \vec{B} \cdot d\vec{l} = \mu_0 I_{enc}$
 - Magnetic field due to a straight infinite wire: $B = \frac{\mu_0 I}{2\pi r}$
 - Magnetic field inside a solenoid: $B = \mu_0 n I$
 - Magnetic field inside a toroid: $B = \frac{\mu_0 N I}{2\pi r}$

Force on Moving Charges and Current

- Lorentz force: $\vec{F} = q(\vec{E} + \vec{v} \times \vec{B})$
- Magnetic force on a charge: $\vec{F} = q(\vec{v} \times \vec{B})$
- Magnetic force on a current-carrying conductor: $\vec{F} = I(\vec{L} \times \vec{B})$
- Force between two parallel current-carrying wires: $F = \frac{\mu_0}{2\pi} \frac{I_1 I_2}{d} L$

Torque on a Current Loop

- Magnetic dipole moment: $\vec{M} = IA\hat{n}$
- Torque on a current loop: $\vec{\tau} = \vec{M} \times \vec{B}$
- Moving coil galvanometer (deflection): $\alpha \propto I$

Electromagnetic Induction & AC

-
- Faraday's Laws of EMI
 - Magnetic flux: $\Phi_B = \int \vec{B} \cdot d\vec{A}$
 - Induced EMF: $\epsilon = -\frac{d\Phi_B}{dt}$
 - Motional EMF: $\epsilon = BLv$
-
- Self and Mutual Induction
 - Self-inductance: $\Phi = LI \Rightarrow \epsilon = -L \frac{dI}{dt}$
 - Mutual inductance: $\Phi_2 = MI_1 \Rightarrow \epsilon_2 = -M \frac{dI_1}{dt}$
 - Energy stored in an inductor: $U = \frac{1}{2} LI^2$
-
- Alternating Current (AC)
 - RMS value: $I_{rms} = \frac{I_0}{\sqrt{2}}, V_{rms} = \frac{V_0}{\sqrt{2}}$
 - Inductive reactance: $X_L = \omega L = 2\pi f L$
 - Capacitive reactance: $X_C = \frac{1}{\omega C} = \frac{1}{2\pi f C}$
 - Impedance (LCR series circuit): $Z = \sqrt{R^2 + (X_L - X_C)^2}$
 - Phase angle: $\tan \phi = \frac{X_L - X_C}{R}$
 - Power in AC circuit: $P = V_{rms} I_{rms} \cos \phi$ (Power factor $\cos \phi$)
 - Resonant frequency: $f_0 = \frac{1}{2\pi\sqrt{LC}}$
 - Transformer equation: $\frac{V_p}{V_s} = \frac{N_p}{N_s} = \frac{I_s}{I_p}$

Electromagnetic Waves

-
- Properties
 - Speed of EM waves in vacuum: $c = \frac{1}{\sqrt{\mu_0\epsilon_0}} = 3 \times 10^8 \text{ m/s}$
 - Speed of EM waves in medium: $v = \frac{1}{\sqrt{\mu\epsilon}}$
 - Relation between E and B fields: $E_0 = cB_0$
 - Displacement current: $I_D = \epsilon_0 \frac{d\Phi_E}{dt}$
 - Maxwell's Equations (integral form):
 - $\oint \vec{E} \cdot d\vec{A} = \frac{Q_{enc}}{\epsilon_0}$ (Gauss's Law for Electricity)
 - $\oint \vec{B} \cdot d\vec{A} = 0$ (Gauss's Law for Magnetism)
 - $\oint \vec{E} \cdot d\vec{l} = -\frac{d\Phi_B}{dt}$ (Faraday's Law)
 - $\oint \vec{B} \cdot d\vec{l} = \mu_0 I_c + \mu_0 \epsilon_0 \frac{d\Phi_E}{dt}$ (Ampere-Maxwell Law)

Optics

-
- Reflection and Refraction
 - Mirror formula: $\frac{1}{f} = \frac{1}{v} + \frac{1}{u}$
 - Magnification: $m = -\frac{v}{u} = \frac{h_i}{h_o}$
 - Refractive index: $n = \frac{c}{v}$
 - Snell's Law: $n_1 \sin i = n_2 \sin r$
 - Lens Maker's formula: $\frac{1}{f} = (n - 1) \left(\frac{1}{R_1} - \frac{1}{R_2} \right)$
 - Lens formula: $\frac{1}{f} = \frac{1}{v} - \frac{1}{u}$
 - Power of a lens: $P = \frac{1}{f}$ (in diopters, f in meters)
 - Total Internal Reflection (TIR): $\sin C = \frac{n_2}{n_1}$ (where $n_1 > n_2$)
-

Wave Optics

- Huygens' Principle: Each point on a wavefront is a source of secondary wavelets.
- Young's Double Slit Experiment (YDSE):
 - Path difference: $\Delta x = d \sin \theta$
 - For bright fringes: $\Delta x = n\lambda$
 - For dark fringes: $\Delta x = (n + \frac{1}{2})\lambda$
 - Fringe width: $\beta = \frac{\lambda D}{d}$
- Diffraction (single slit):
 - Condition for minima: $a \sin \theta = n\lambda$
 - Condition for maxima: $a \sin \theta = (n + \frac{1}{2})\lambda$
 - Width of central maximum: $\frac{2\lambda D}{a}$
- Malus's Law: $I = I_0 \cos^2 \theta$ (Polarization)
- Brewster's Law: $\tan i_p = n$

Dual Nature of Radiation and Matter

-
- Photoelectric Effect
 - Photon energy: $E = h\nu = \frac{hc}{\lambda}$
 - Einstein's photoelectric equation: $K_{max} = h\nu - \Phi_0 = h\nu - h\nu_0$
 - Work function: $\Phi_0 = h\nu_0$
 - Stopping potential: $eV_0 = K_{max}$
-

Matter Waves

- de Broglie wavelength: $\lambda = \frac{h}{p} = \frac{h}{mv}$
- For an electron accelerated through potential V: $\lambda = \frac{h}{\sqrt{2meV}}$

Atoms and Nuclei

-
- Bohr's Model of Hydrogen Atom
 - Radius of n-th orbit: $r_n = \frac{n^2 h^2 \epsilon_0}{\pi m e^2} = 0.529 \frac{n^2}{Z} \text{ \AA}$
 - Energy of n-th orbit: $E_n = -\frac{m e^4}{8 \epsilon_0^2 h^2 n^2} = -\frac{13.6}{n^2} \text{ eV}$
 - Wavelength of emitted photon: $\frac{1}{\lambda} = R \left(\frac{1}{n_f^2} - \frac{1}{n_i^2} \right)$, where R is Rydberg constant
-
- Nuclear Physics
 - Mass defect: $\Delta M = (Zm_p + Nm_n) - M_{nucleus}$
 - Binding energy: $E_b = \Delta M c^2$
 - Radioactive decay law: $N = N_0 e^{-\lambda t}$
 - Half-life: $T_{1/2} = \frac{\ln 2}{\lambda} = \frac{0.693}{\lambda}$
 - Mean life: $\tau = \frac{1}{\lambda}$
 - Activity: $A = -\frac{dN}{dt} = \lambda N$

Semiconductor Electronics

-
- Diodes
 - Forward bias: current flows
 - Reverse bias: very small current (leakage)
 - Ideal diode: acts as a short circuit in forward bias, open circuit in reverse bias.
-
- Transistors (BJT)
 - Current relations: $I_E = I_B + I_C$
 - Current gain (common emitter): $\beta = \frac{I_C}{I_B}$
 - Alpha (common base): $\alpha = \frac{I_C}{I_E}$
 - Relation between alpha and beta: $\beta = \frac{\alpha}{1-\alpha}$
-

Logic Gates

- Basic gates: AND, OR, NOT
- Universal gates: NAND, NOR
- Truth tables for all gates.

PHYSICS CLASS 12 BOARDS 2026

100% Guaranteed High Probability Question Set



WARNING: 95% PROBABILITY OF APPEARING IN EXAM

Based on the pyqs source provided, the questions marked with the "Danger" icon are the highest-probability questions identified in the material. These have been meticulously compiled along with highest-weightage topics for complete coverage.



95% PROBABILITY QUESTIONS ("DANGER" ICON)

Chapter 1: Electric Charges and Fields

Question: Calculate the electric field and intensity inside a solid sphere of radius R carrying a positive charge with a non-uniform volume charge density $\rho = \rho_0(1 - r/R)$.

Context: This involves using Gauss's Law for a solid sphere with variable density.

Chapter 3: Current Electricity

Question: Derive the expression for the equivalent EMF (ε_{eq}) and internal resistance (r_{eq}) of two batteries connected in **parallel**.

Context: Specifically focused on the formula $\varepsilon_{eq} = (\varepsilon_1 r_2 + \varepsilon_2 r_1) / (r_1 + r_2)$.

Chapter 4: Moving Charges and Magnetism

Question: A 100-turn rectangular coil is hung from a balance scale in a magnetic field. Calculate the additional mass m required to regain balance when the magnetic field is switched on.

Context: This tests the concept of magnetic force ($F = IlB$) balancing gravitational force.

Chapter 5: Magnetism and Matter

Question: A magnetic dipole is oriented in three different ways in a uniform magnetic field. Identify which orientation results in the **largest magnetic torque** and which has the **largest potential energy**.

Context: Relates to formulas $\tau = mB \sin\theta$ and $U = -mB \cos\theta$.

Chapter 6: Electromagnetic Induction

Question: Identify the correct graph showing the variation of **induced EMF (ϵ)** with time for a single-turn coil rotating in a uniform magnetic field.

Context: The EMF varies sinusoidally ($\epsilon = \epsilon_0 \sin \omega t$). You must pick the correct sine/cosine graph relative to the flux graph.

Chapter 9: Ray Optics

Question: Derive the Lens Maker's Formula.

Context: The question asks you to draw the ray diagram for image formation by a convex spherical surface and then extend it to derive the formula $1/f = (n-1)(1/R_1 - 1/R_2)$.

Chapter 10: Wave Optics

Question: Analyze the intensity distribution diagram for a **single slit diffraction** pattern. Determine the ratio of the width of the central maximum to the secondary maximum.

Context: Conceptual understanding of diffraction fringe widths ($2\lambda D/a$ vs $\lambda D/a$).

Chapter 13: Nuclei

Question: Study the **Binding Energy per nucleon** curve. Explain the release of energy in nuclear fission and fusion based on the stability of nuclei (mass numbers < 30 and > 170).

Context: This is a case-based/passage question connecting Einstein's mass-energy relation to the stability curve.

Chapter 2: Potential and Capacitance

- **Most Important:** Explain the difference in behavior of a **conductor** and a **dielectric** in the presence of an external electric field. Define polarization and susceptibility.
 - **Also:** Parallel plate capacitor energy and dielectric breakdown (Case Study).
-

Chapter 7: Alternating Current

- **Most Important:** A series LCR circuit connected to an ac source. Derive the expression for the **average power** dissipated and define **power factor**. Under what condition is power factor maximum?
 - **Also:** Transformer principles and energy losses (Step-up/Step-down).
-

Chapter 8: Electromagnetic Waves

- **Most Important:** Explain how the **Ampere-Maxwell law** explains the flow of current through a capacitor during charging. Write the expression for **displacement current**.
-

Chapter 11: Dual Nature of Radiation

- **Most Important:** Experimental study of the **Photoelectric Effect**. Analyze graphs of photoelectric current vs. anode potential for different frequencies and intensities.
-

Chapter 12: Atoms

- **Most Important:** **Alpha-particle scattering experiment**. Discuss the trajectory, impact parameter, and distance of closest approach.
 - **Also:** Bohr's quantization condition and spectral lines (Lyman, Balmer, etc.).
-

Chapter 14: Semiconductor Electronics

- **Most Important:** Draw and explain the **V-I characteristics of a p-n junction diode** in forward and reverse bias. Define threshold voltage and breakdown voltage.
 - **Also:** Half-wave and Full-wave rectifier diagrams and waveforms.
-
-

IMP Questions By Aashi Physics Thunderstudy
PRODUCED UNDER STRICT GUIDELINES - COPYRIGHT 2026

PHYSICS (THEORY) - 33-QUESTION BOARD MASTER PAPER

Strictly Compiled from Sets 55/7/1, 55/7/2, 55/5/2 (2024), 55/5/2(1) (2023)

MAX MARKS: 70

TIME: 3 HOURS

SECTION A (MCQS & ASSERTION-REASON)

1. Two nuclei have mass numbers in the ratio 27:64. The ratio of their nuclear densities is:
(A) 1:1(B) 3:4(C) 9:16(D) 27:64 Multiple Sets
2. A p-n junction diode is forward biased. As a result:
(A) Barrier increases(B) Depletion decreases(C) Depletion increases(D) No change Multiple Sets
3. Part of EM spectrum used in water purifiers to kill germs:
(A) Infrared(B) UV Rays(C) X-rays(D) Microwaves Set 55/7/1
4. Bohr orbit radius r is proportional to:
(A) n (B) n^2 (C) $1/n$ (D) $1/n^2$ Multiple Sets
5. Slope of V_0 vs frequency graph:
(A) h (B) h/e (C) ϕ_0 (D) e/h Set 55/7/1
6. Two parallel wires (2m apart, 3A same dir). Force per unit length:
(A) Attractive(B) Repulsive(C) Zero(D) Constant Set SR5QP
7. Ideal inductor across AC source. Current:
(A) Leads V by $\pi/2$ (B) Lags V by $\pi/2$ (C) Phase(D) Lags V by π Set 55/7/1
8. Amplitude of secondary wavelets is:
(A) Max forward/Zero back(B) Equal both(C) Zero forward(D) Max back Set SR5QP
9. Effective resistance between A and B (Bridge circuit Each resistance 2 ohm):
(A) 2 ohm(B) 6 ohm(C) $8/3$ ohm(D) 3 ohm Set 55/7/1
10. Dimensional formula for μ_0 :
(A) $[MLT^{-2}A^{-2}]$ (B) $[ML^2T^{-1}A^{-1}]$ Set 55/7/2
11. Ser LCR nature before/after resonance:
(A) Cap then Ind(B) Ind then Cap Multiple Sets
12. Metal rod ($L=50\text{cm}$, $v=10\text{m/s}$) in $B=0.4\text{G}$. Induced EMF:
(A) 0.2 mV(B) 2 mV Set 55/7/1
13. **Assertion:** EM waves no medium needed. **Reason:** They are transverse.
14. **Assertion:** Insulators forbade gap is large. **Reason:** Valence e^- tightly bound.
15. **Assertion:** Deflecting torque zero loop perp field. **Reason:** M parallel to B .
16. **Assertion:** Interference not seen if sources infinitely close. **Reason:** beta prop to separation.

SECTION B (2 MARKS)

17. Draw energy band diagrams for n-type and p-type at $T > 0\text{ K}$. Set 55/7/1/2
18. Ratio of drift velocities for wires L & $2L$ and Area A & $2A$ in series. Set 55/7/1/2
19. Calculate Binding Energy per nucleon of Helium nucleus. Set 55/7/2
20. Combo focal length of Convex (10cm) and Concave (15cm) lenses in contact. Set 55/7/1
21. Effect on De Broglie wavelength if accelerating potential increases. Set SR5QP

SECTION C (3 MARKS)

22. Using Huygens verify Snell's law OR Law of Reflection. Set SR5QP
23. Derive H-atom n th orbit radius expression (Bohr Postulates). Set 55/7/1
24. Force between two parallel current conductors. Define 1 Ampere. Set 55/7/1
25. Plot V_0 vs freq. Identify slope and work function from graph. Set 55/7/2
26. Mutual Inductance of two concentric coaxial circular coils. Set 55/7/1

27. Methods to increase MCG sensitivity. MCG to Voltmeter conversion.

Set 55/7/1

28. Potential Energy of 2-charge system in as external field E.

Set 55/7/2

SECTION D (CASE STUDY - 4 MARKS)

29. **Drift Velocity:** (i) Relaxation time vs Temp (ii) Derive $J = ne v_d$ (iii) Define Mobility.

30. **Lens Maker's:** (i) Focal length in water (ii) Multiple images (iii) f for $r_1=10$, $r_2=15$, $n=1.5$.

SECTION E (5 MARKS)

31. (a) Ray diagram for Telescope/Microscope & derive Magnification OR (b) Lens Maker Formula derivation.

32. (a) Working of p-n junction Full Wave Rectifier OR (b) MCG principle, working and radial field.

33. (a) Parallel Plate Cap with dielectric slab OR (b) Potential due to dipole on axial/equatorial line.

PREDICTED PHYSICS BOARD PAPER 2026

Based on Serial Repetition Analysis of 2023-2025 Sets

MAX MARKS: 70

TIME: 3 HOURS

SECTION A (Multiple Choice)

Q1. Two nuclei have mass numbers in the ratio 27:64. The ratio of their nuclear densities is:

- (a) 3:4 (b) 9:16 (c) 1:1 (d) 27:64

Repetition: Set 55/7/1, 55/7/2, 55/5/2

Q2. When a p-n junction diode is forward biased, the width of the depletion layer:

- (a) remains same (b) decreases (c) increases (d) becomes double

Q3. The slope of the stopping potential versus frequency graph for a photosensitive metal gives:

- (a) h (b) h/e (c) e (d) e/h

SECTION B (Short Answer - 3 Marks)

Q4. Define a wavefront. Using **Huygens' Principle**, verify the laws of Refraction (Snell's Law) at a plane surface.

Mandatory Derivation: 100% Frequency

Q5. Using Bohr's postulates for the hydrogen atom, derive the expression for the **radius of the n th orbit**. Show that $r \propto n^2$.

SECTION C (Case Study - 4 Marks)

Case Study: Lens Maker's Formula. High value lenses in astronomical telescopes require specific curvature. A double convex lens has $r_1=10\text{cm}$, $r_2=15\text{cm}$ and $n=1.5$.

(i) Calculate its focal length. (ii) If the lens is immersed in water ($n_w=1.33$), calculate the new focal length and describe the change.

SECTION D (Long Answer - 5 Marks)

Q6. Draw a labelled ray diagram of an **Astronomical Telescope** in normal adjustment. Derive the expression for its magnifying power.

--- OR ---

Draw a labelled ray diagram of a **Compound Microscope**. Derive magnification when image is formed at LDDV.

Q7. Explain the principle and working of a **Moving Coil Galvanometer**. Explain the function of the radial magnetic field.

--- OR ---

Explain **Full Wave Rectification** using p-n junction diodes. Draw the circuit and input/output waveforms.

Q8. Derive the expression for **Capacitance of a Parallel Plate Capacitor** when a dielectric slab is inserted between the plates.

--- OR ---

Derive the expression for **Electric Potential** at any point on the axis of an electric dipole.

PHYSICS COMPREHENSIVE MASTER TEST (18 QUESTIONS)

Complete Curated Exam Based on Sets 55/7/1, 55/7/2, 55/5/2, SR5QP/5

TIME: 3 HOURS

MAX MARKS: 70

SECTION A: OBJECTIVE & CONCEPTUAL

Q1. Two nuclei have mass numbers in the ratio 27:64. The ratio of their nuclear densities is:

Set 55/7/1, 55/5/2

- (A) 3 : 4
(B) 9 : 16
(C) 1 : 1
(D) 27 : 64

Q2. A p-n junction diode is forward biased. As a result, the potential barrier height:

Set 55/7/2, SR5QP/5

- (A) Increases
(B) Decreases
(C) Becomes Zero
(D) No change

Q3. Which part of the electromagnetic spectrum is used in water purifiers to kill germs?

Set 55/5/2

- (A) Infrared rays
(B) Ultraviolet rays
(C) X-rays
(D) Microwaves

Q4. The radius of the nth orbit in Bohr's model of the hydrogen atom is proportional to:

Set 55/7/1, 55/7/2

- (A) n
(B) n^2
(C) $1/n$
(D) $1/n^2$

Q5. Plot of stopping potential (V_0) vs frequency (ν) for a photosensitive metal. The slope represents:

Set 55/7/1, 55/5/1

- (A) h
(B) h/e
(C) e/h
(D) Work function

SECTION B: VERY SHORT ANSWER (2 MARKS)

Q6. Draw energy band diagrams of n-type and p-type semiconductors at temperature $T > 0$ K. Show donor/acceptor levels.

Set 55/5/2, SR5QP/5

Q7. Two wires (same material) of length L & 2L and areas A & 2A are in series with a battery. Find drift velocity ratio.

Set 55/7/2

Q8. Calculate the Binding Energy per nucleon of a Helium nucleus (${}^4_2\text{He}$) given constituent masses.

Set 55/7/1

SECTION C: SHORT ANSWER (3 MARKS)

Q9. Define a wavefront. Using Huygens' Principle, verify the laws of Refraction (Snell's Law) at a plane surface.

Set 55/5/2, SR5QP/5

Q10. Using Bohr's postulates, derive the expression for the radius of the nth orbit of H-atom.

Set 55/7/1, 55/7/2

Q11. Plot Stopping Potential vs Frequency. (i) What does x-intercept show? (ii) Find work function from graph.

Set 55/7/1

Q12. Derive expression for force per unit length between two parallel current conductors and define 1 Ampere.

Set 55/5/2

Q13. Calculate electrostatic potential energy of a two-charge system in an external electric field $E = A/(r^2)$.

Set SR5QP/5

SECTION D: CASE STUDY (4 MARKS)

Q14. Case Study: Drift Velocity & Resistivity.

Set 55/7/1, 55/7/2

(i) Define Relaxation Time.

(ii) Relate Current density (J) and drift velocity (vd).

(iii) How does resistivity of semiconductor change with temperature?

Q15. Case Study: Lens Maker's Formula.

Set 55/5/2

(i) Double convex lens: $r_1=10\text{cm}$, $r_2=15\text{cm}$, $n=1.5$. Find focal length.

(ii) What happens to ' f ' if immersed in water?

SECTION E: LONG ANSWER (5 MARKS)

Q16. (a) Ray diagram of Astronomical Telescope (Normal Adjustment) & derive Magnification.

Set 55/7/1, 55/7/2, SR5QP/5

--- OR ---

(b) Ray diagram of Compound Microscope & derive magnification for image at near point.

Q17. (a) Working of p-n junction as Full Wave Rectifier with circuit and waveforms.

Set 55/7/2, 55/5/2

--- OR ---

(b) Principle and working of Moving Coil Galvanometer. Explain radial field & Voltmeter conversion.

Q18. (a) Derive Capacitance of Parallel Plate Capacitor with dielectric slab insertion.

Set SR5QP/5

--- OR ---

(b) Derive Electric Potential due to an electric dipole at a point on its axis.

Comprehensive Practice Paper: Class 12

Physics (2025-26)

Aligned with Competency-Based Assessment Guidelines

This paper aggregates recurring high-value questions, derivations, and case studies found across previous year papers and sample materials, aligned with the 2025-26 syllabus weightage.

General Instructions:

- **Competency Focus:** 50% of the paper tests conceptual application (Case studies, reasoning).
- **Format:** Section A (MCQs), B (VSA), C (SA), D (Case-Based), E (Long Answer).

Section A: High-Yield MCQs & Concepts (1 Mark Each)

1. **Electrostatics:** A point P lies at a distance x from the mid-point of an electric dipole on its axis. The electric potential at point P is proportional to:
(a) $1/x^2$ (b) $1/x^3$ (c) $1/x^4$ (d) $1/x^{1/2}$
2. **Current Electricity:** If the potential difference V applied across a conductor is doubled (keeping length constant), how does the drift velocity v_d change?
(a) $v_d/2$ (b) v_d (c) $2v_d$ (d) $4v_d$
3. **Magnetism:** Which of the following statements is **not** true for nuclear forces?
(a) They are stronger than Coulomb forces.
(b) They saturate as the separation between two nucleons increases.
(c) They are always attractive.
(d) They depend on the charge of the nucleons.
4. **EM Waves:** Which electromagnetic waves are used in radar systems?
(a) Infrared waves (b) Ultraviolet rays (c) Microwaves (d) X-rays

5. **Optics:** In a Young's double-slit experiment, the fringe width is β . If the entire apparatus is immersed in a liquid of refractive index μ , the new fringe width will be:
(a) β (b) $\mu\beta$ (c) β/μ (d) β/μ^2

Section B: Conceptual & Very Short Answers (2 Marks)

6. **Current Electricity:** Explain briefly the formation of diffusion current and drift current in a p-n junction diode.
7. **Magnetism:** Define "Current Sensitivity" of a galvanometer. Explain how the current sensitivity of a galvanometer can be increased.
8. **Dual Nature:** The figure shows a plot of V_m^2 (maximum speed squared) versus $1/\lambda$ for photoelectrons. Using Einstein's photoelectric equation, obtain the expression for Planck's constant and the work function of the surface.
9. **Atoms:** Calculate the ratio of the nuclear densities of two nuclei having mass numbers 64 and 125.
10. **EM Induction:** Define mutual inductance. Write its SI unit.

Section C: Derivations & Short Answers (3 Marks)

11. **Optics (Wave):** State **Huygens' principle**. Using this principle, draw a ray diagram to show the refraction of a plane wave at a plane surface separating two media and verify **Snell's law** of refraction.
12. **Optics (Ray):** Draw a labelled ray diagram showing the image formation by a **refracting telescope** in normal adjustment. Define its magnifying power. Write two limitations of a refracting telescope over a reflecting telescope.
13. **AC Circuits:** A series LCR circuit is connected to an AC source $v = v_m \sin \omega t$. Derive an expression for the **impedance** of the circuit using a phasor diagram. Find the condition for **resonance**.
14. **Semiconductors:** Explain the working of a **p-n junction diode as a full-wave rectifier** with the help of a circuit diagram. Draw the input and output waveforms.
15. **Nuclei:** Draw a graph showing the variation of **Binding Energy per nucleon** with mass number A . Explain why light nuclei undergo nuclear fusion and heavy nuclei undergo nuclear fission based on this graph.

Section D: Competency & Case-Based Questions (4 Marks)

16. Case Study: Electrostatics (Capacitors)

Context: A parallel plate capacitor consists of two conducting plates separated by a distance. When charged, an electric field is set up.

- (i) Derive the expression for the capacitance of a parallel plate capacitor with a dielectric medium between its plates.
- (ii) If the air between the capacitor plates is replaced by a dielectric of constant $K=3$, what will be the potential difference between the plates if the charge remains constant?
- (iii) Which physical quantity remains constant when a capacitor is disconnected from a battery and a dielectric slab is inserted?

17. Case Study: Optics (Lenses)

Context: A thin lens is a transparent optical medium bounded by two surfaces. Using the lens maker's formula, one can determine the focal length.

- (i) A biconvex lens ($n=1.5$) has radii of curvature 20 cm each. Calculate its focal length.
- (ii) If this lens is immersed in water ($n=1.33$), how does its focal length change?

Section E: Long Answer Derivations (5 Marks)

18. **Electrostatics (Gauss Law):** (a) State **Gauss's Law**. (b) Derive an expression for the electric field due to a **uniformly charged infinite plane sheet**. (c) Find the electric field due to two infinite plane parallel sheets with charge densities $+\sigma$ and $-\sigma$.

19. **Magnetism (Moving Coil Galvanometer):** (a) Write the principle and explain the working with a labelled diagram. (b) Explain why the magnetic field is made radial. (c) How can you convert it into (i) an Ammeter and (ii) a Voltmeter?

20. **Current Electricity:** (a) Two cells of emfs E_1 and E_2 and internal resistances r_1 and r_2 are connected in parallel. Derive the expression for the **equivalent emf** and **equivalent internal resistance**. (b) A battery of emf 10 V and internal resistance $3\ \Omega$ is connected to a resistor. If the current is 0.5 A, calculate the resistance and the terminal voltage.

Important Topics & Weightage Checklist (2025-26)

Unit	Chapter / Topic	Weightage
Electrostatics	Gauss Law, Capacitance	16 Marks
Current Electricity	Drift Velocity, Kirchhoff's Rules	8 Marks
Magnetism	Biot-Savart, Ampere Law, Galvanometer	17 Marks
AC & EMI	LCR Circuit, Transformer, AC Generator	18 Marks
Optics	Lens Maker's, Microscope, YDSE, Huygens	17 Marks
Modern Physics	Photoelectric, Bohr's, BE Curve	12 Marks
Semiconductors	V-I Characteristics, Rectifiers	7 Marks

Study Tip: Focus on NCERT diagrams and graphs (especially for Binding Energy and Photoelectric effect) as rote learning is being replaced by competency-based conceptual questions.

**Physics Last Paper By Pragya Thunderstudy
(DO NOT REMOVE ANY TEXT)**

OFFICIAL ANSWER KEY & MARKING SCHEME

Class 12 Physics Practice Paper (2025-26)

Section A: MCQs (1 Mark Each)

1. (a) $1/x^2$

Reason: The electric potential V due to a short dipole at a distance x on its axis is given by $V = (1/4\pi\epsilon_0)(p/x^2)$.

2. (c) $2vd$

Reason: Drift velocity $vd = (e\tau/mL)V$. Thus, $vd \propto V$. If potential difference V is doubled, drift velocity doubles.

3. (c) They are always attractive.

Reason: This statement is NOT true. Nuclear forces become repulsive at very short distances (less than 0.8 fm) to prevent nuclear collapse.

4. (c) Microwaves

Reason: Microwaves are used in radar systems due to their short wavelength range, suitable for navigation.

5. (c) β/μ

Reason: Fringe width $\beta = \lambda D/d$. In liquid, $\lambda' = \lambda/\mu$. Therefore, the new fringe width is $\beta' = \beta/\mu$.

Section B: Very Short Answers (2 Marks)

6. Diffusion and Drift Current:

Diffusion: Concentration gradient (p to n holes, n to p electrons). Flows p-side to n-side.

Drift: Depletion region electric field sweeps minority carriers. Flows n-side to p-side.

7. Current Sensitivity:

Definition: Deflection per unit current. $I_s = \phi/I = NAB/k$.

Increase: Increase N, A, or B; or decrease torsional constant k.

8. Planck's Constant:

Formula: $v^2_{\max} = (2hc/m)(1/\lambda) - (2\phi_0/m)$.

Slope = $2hc/m \Rightarrow h = (m \times \text{Slope}) / 2c$. Intercept finds work function.

9. 1:1

Reason: Nuclear density is independent of mass number A. All nuclei have constant density $\approx 2.3 \times 10^{17} \text{ kg/m}^3$.

Section C: Short Answers & Derivations (3 Marks)

11. Huygens' Principle: Show plane wavefront incidence. Verify $\sin i / \sin r = v_1 / v_2 = \mu_{21}$.

13. LCR Circuit:

$$Z = \sqrt{R^2 + (X_L - X_C)^2}.$$

$$\text{Resonance: } X_L = X_C \Rightarrow \omega_0 = 1/\sqrt{LC}.$$

15. BE Curve: Curve peaks at Fe-56. Fusion occurs for low A to increase BE; Fission for high A to split into more stable nuclei.

Section D: Case Study Answers (4 Marks)

16. Capacitors:

(i) $C = K\epsilon_0 A/d$ (Increases by factor K).

(ii) $V' = V/K = V/3$ (Since Q is constant).

(iii) **Charge** remains constant (Isolated capacitor).

17. Lenses:

- (i) $1/f = (1.5 - 1)(2/20) = 0.05 \Rightarrow f = 20 \text{ cm}.$
(ii) Focal length increases in water.

Section E: Long Answers (5 Marks)

18. Gauss Law:

Sheet: $E = \sigma/2\epsilon_0$. Parallel sheets: $E = \sigma/\epsilon_0$ (between) and $E = 0$ (outside).

19. Galvanometer:

Radial Field: Ensures $\sin \theta = 1$ always. Torque is maximum and constant. Scale becomes linear ($I \propto \phi$).

20. Cells & Numerical:

Eq. EMF: $E_{eq} = (E_1 r_2 + E_2 r_1)/(r_1 + r_2).$
Numerical: $R = 17 \Omega, V = 8.5 \text{ V}.$

Physics Last Paper Answer Sheet By Pragya Thunderstudy
(Do not remove any text)



✨ Welcome to Thunder Study! ✨

Your one-stop destination for smart and effective learning 🚀

📖 We provide:

1. Topper Tips – Proven strategies from toppers to help you score high.
2. Topper Notes – Crisp, well-organized notes trusted by achievers.
3. Backbencher Notes – Easy-to-understand, quick revision notes for last-minute prep.
4. PYQs (Previous Year Questions) – Practice with real exam patterns.
5. NCERT Solutions – Detailed, simplified explanations of every concept.
6. Mock Tests – Exam-like practice to boost your confidence.
7. Mindmaps – Visual summaries for better retention & quick revision.
8. Important Questions – Handpicked high-probability questions.
9. And Much More – Covering all your academic needs in one place!

🎯 Perfect for Class 12 | CUET | CA | Banking aspirants who want to study smarter, not harder.

⚡ Thunder Study – Learn Smart, Revise Fast, Score Better!



@thunderstudy



@thunder_study_officialx



@thunder-study

Join On Social Media For Free
Study Material

Click To Join

@Thunderofficialx