
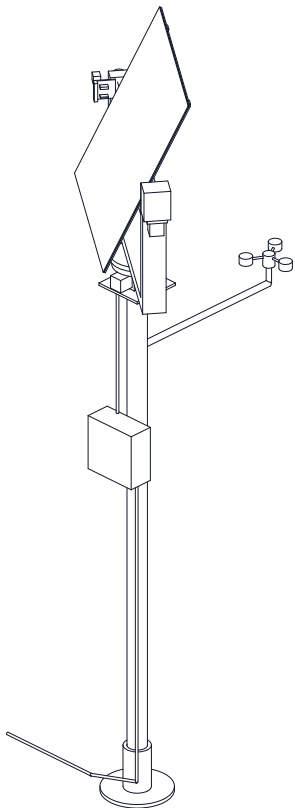


CONCEPT, NOT FOR FABRICATION

HelioLite · github.com/BoujeeEnjinia1701/heliolite

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	Stow stop and latch, preload springs added (DDR-002)	2026-09-25	AC

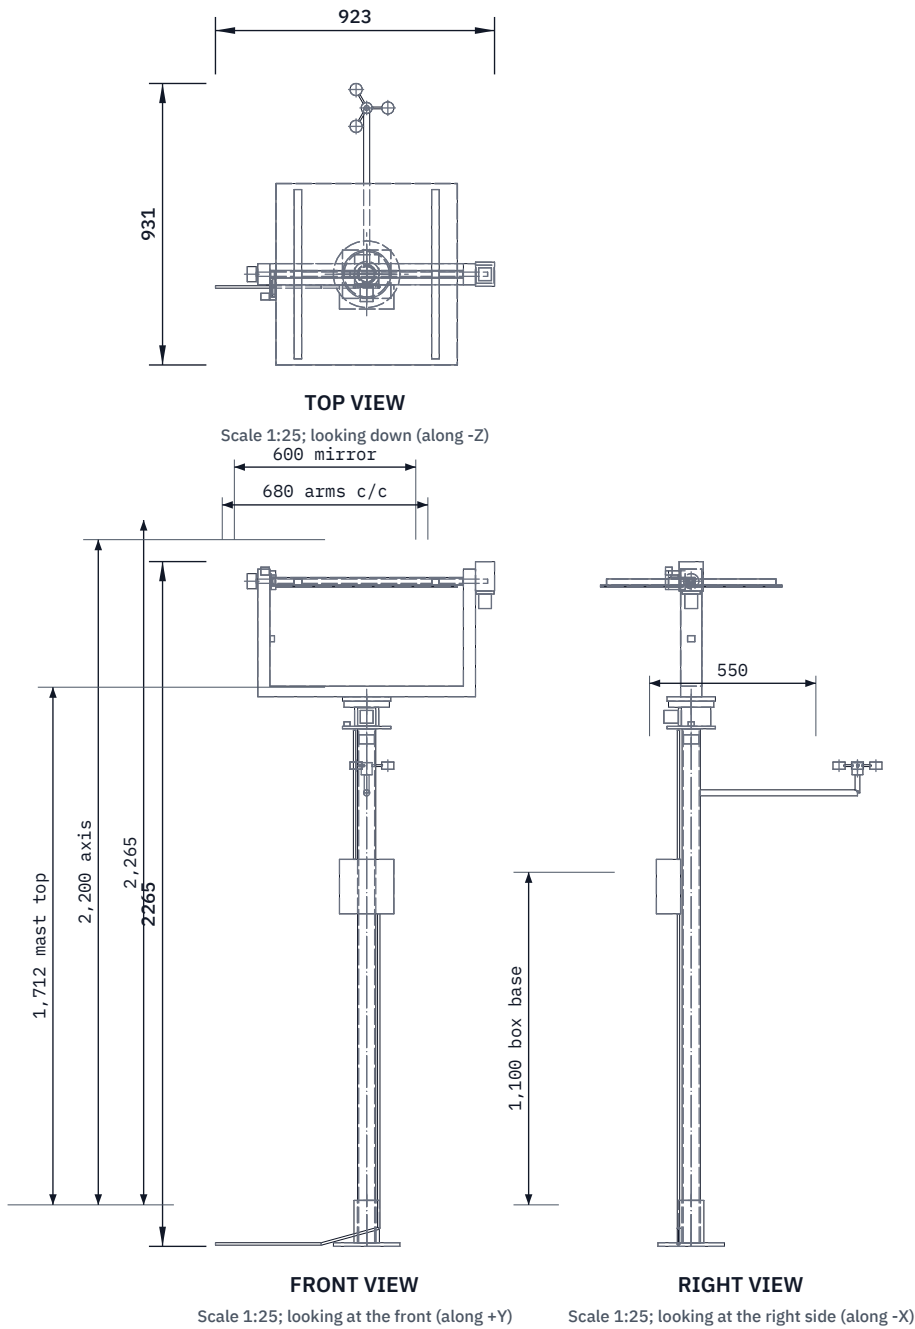

ISOMETRIC VIEW, TRACKING POSE
Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

- Mirror 600 x 600 x 3 glass on 4 ACP; sweep radius 301
- Elevation axis at Z 2,200; 25 sq. torque tube, 14 trunnions
- Yoke arms 40 x 70 at X +/-340; gaps 20 (arm), 46 (crossbar)
- Drives: NEMA17 on NMRV030-class 50:1, envelope 80 x 97 x 63, 14 bore
- Mast 60.3 x 3.9 galv. pipe, 1,700 long; cap 160 sq. x 8
- Anchor flange 220 dia.; ground screw 76 x 800 (not shown)
- Anemometer at Z 1,500, reach 550; controller box at Z 1,100
- Stow lug 8 thk at X -307; stop pad and latch pawl at R 55 on -X arm
- Preload spring cans 50 dia.: -X trunnion and mast top
- Top mass about 12.95 kg; stow face-down in 23 s (HLT-CAL-001)

General arrangement

DRAWING NO. HLT-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:25	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Glass mirror on ACP; printed ASA yoke; NMRV030-class drives; 60.3 mm galv. pipe. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	