| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| P1 | Making sketch for the prototype build plan | 2026-11-11 | AC |

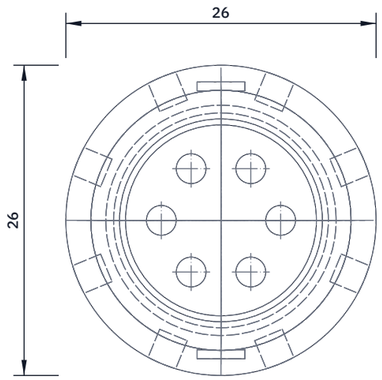


**TOP VIEW**

Scale 2:1; looking down (along -Z)

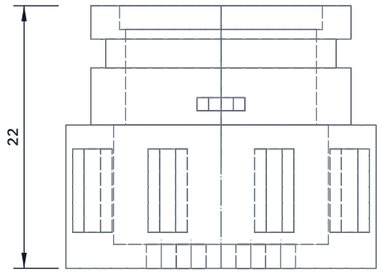


**FRONT VIEW**

Scale 2:1; looking at the front (along +Y)



**RIGHT VIEW**

Scale 2:1; looking at the right side (along -X)

**WHERE IT GOES**

This part in colour, its neighbours in grey

**HOW TO MAKE IT AND HOW IT FITS**

Head 26 mm across x 12 mm; eight 2.5 mm slots round the side, six 2.5 mm holes in the end
Spigot 21.8 mm x 10 mm; two lugs 4 x 1.1 mm, 0.7 mm proud, opposite each other
O-ring groove floor 19.3 +-0.05 mm, 2.4 mm wide, centred 6 mm up the spigot
Counterbore at the spigot top: 17 mm across, 2 mm deep, for the mesh and ring
Fits: spigot into the housing bottom, lugs down the slots, quarter turn
Check: O-ring fitted, cap turns a quarter turn by hand and stops

HELPFUL WATER A: FILTER STRAW  github.com/BoujeeEnjinia1701/helpful-water

# Intake cap: making sketch

| DRAWING NO. | REV | SHEET | SIZE |
|---|---|---|---|
| HWA-DWG-102 | P1 | 1 of 1 | ANSI B |

| SCALE | UNITS | PROJECTION | DATE | DRAWN |
|---|---|---|---|---|
| 2:1 | mm | | 2026-11-11 | Amish Chadha |

MATERIAL / NOTES

Polypropylene printed with the spigot up; moulded PP at scale

Licensed CERN-OHL-P-2.0 · Design Molecule Labs with Helpful Engineering

Generated from cad/src; do not edit by hand