



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW
Scale 1:25; looking down (along -Z)

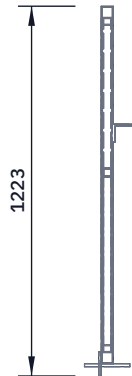

FRONT VIEW
Scale 1:25; looking at the front (along +Y)

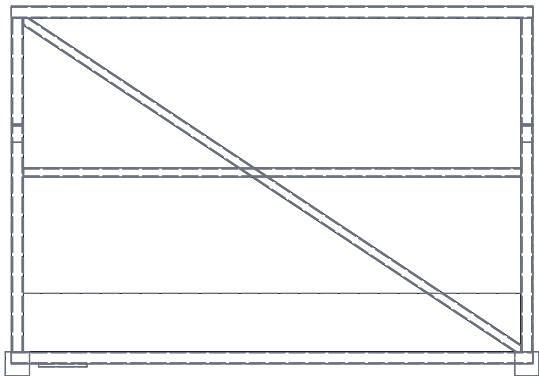

RIGHT VIEW
Scale 1:25; looking at the right side (along -X)

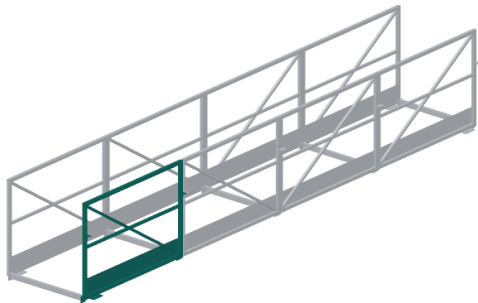

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make eight, four a side, on a flat jig. Drawn: side B end module.

Chords: SHS 40 x 40 x 3, 1,725 mm; centres 1,143 mm apart. The top chord is the top rail, 1,100 mm above the floor.

Verticals: SHS 40 x 40 x 4, 1,103 mm between the chords, flush with each end. Diagonal and knee rail: SHS 30 x 30 x 3; knee rail 550 mm above the floor. All joints welded all round.

Toe board: 2 mm sheet, 150 mm above the floor, on the inner edge.

Splice holes: three pairs of 13 mm holes through each end vertical, at 60, 560 and 1,060 mm up, for six M12 bolts per splice.

Bearer cleats: 8 x 80 x 80 mm plate on the chord's inner face at each end, reaching 40 mm below it, four 13 mm holes.

End modules: 10 mm foot plate 150 x 160 mm under the chord.

Side B: 6 mm shelf brackets for the carriage rail on both verticals.

Check: flat within 3 mm; about 39 kg (two people).

KILNDECK				github.com/BoujeeEnjinia1701/kilndeck			
KilnDeck side truss module (make 8): making sketch							
DRAWING NO. KND-DWG-103			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:25	UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES SHS 40 x 40 x 3 and 4 mm; SHS 30 x 30 x 3 mm; 2 mm sheet; 6, 8, 10 mm plate; S275							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	